

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839175

Luminaire Tested: **LD4C08D010 EU4089050 4LBSLI**

Issue Date: 2/9/2022



Test Information

Test Method: LM-79-08
Report Number: P839175
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208407)
Test Lab: INNOVATION CENTER
Issue Date: 2/9/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C08D010 EU4089050 4LBSLI
Description: 4 INCH 800 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS AND 4LBS TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 934.0 lumens
Efficiency: N/A
Efficacy: 94.3 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.9
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P839175
CATALOG NUMBER: LD4C08D010 EU4089050 4LBSLI

Luminous Intensity Polar Plot

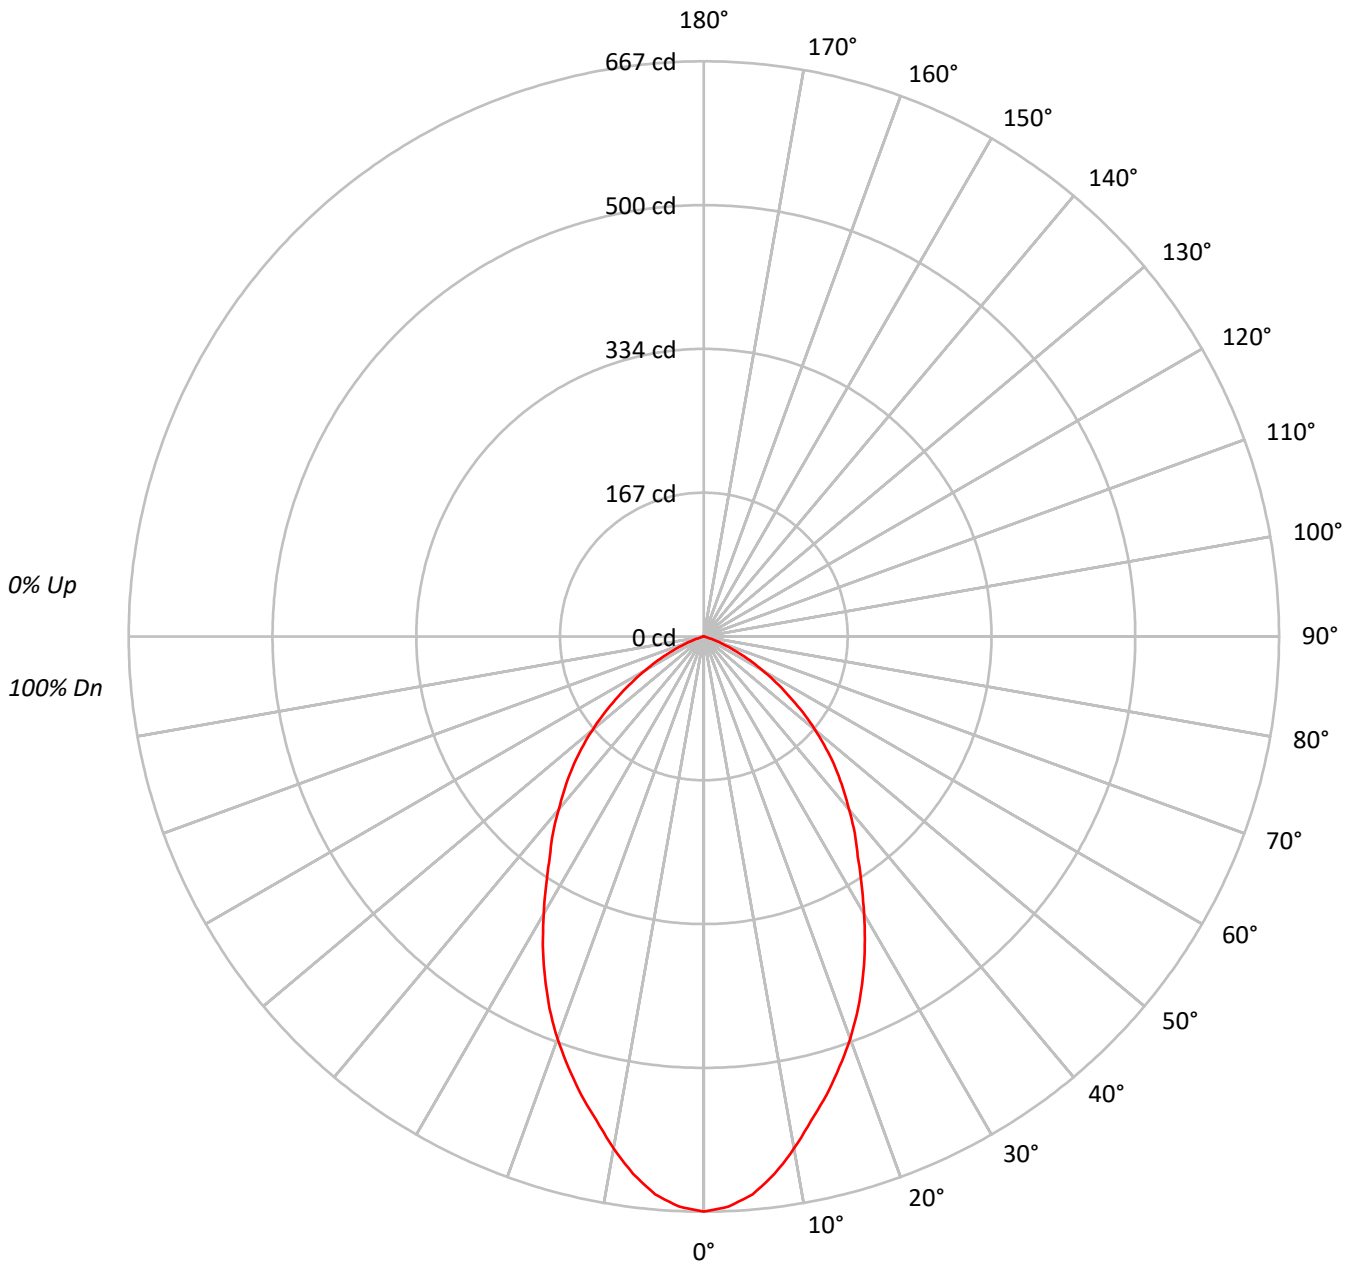



TEST NUMBER: P839175

CATALOG NUMBER: LD4C08D010 EU4089050 4LBSLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90																			
2	104	98	93	88	102	96	91	87	93	89	85	90	86	84	87	84	82	80																			
3	97	89	82	77	95	87	81	77	84	79	75	82	78	74	79	76	73	71																			
4	90	81	73	68	88	79	73	68	77	71	67	75	70	66	73	69	65	63																			
5	84	73	66	61	82	72	65	60	70	64	60	69	63	59	67	62	59	57																			
6	79	67	60	54	77	66	59	54	65	58	54	63	58	53	62	57	53	51																			
7	74	62	54	49	72	61	54	49	60	53	49	58	53	48	57	52	48	46																			
8	69	57	50	45	68	57	50	45	55	49	45	54	49	44	53	48	44	42																			
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	44	41	39																			
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	46	41	37	36																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	81931
5°	80073
10°	75199
15°	69966
20°	64885
25°	59142
30°	52658
35°	46673
40°	41954
45°	37545
50°	32205
55°	25917
60°	19313
65°	12326
70°	5927
75°	997
80°	707
85°	0



TEST NUMBER: P839175

CATALOG NUMBER: LD4C08D010 EU4089050 4LBSLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.5	6.5
10°-20°	154.2	16.5
20°-30°	199.8	21.4
30°-40°	195.8	21.0
40°-50°	166.0	17.8
50°-60°	108.8	11.7
60°-70°	43.7	4.7
70°-80°	5.0	0.5
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	414.5	44.4
0°-40°	610.4	65.3
0°-60°	885.2	94.8
0°-90°	934.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	934.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	667	
5°	649	60
15°	550	154
25°	436	200
35°	311	196
45°	216	166
55°	121	109
65°	42	44
75°	2	5
85°	0	0
90°	0	



TEST NUMBER: P839175

CATALOG NUMBER: LD4C08D010 EU4089050 4LBSLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	666.9
2.5°	661.7
5°	649.3
7.5°	628.6
10°	602.8
12.5°	574.9
15°	550.1
17.5°	523.2
20°	496.3
22.5°	467.4
25°	436.3
27.5°	404.3
30°	371.2
32.5°	340.2
35°	311.2
37.5°	287.5
40°	261.6
42.5°	238.8
45°	216.1
47.5°	192.3
50°	168.5
52.5°	144.8
55°	121.0
57.5°	99.3
60°	78.6
62.5°	60.0
65°	42.4
67.5°	27.9
70°	16.5
72.5°	7.2
75°	2.1
77.5°	1.0
80°	1.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)