

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839205

Luminaire Tested: **LD4C10D010 EU4109050 4LBSLI**

Issue Date: 2/9/2022



Test Information

Test Method: LM-79-08
Report Number: P839205
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208407)
Test Lab: INNOVATION CENTER
Issue Date: 2/9/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C10D010 EU4109050 4LBSLI
Description: 4 INCH 1000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS
AND 4LBS TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1070.0 lumens
Efficiency: N/A
Efficacy: 109.2 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.8
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P839205

CATALOG NUMBER: LD4C10D010 EU4109050 4LBSLI

Luminous Intensity Polar Plot

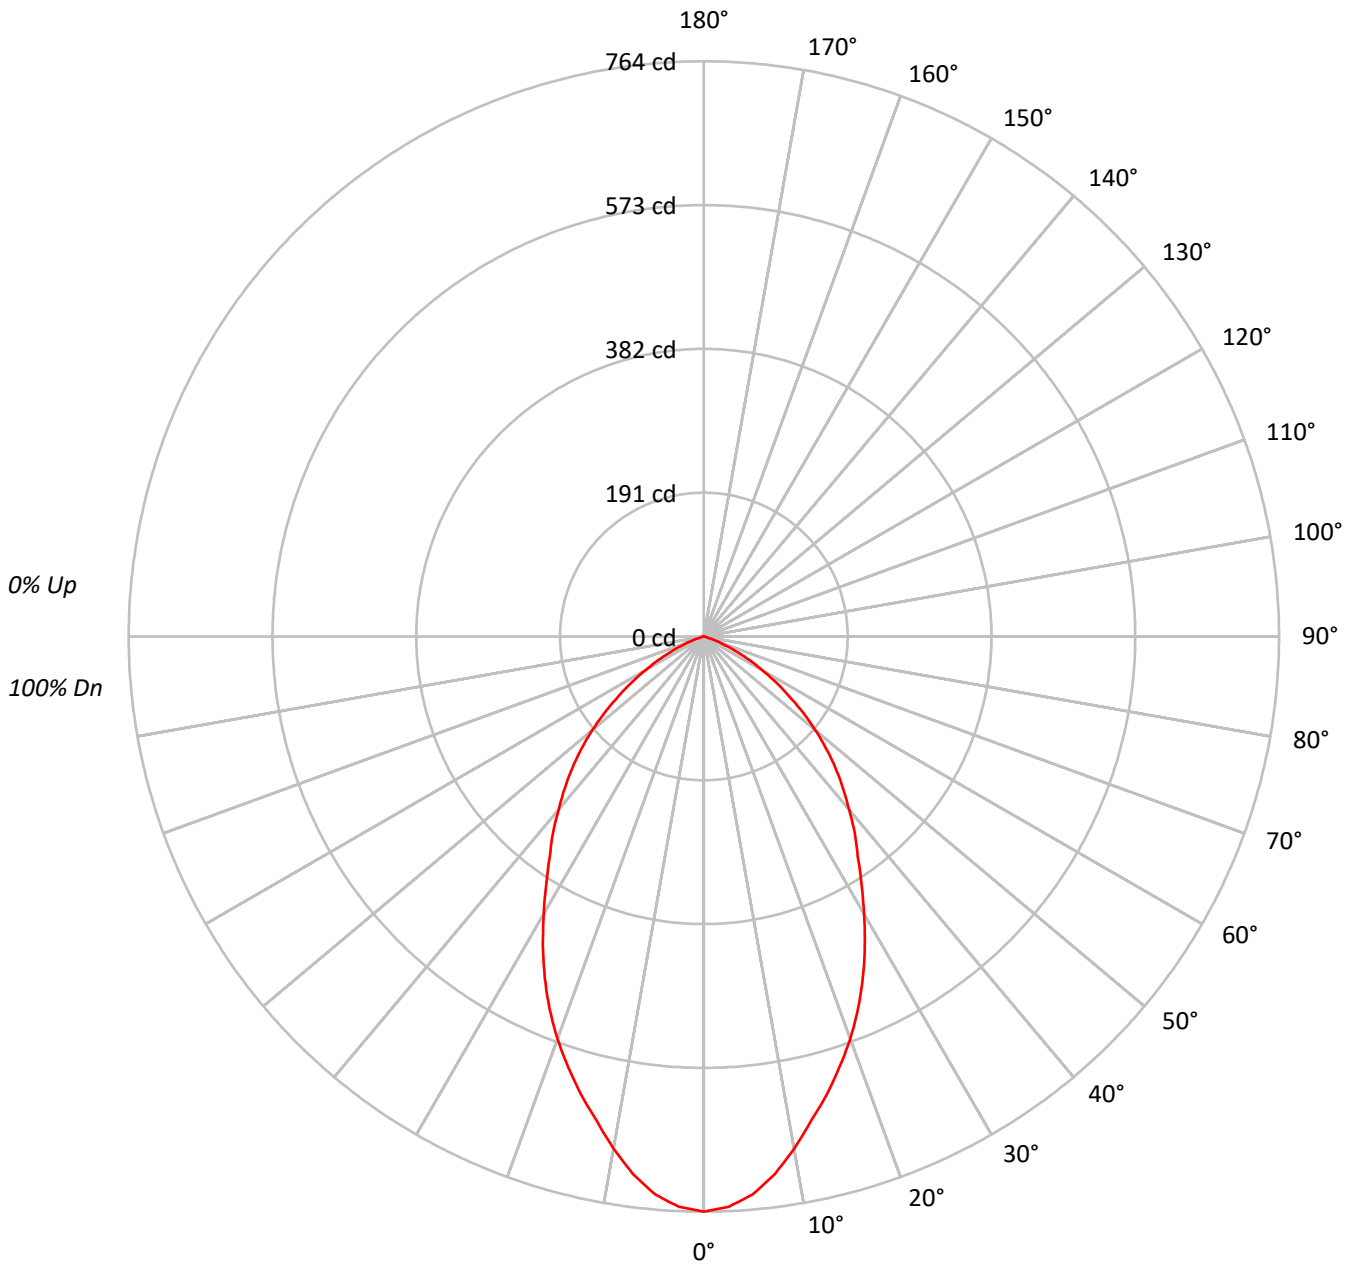



TEST NUMBER: P839205

CATALOG NUMBER: LD4C10D010 EU4109050 4LBSLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90			
2	104	98	93	88	102	96	91	87	93	89	85	90	86	84	87	84	82	80			
3	97	89	82	77	95	87	81	77	84	79	75	82	78	74	79	76	73	71			
4	90	81	73	68	88	79	73	68	77	71	67	75	70	66	73	69	65	63			
5	84	73	66	61	82	72	65	60	70	64	60	69	63	59	67	62	59	57			
6	79	67	60	54	77	66	59	54	65	58	54	63	58	53	62	57	53	51			
7	74	62	54	49	72	61	54	49	60	53	49	58	53	48	57	52	48	46			
8	69	57	50	45	68	57	50	45	55	49	45	54	49	44	53	48	44	42			
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	44	41	39			
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	46	41	37	36			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	93860
5°	91740
10°	86151
15°	80153
20°	74338
25°	67763
30°	60333
35°	53467
40°	48064
45°	43018
50°	36906
55°	29687
60°	22114
65°	14128
70°	6789
75°	1139
80°	849
85°	0



TEST NUMBER: P839205

CATALOG NUMBER: LD4C10D010 EU4109050 4LBSLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	69.3	6.5
10°-20°	176.7	16.5
20°-30°	228.9	21.4
30°-40°	224.3	21.0
40°-50°	190.1	17.8
50°-60°	124.6	11.6
60°-70°	50.1	4.7
70°-80°	5.7	0.5
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	474.9	44.4
0°-40°	699.2	65.3
0°-60°	1014.0	94.8
0°-90°	1070.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1070.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	764	
5°	744	69
15°	630	177
25°	500	229
35°	356	224
45°	248	190
55°	139	125
65°	49	50
75°	2	6
85°	0	0
90°	0	



TEST NUMBER: P839205

CATALOG NUMBER: LD4C10D010 EU4109050 4LBSLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	764.0
2.5°	758.1
5°	743.9
7.5°	720.2
10°	690.6
12.5°	658.6
15°	630.2
17.5°	599.4
20°	568.6
22.5°	535.4
25°	499.9
27.5°	463.1
30°	425.3
32.5°	389.7
35°	356.5
37.5°	329.3
40°	299.7
42.5°	273.6
45°	247.6
47.5°	220.3
50°	193.1
52.5°	165.8
55°	138.6
57.5°	113.7
60°	90.0
62.5°	68.7
65°	48.6
67.5°	32.0
70°	18.9
72.5°	8.3
75°	2.4
77.5°	1.2
80°	1.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)