

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839265

Luminaire Tested: **LD4C30D010 EU4309050 4LBSLI**

Issue Date: 2/9/2022



Test Information

Test Method: LM-79-08
Report Number: P839265
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208407)
Test Lab: INNOVATION CENTER
Issue Date: 2/9/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C30D010 EU4309050 4LBSLI
Description: 4 INCH 3000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS
AND 4LBS TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 3119.0 lumens
Efficiency: N/A
Efficacy: 98.7 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 31.6
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P839265

CATALOG NUMBER: LD4C30D010 EU4309050 4LBSLI

Luminous Intensity Polar Plot

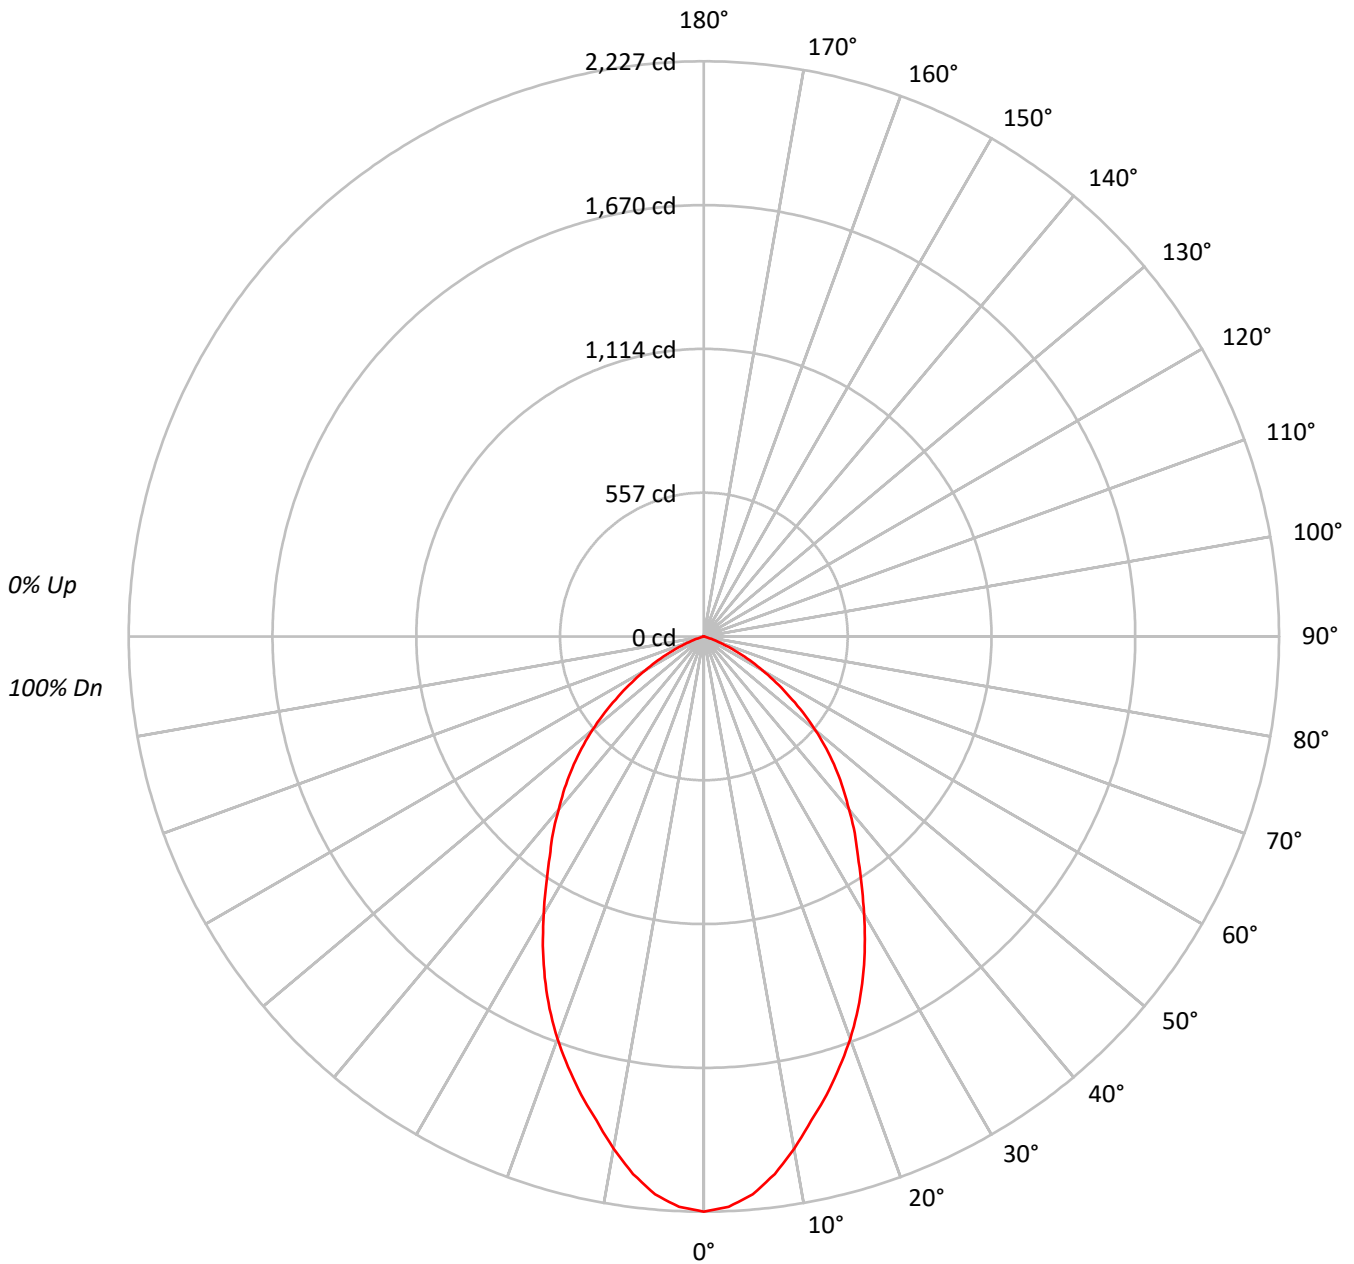



TEST NUMBER: P839265

CATALOG NUMBER: LD4C30D010 EU4309050 4LBSLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|---|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | 0 | | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | | |
| 1 | 112 | 108 | 105 | 102 | 109 | 106 | 103 | 101 | 102 | 100 | 98 | 98 | 96 | 95 | 95 | 93 | 92 | 90 | | | |
| 2 | 104 | 98 | 93 | 88 | 102 | 96 | 91 | 87 | 93 | 89 | 85 | 90 | 86 | 84 | 87 | 84 | 82 | 80 | | | |
| 3 | 97 | 89 | 82 | 77 | 95 | 87 | 81 | 77 | 84 | 79 | 75 | 82 | 78 | 74 | 79 | 76 | 73 | 71 | | | |
| 4 | 90 | 81 | 73 | 68 | 88 | 79 | 73 | 68 | 77 | 71 | 67 | 75 | 70 | 66 | 73 | 69 | 65 | 63 | | | |
| 5 | 84 | 73 | 66 | 61 | 82 | 72 | 65 | 60 | 70 | 64 | 60 | 69 | 63 | 59 | 67 | 62 | 59 | 57 | | | |
| 6 | 79 | 67 | 60 | 54 | 77 | 66 | 59 | 54 | 65 | 58 | 54 | 63 | 58 | 53 | 62 | 57 | 53 | 51 | | | |
| 7 | 74 | 62 | 54 | 49 | 72 | 61 | 54 | 49 | 60 | 53 | 49 | 58 | 53 | 48 | 57 | 52 | 48 | 46 | | | |
| 8 | 69 | 57 | 50 | 45 | 68 | 57 | 50 | 45 | 55 | 49 | 45 | 54 | 49 | 44 | 53 | 48 | 44 | 42 | | | |
| 9 | 65 | 53 | 46 | 41 | 64 | 53 | 46 | 41 | 52 | 45 | 41 | 51 | 45 | 41 | 50 | 44 | 41 | 39 | | | |
| 10 | 61 | 50 | 43 | 38 | 60 | 49 | 42 | 38 | 48 | 42 | 38 | 47 | 42 | 38 | 46 | 41 | 37 | 36 | | | |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|--------|
| | 0° |
| 0° | 273607 |
| 5° | 267401 |
| 10° | 251119 |
| 15° | 233630 |
| 20° | 216685 |
| 25° | 197515 |
| 30° | 175848 |
| 35° | 155870 |
| 40° | 140087 |
| 45° | 125389 |
| 50° | 107566 |
| 55° | 86532 |
| 60° | 64474 |
| 65° | 41163 |
| 70° | 19828 |
| 75° | 3275 |
| 80° | 2405 |
| 85° | 0 |



TEST NUMBER: P839265

CATALOG NUMBER: LD4C30D010 EU4309050 4LBSLI

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 201.9 | 6.5 |
| 10°-20° | 515.0 | 16.5 |
| 20°-30° | 667.4 | 21.4 |
| 30°-40° | 653.9 | 21.0 |
| 40°-50° | 554.3 | 17.8 |
| 50°-60° | 363.3 | 11.6 |
| 60°-70° | 146.0 | 4.7 |
| 70°-80° | 16.7 | 0.5 |
| 80°-90° | 0.5 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 1384.3 | 44.4 |
| 0°-40° | 2038.2 | 65.3 |
| 0°-60° | 2955.8 | 94.8 |
| 0°-90° | 3119.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 3119.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|------|------|
| 0° | 2227 | |
| 5° | 2168 | 202 |
| 15° | 1837 | 515 |
| 25° | 1457 | 667 |
| 35° | 1039 | 654 |
| 45° | 722 | 554 |
| 55° | 404 | 363 |
| 65° | 142 | 146 |
| 75° | 7 | 17 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P839265

CATALOG NUMBER: LD4C30D010 EU4309050 4LBSLI

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|--------|
| 0° | 2227.1 |
| 2.5° | 2209.8 |
| 5° | 2168.3 |
| 7.5° | 2099.3 |
| 10° | 2013.0 |
| 12.5° | 1919.7 |
| 15° | 1836.9 |
| 17.5° | 1747.2 |
| 20° | 1657.4 |
| 22.5° | 1560.7 |
| 25° | 1457.1 |
| 27.5° | 1350.0 |
| 30° | 1239.6 |
| 32.5° | 1136.0 |
| 35° | 1039.3 |
| 37.5° | 959.9 |
| 40° | 873.5 |
| 42.5° | 797.6 |
| 45° | 721.7 |
| 47.5° | 642.2 |
| 50° | 562.8 |
| 52.5° | 483.4 |
| 55° | 404.0 |
| 57.5° | 331.5 |
| 60° | 262.4 |
| 62.5° | 200.2 |
| 65° | 141.6 |
| 67.5° | 93.2 |
| 70° | 55.2 |
| 72.5° | 24.1 |
| 75° | 6.9 |
| 77.5° | 3.4 |
| 80° | 3.4 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)