

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839385

Luminaire Tested: **LD4C70D010 EU4709050 4LBSLI**

Issue Date: 2/9/2022



**Test Information**


Test Method: LM-79-08  
Report Number: P839385  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208407)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/9/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD4C70D010 EU4709050 4LBSLI  
Description: 4 INCH 7000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS  
AND 4LBS TRIM WITH LI FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 7439.0 lumens  
Efficiency: N/A  
Efficacy: 95.4 lumens/watt  
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 78  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P839385  
CATALOG NUMBER: LD4C70D010 EU4709050 4LBSLI

### Luminous Intensity Polar Plot

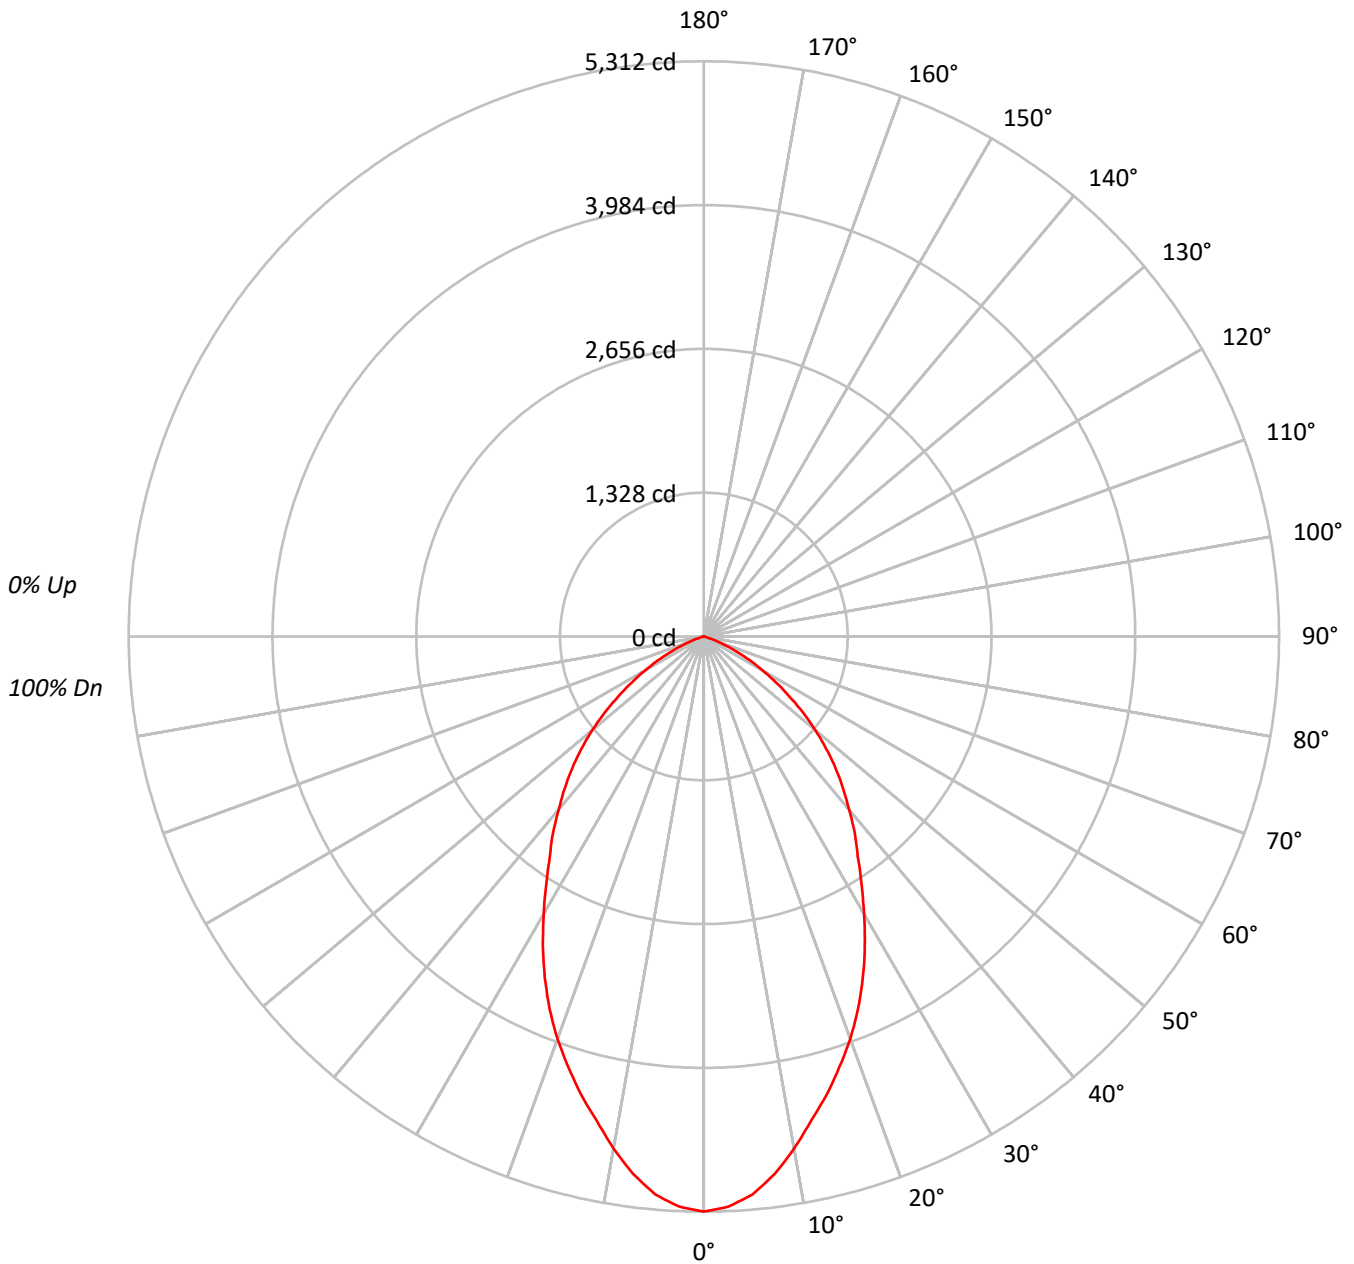



TEST NUMBER: P839385

CATALOG NUMBER: LD4C70D010 EU4709050 4LBSLI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90			
2	104	98	93	88	102	96	91	87	93	89	85	90	86	84	87	84	82	80			
3	97	89	82	77	95	87	81	77	84	79	75	82	78	74	79	76	73	71			
4	90	81	73	68	88	79	73	68	77	71	67	75	70	66	73	69	65	63			
5	84	73	66	61	82	72	65	60	70	64	60	69	63	59	67	62	59	57			
6	79	67	60	54	77	66	59	54	65	58	54	63	58	53	62	57	53	51			
7	74	62	54	49	72	61	54	49	60	53	49	58	53	48	57	52	48	46			
8	69	57	50	45	68	57	50	45	55	49	45	54	49	44	53	48	44	42			
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	44	41	39			
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	46	41	37	36			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	652561
5°	637776
10°	598931
15°	557220
20°	516794
25°	471090
30°	419406
35°	371747
40°	334123
45°	299043
50°	256549
55°	206371
60°	153763
65°	98168
70°	47307
75°	7832
80°	5801
85°	0



TEST NUMBER: P839385

CATALOG NUMBER: LD4C70D010 EU4709050 4LBSLI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	481.6	6.5
10°-20°	1228.3	16.5
20°-30°	1591.7	21.4
30°-40°	1559.6	21.0
40°-50°	1321.9	17.8
50°-60°	866.6	11.6
60°-70°	348.3	4.7
70°-80°	39.8	0.5
80°-90°	1.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3301.7	44.4
0°-40°	4861.3	65.3
0°-60°	7049.7	94.8
0°-90°	7439.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7439.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	5312	
5°	5172	482
15°	4381	1228
25°	3475	1592
35°	2479	1560
45°	1721	1322
55°	964	867
65°	338	348
75°	16	40
85°	0	1
90°	0	



TEST NUMBER: P839385

CATALOG NUMBER: LD4C70D010 EU4709050 4LBSLI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	5311.7
2.5°	5270.5
5°	5171.6
7.5°	5006.9
10°	4801.1
12.5°	4578.7
15°	4381.1
17.5°	4167.1
20°	3952.9
22.5°	3722.4
25°	3475.3
27.5°	3219.9
30°	2956.5
32.5°	2709.4
35°	2478.7
37.5°	2289.4
40°	2083.4
42.5°	1902.3
45°	1721.2
47.5°	1531.7
50°	1342.3
52.5°	1153.0
55°	963.5
57.5°	790.6
60°	625.8
62.5°	477.6
65°	337.7
67.5°	222.4
70°	131.7
72.5°	57.6
75°	16.5
77.5°	8.2
80°	8.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)