

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839589

Luminaire Tested: **LDS4C05D010 EU4059050 4LBPSMMS**

Issue Date: 8/24/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P839589  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-18)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/24/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDS4C05D010 EU4059050 4LBPSMMS  
Description: 4 INCH 500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS AND 4LBPS TRIM WITH MMS FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 544.0 lumens  
Efficiency: N/A  
Efficacy: 75.6 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.25  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.2  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P839589

CATALOG NUMBER: LDS4C05D010 EU4059050 4LBPSMMS

### Luminous Intensity Polar Plot

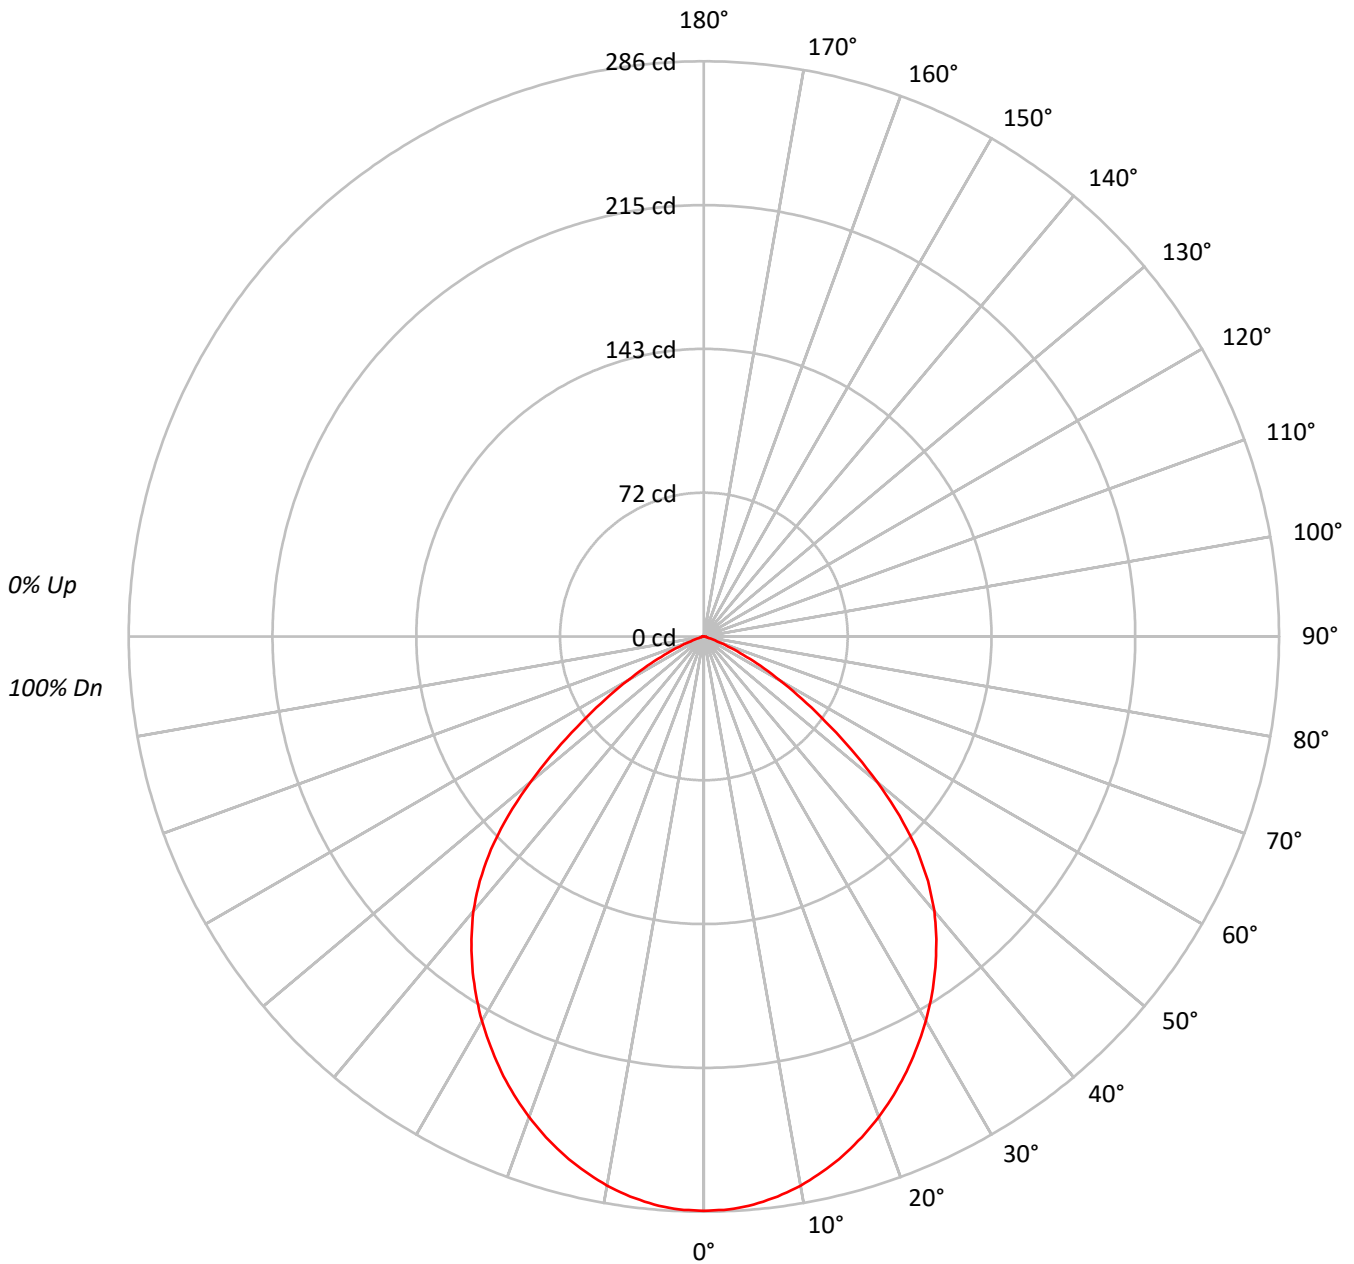



TEST NUMBER: P839589

CATALOG NUMBER: LDS4C05D010 EU4059050 4LBPSMMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

|     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|-----|
| RF  | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |     |     | 20  |     |    |    |     |
| RC  | 80  |     |     |     | 70  |     |     |     | 50  |     |     |     | 30  |     |     |     | 10  |     |    | 0  |     |
| RW  | 70  | 50  | 30  | 10  | 70  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30  | 10  | 50  | 30 | 10 | 0   |
| RCR |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |     |    |    |     |
| 0   | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 |    |    | 100 |
| 1   | 112 | 108 | 105 | 102 | 109 | 106 | 103 | 100 | 102 | 99  | 97  | 98  | 96  | 94  | 94  | 93  | 92  | 90  |    |    | 90  |
| 2   | 104 | 97  | 92  | 88  | 101 | 96  | 91  | 87  | 92  | 88  | 85  | 89  | 86  | 83  | 86  | 83  | 81  | 79  |    |    | 79  |
| 3   | 96  | 88  | 81  | 76  | 94  | 86  | 80  | 75  | 83  | 78  | 74  | 81  | 76  | 73  | 78  | 75  | 72  | 70  |    |    | 70  |
| 4   | 89  | 79  | 72  | 66  | 87  | 78  | 71  | 66  | 76  | 70  | 65  | 73  | 68  | 64  | 71  | 67  | 63  | 62  |    |    | 62  |
| 5   | 83  | 72  | 64  | 59  | 81  | 71  | 64  | 58  | 69  | 63  | 58  | 67  | 61  | 57  | 65  | 60  | 57  | 55  |    |    | 55  |
| 6   | 77  | 66  | 58  | 52  | 75  | 65  | 57  | 52  | 63  | 56  | 52  | 61  | 56  | 51  | 60  | 55  | 51  | 49  |    |    | 49  |
| 7   | 72  | 60  | 52  | 47  | 70  | 59  | 52  | 47  | 58  | 51  | 46  | 56  | 50  | 46  | 55  | 50  | 46  | 44  |    |    | 44  |
| 8   | 67  | 55  | 47  | 42  | 66  | 54  | 47  | 42  | 53  | 47  | 42  | 52  | 46  | 42  | 51  | 46  | 41  | 40  |    |    | 40  |
| 9   | 63  | 51  | 43  | 38  | 62  | 50  | 43  | 38  | 49  | 43  | 38  | 48  | 42  | 38  | 47  | 42  | 38  | 36  |    |    | 36  |
| 10  | 59  | 47  | 40  | 35  | 58  | 47  | 40  | 35  | 46  | 39  | 35  | 45  | 39  | 35  | 44  | 39  | 35  | 33  |    |    | 33  |

**AVERAGE LUMINANCE (cd/sqm):**

|     |       |
|-----|-------|
|     | 0°    |
| 0°  | 35087 |
| 5°  | 34974 |
| 10° | 34593 |
| 15° | 33997 |
| 20° | 33234 |
| 25° | 32343 |
| 30° | 31322 |
| 35° | 30115 |
| 40° | 28595 |
| 45° | 26009 |
| 50° | 21463 |
| 55° | 15807 |
| 60° | 10737 |
| 65° | 6279  |
| 70° | 2478  |
| 75° | 570   |
| 80° | 707   |
| 85° | 1269  |



TEST NUMBER: P839589

CATALOG NUMBER: LDS4C05D010 EU4059050 4LBPSMMS

**ZONAL LUMENS:**

| Zone      | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10°    | 26.9   | 4.9       |
| 10°-20°   | 75.3   | 13.8      |
| 20°-30°   | 109.8  | 20.2      |
| 30°-40°   | 125.3  | 23.0      |
| 40°-50°   | 113.9  | 20.9      |
| 50°-60°   | 67.2   | 12.4      |
| 60°-70°   | 22.5   | 4.1       |
| 70°-80°   | 2.3    | 0.4       |
| 80°-90°   | 0.8    | 0.2       |
| 90°-100°  | 0.0    | 0.0       |
| 100°-110° | 0.0    | 0.0       |
| 110°-120° | 0.0    | 0.0       |
| 120°-130° | 0.0    | 0.0       |
| 130°-140° | 0.0    | 0.0       |
| 140°-150° | 0.0    | 0.0       |
| 150°-160° | 0.0    | 0.0       |
| 160°-170° | 0.0    | 0.0       |
| 170°-180° | 0.0    | 0.0       |
| 0°-30°    | 211.9  | 39.0      |
| 0°-40°    | 337.2  | 62.0      |
| 0°-60°    | 518.3  | 95.3      |
| 0°-90°    | 544.0  | 100.0     |
| 90°-120°  | 0.0    | 0.0       |
| 90°-150°  | 0.0    | 0.0       |
| 90°-180°  | 0.0    | 0.0       |
| 0°-180°   | 544.0  | 100.0     |

**CANDELA DISTRIBUTION:**

|     | 0°  | Flux |
|-----|-----|------|
| 0°  | 286 |      |
| 5°  | 284 | 27   |
| 15° | 267 | 75   |
| 25° | 239 | 110  |
| 35° | 201 | 125  |
| 45° | 150 | 114  |
| 55° | 74  | 67   |
| 65° | 22  | 23   |
| 75° | 1   | 2    |
| 85° | 1   | 1    |
| 90° | 0   |      |



TEST NUMBER: P839589

CATALOG NUMBER: LDS4C05D010 EU4059050 4LBPSMMS

**CANDELA DISTRIBUTION (FULL):**

|       | 0°    |
|-------|-------|
| 0°    | 285.6 |
| 2.5°  | 285.2 |
| 5°    | 283.6 |
| 7.5°  | 280.9 |
| 10°   | 277.3 |
| 12.5° | 272.6 |
| 15°   | 267.3 |
| 17.5° | 261.1 |
| 20°   | 254.2 |
| 22.5° | 246.7 |
| 25°   | 238.6 |
| 27.5° | 229.8 |
| 30°   | 220.8 |
| 32.5° | 211.0 |
| 35°   | 200.8 |
| 37.5° | 189.8 |
| 40°   | 178.3 |
| 42.5° | 164.9 |
| 45°   | 149.7 |
| 47.5° | 132.0 |
| 50°   | 112.3 |
| 52.5° | 92.6  |
| 55°   | 73.8  |
| 57.5° | 57.8  |
| 60°   | 43.7  |
| 62.5° | 31.6  |
| 65°   | 21.6  |
| 67.5° | 13.2  |
| 70°   | 6.9   |
| 72.5° | 2.6   |
| 75°   | 1.2   |
| 77.5° | 1.2   |
| 80°   | 1.0   |
| 82.5° | 0.9   |
| 85°   | 0.9   |
| 87.5° | 0.7   |
| 90°   | 0.0   |



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)