

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839631

Luminaire Tested: **LDS4C08D010 EU4089040 4LBSGPH**

Issue Date: 8/24/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P839631  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-18)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/24/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDS4C08D010 EU4089040 4LBSGPH  
Description: 4 INCH 800 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, 90CRI LEDS AND 4LBS TRIM WITH GPH FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 581.0 lumens  
Efficiency: N/A  
Efficacy: 58.7 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.25  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9.9  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P839631

CATALOG NUMBER: LDS4C08D010 EU4089040 4LBSGPH

### Luminous Intensity Polar Plot

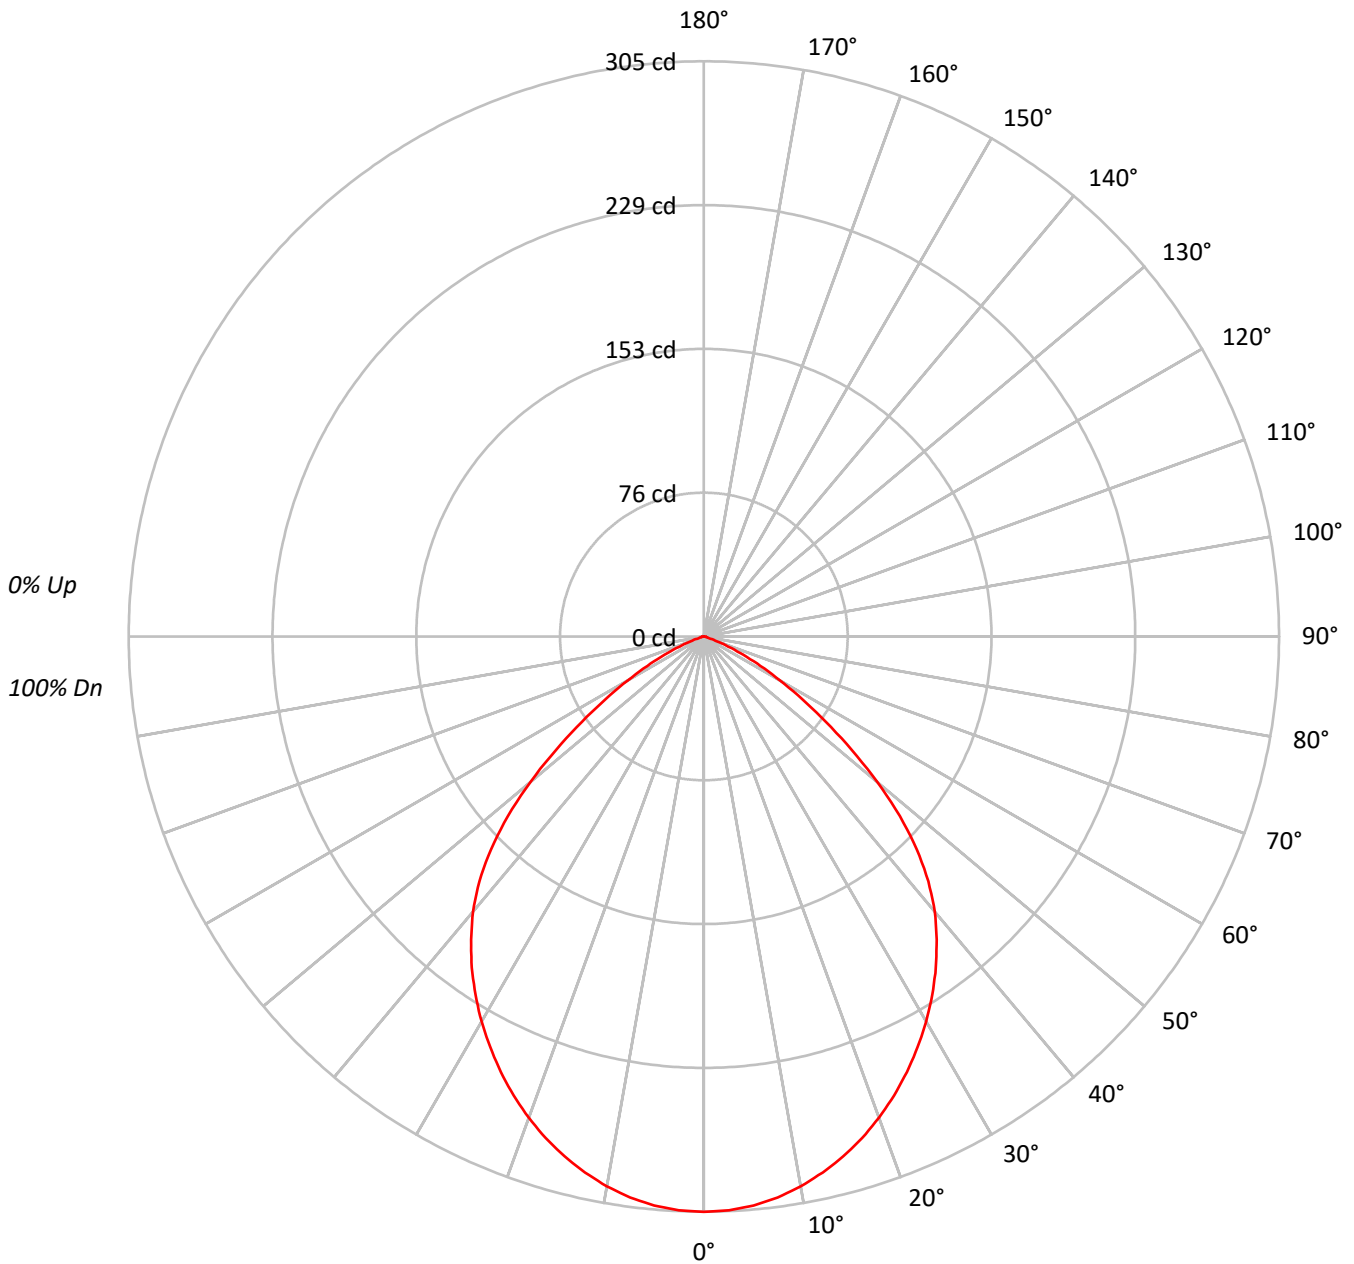



TEST NUMBER: P839631

CATALOG NUMBER: LDS4C08D010 EU4089040 4LBSGPH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	92	90																											
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79																											
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	72	70																											
4	89	79	72	66	87	78	71	66	76	70	65	73	68	64	71	67	63	62																											
5	83	72	64	59	81	71	64	58	69	63	58	67	61	57	65	60	57	55																											
6	77	65	58	52	75	65	57	52	63	56	52	61	56	51	60	55	51	49																											
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44																											
8	67	55	47	42	66	54	47	42	53	47	42	52	46	42	51	46	41	40																											
9	63	51	43	38	62	50	43	38	49	43	38	48	42	38	47	42	38	36																											
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35	44	39	35	33																											

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	37483
5°	37354
10°	36938
15°	36299
20°	35495
25°	34539
30°	33450
35°	32170
40°	30551
45°	27764
50°	22935
55°	16878
60°	11450
65°	6715
70°	2658
75°	617
80°	778
85°	1269



TEST NUMBER: P839631

CATALOG NUMBER: LDS4C08D010 EU4089040 4LBSGPH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	28.7	4.9
10°-20°	80.4	13.8
20°-30°	117.2	20.2
30°-40°	133.8	23.0
40°-50°	121.7	20.9
50°-60°	71.7	12.3
60°-70°	24.1	4.1
70°-80°	2.5	0.4
80°-90°	0.9	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	226.3	39.0
0°-40°	360.1	62.0
0°-60°	553.5	95.3
0°-90°	581.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	581.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	305	
5°	303	29
15°	285	80
25°	255	117
35°	214	134
45°	160	122
55°	79	72
65°	23	24
75°	1	3
85°	1	1
90°	0	



TEST NUMBER: P839631

CATALOG NUMBER: LDS4C08D010 EU4089040 4LBSGPH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	305.1
2.5°	304.6
5°	302.9
7.5°	300.0
10°	296.1
12.5°	291.1
15°	285.4
17.5°	278.9
20°	271.5
22.5°	263.5
25°	254.8
27.5°	245.4
30°	235.8
32.5°	225.3
35°	214.5
37.5°	202.7
40°	190.5
42.5°	176.2
45°	159.8
47.5°	141.0
50°	120.0
52.5°	98.9
55°	78.8
57.5°	61.7
60°	46.6
62.5°	33.8
65°	23.1
67.5°	14.1
70°	7.4
72.5°	2.8
75°	1.3
77.5°	1.3
80°	1.1
82.5°	0.9
85°	0.9
87.5°	0.8
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)