

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839704

Luminaire Tested: **LDS4C10D010 EU4109027 4LBSWH**

Issue Date: 8/24/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P839704  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205729)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/24/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDS4C10D010 EU4109027 4LBSWH  
Description: 4 INCH 1000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2700K, 90CRI LEDS  
AND 4LBS TRIM WITH WH FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 886.0 lumens  
Efficiency: N/A  
Efficacy: 90.4 lumens/watt  
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9.8  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P839704

CATALOG NUMBER: LDS4C10D010 EU4109027 4LBSWH

### Luminous Intensity Polar Plot

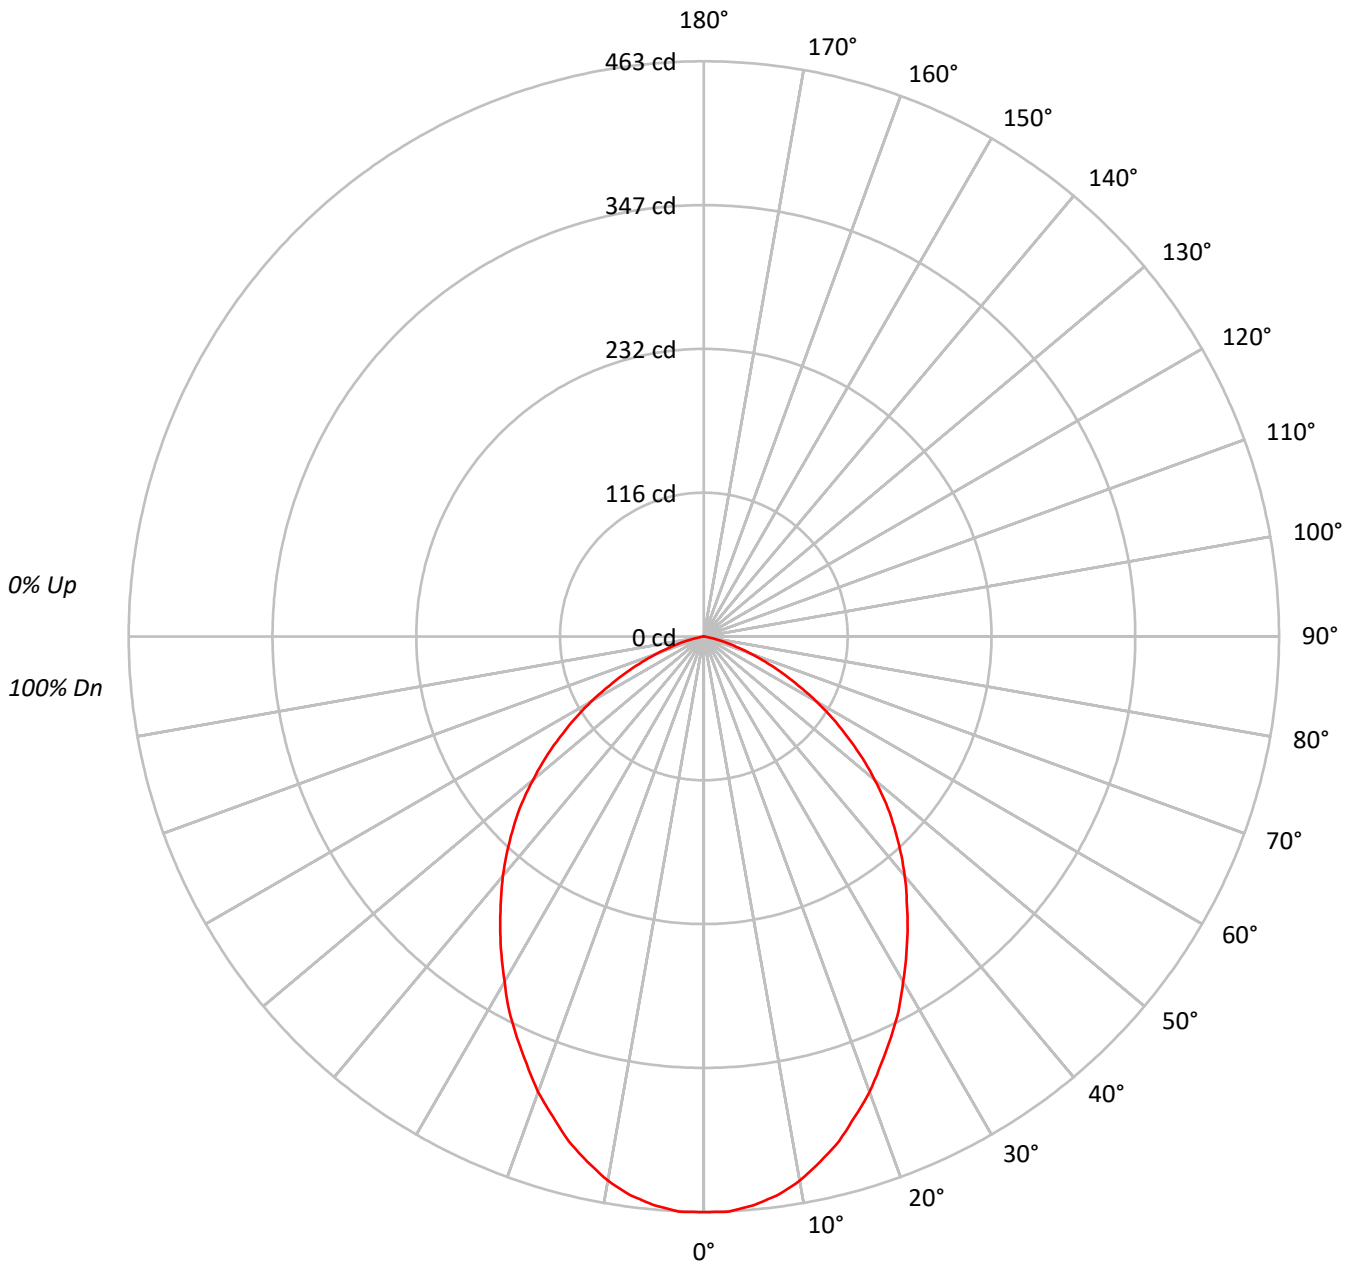



TEST NUMBER: P839704

CATALOG NUMBER: LDS4C10D010 EU4109027 4LBSWH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88																			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77																			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67																			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58																			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51																			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46																			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41																			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37																			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34																			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	56930
5°	56667
10°	55488
15°	53482
20°	51014
25°	48271
30°	45523
35°	42863
40°	40366
45°	37632
50°	34307
55°	30308
60°	25652
65°	20145
70°	14368
75°	7880
80°	1415
85°	0



TEST NUMBER: P839704

CATALOG NUMBER: LDS4C10D010 EU4109027 4LBSWH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	43.4	4.9
10°-20°	118.0	13.3
20°-30°	163.8	18.5
30°-40°	178.8	20.2
40°-50°	166.8	18.8
50°-60°	126.6	14.3
60°-70°	69.3	7.8
70°-80°	19.1	2.2
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	325.2	36.7
0°-40°	504.0	56.9
0°-60°	797.4	90.0
0°-90°	886.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	886.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	463	
5°	460	43
15°	420	118
25°	356	164
35°	286	179
45°	217	167
55°	142	127
65°	69	69
75°	17	19
85°	0	0
90°	0	



TEST NUMBER: P839704

CATALOG NUMBER: LDS4C10D010 EU4109027 4LBSWH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	463.4
2.5°	463.4
5°	459.5
7.5°	453.6
10°	444.8
12.5°	433.1
15°	420.5
17.5°	404.9
20°	390.2
22.5°	372.6
25°	356.1
27.5°	339.5
30°	320.9
32.5°	303.4
35°	285.8
37.5°	268.3
40°	251.7
42.5°	234.1
45°	216.6
47.5°	199.0
50°	179.5
52.5°	161.0
55°	141.5
57.5°	122.9
60°	104.4
62.5°	85.9
65°	69.3
67.5°	53.6
70°	40.0
72.5°	27.3
75°	16.6
77.5°	7.8
80°	2.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)