

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839727

Luminaire Tested: **LDS4C10D010 EU4109040 4LBCSMMS**

Issue Date: 8/24/2022



Test Information

Test Method: LM-79-08
Report Number: P839727
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-18)
Test Lab: INNOVATION CENTER
Issue Date: 8/24/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDS4C10D010 EU4109040 4LBCSMMS
Description: 4 INCH 1000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, 90CRI LEDS
AND 4LBCS TRIM WITH MMS FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 723.1 lumens
Efficiency: N/A
Efficacy: 73.8 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.25
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.8
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P839727

CATALOG NUMBER: LDS4C10D010 EU4109040 4LBCSMMS

Luminous Intensity Polar Plot

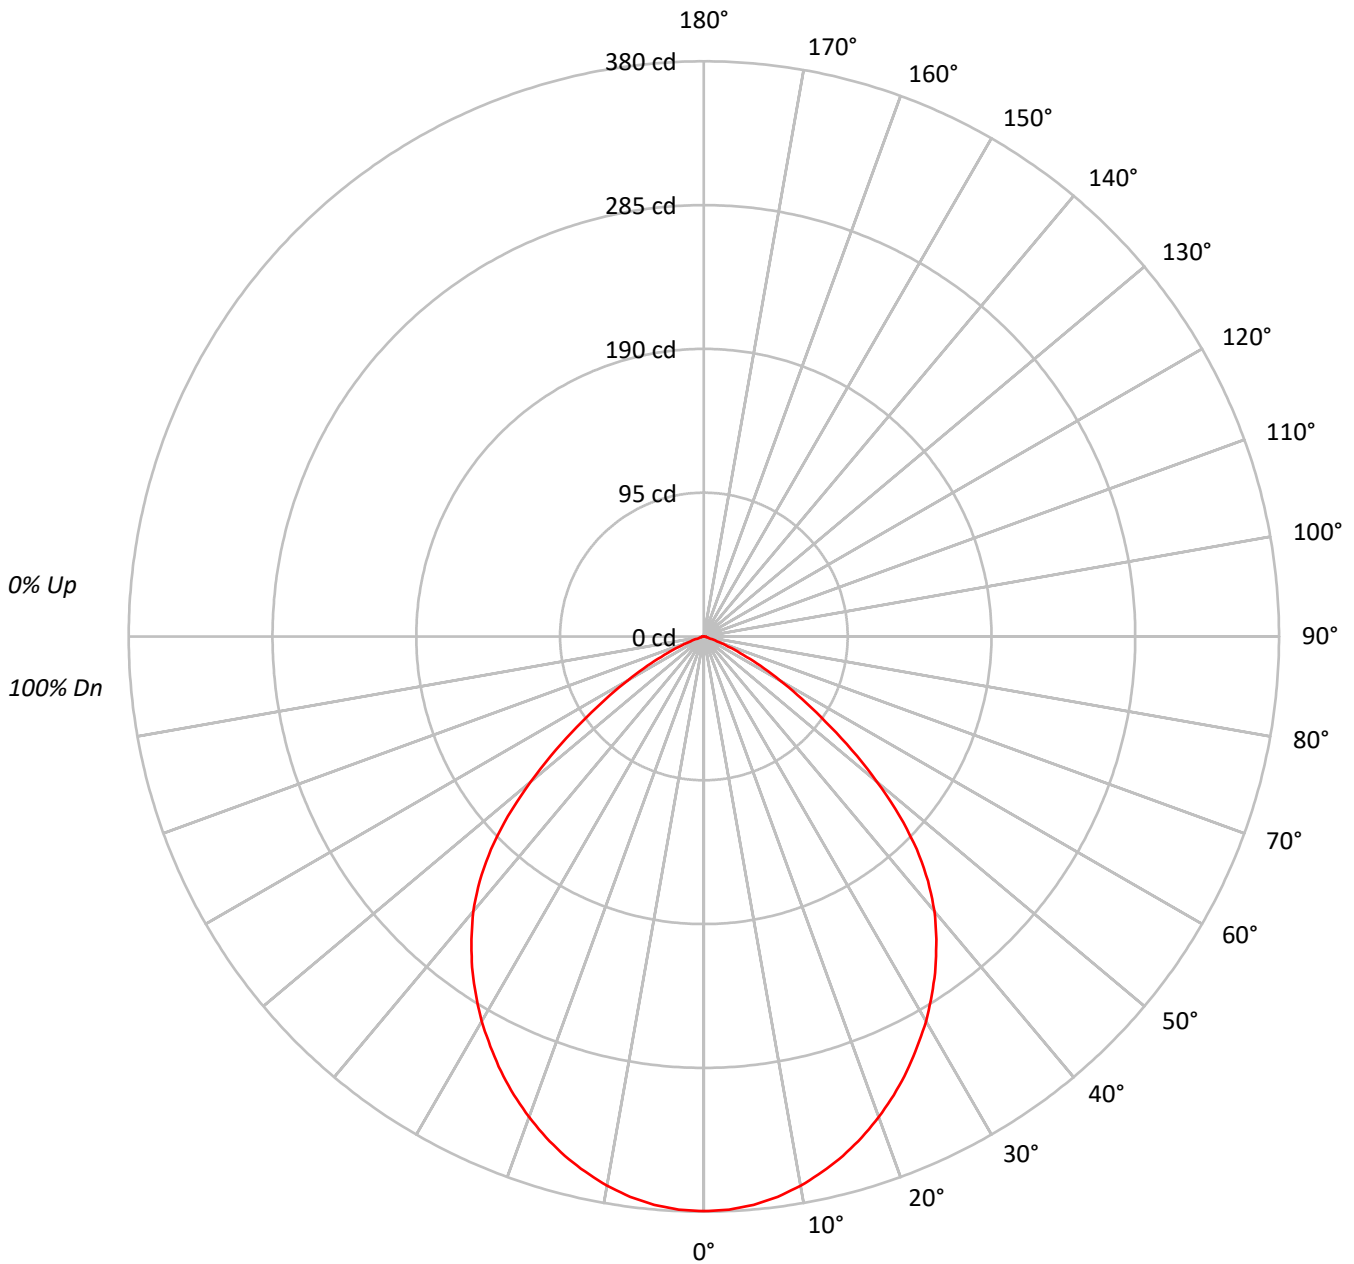



TEST NUMBER: P839727

CATALOG NUMBER: LDS4C10D010 EU4109040 4LBCSMMS

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	92	90			
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79			
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	72	70			
4	89	79	72	66	87	78	71	66	76	70	65	73	68	64	71	67	63	62			
5	83	72	64	59	81	71	64	58	69	63	58	67	61	57	65	60	57	55			
6	77	65	58	52	75	65	57	52	63	56	52	61	56	51	60	55	51	49			
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44			
8	67	55	47	42	66	54	47	42	53	47	42	52	46	42	51	46	41	40			
9	63	51	43	38	62	50	43	38	49	43	38	48	42	38	47	42	38	36			
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35	44	39	35	33			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	46635
5°	46480
10°	45970
15°	45177
20°	44163
25°	42984
30°	41636
35°	40029
40°	38009
45°	34557
50°	28535
55°	21012
60°	14251
65°	8343
70°	3305
75°	759
80°	990
85°	1692



TEST NUMBER: P839727

CATALOG NUMBER: LDS4C10D010 EU4109040 4LBCSMMS

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	35.7	4.9
10°-20°	100.0	13.8
20°-30°	145.9	20.2
30°-40°	166.5	23.0
40°-50°	151.4	20.9
50°-60°	89.3	12.4
60°-70°	29.9	4.1
70°-80°	3.1	0.4
80°-90°	1.1	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	281.6	38.9
0°-40°	448.2	62.0
0°-60°	688.9	95.3
0°-90°	723.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	723.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	380	
5°	377	36
15°	355	100
25°	317	146
35°	267	167
45°	199	151
55°	98	89
65°	29	30
75°	2	3
85°	1	1
90°	0	



TEST NUMBER: P839727

CATALOG NUMBER: LDS4C10D010 EU4109040 4LBCSMMS

CANDELA DISTRIBUTION (FULL):

	0°
0°	379.6
2.5°	379.0
5°	376.9
7.5°	373.4
10°	368.5
12.5°	362.2
15°	355.2
17.5°	347.0
20°	337.8
22.5°	327.9
25°	317.1
27.5°	305.4
30°	293.5
32.5°	280.4
35°	266.9
37.5°	252.2
40°	237.0
42.5°	219.2
45°	198.9
47.5°	175.5
50°	149.3
52.5°	123.1
55°	98.1
57.5°	76.8
60°	58.0
62.5°	42.0
65°	28.7
67.5°	17.6
70°	9.2
72.5°	3.5
75°	1.6
77.5°	1.6
80°	1.4
82.5°	1.2
85°	1.2
87.5°	1.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)