

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839745

Luminaire Tested: **LDS4C10D010 EU4109050 4LBSWMH**

Issue Date: 8/24/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P839745  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205729)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/24/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDS4C10D010 EU4109050 4LBSWMH  
Description: 4 INCH 1000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS  
AND 4LBS TRIM WITH WMH FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 911.0 lumens  
Efficiency: N/A  
Efficacy: 93.0 lumens/watt  
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9.8  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P839745

CATALOG NUMBER: LDS4C10D010 EU4109050 4LBSWMH

### Luminous Intensity Polar Plot

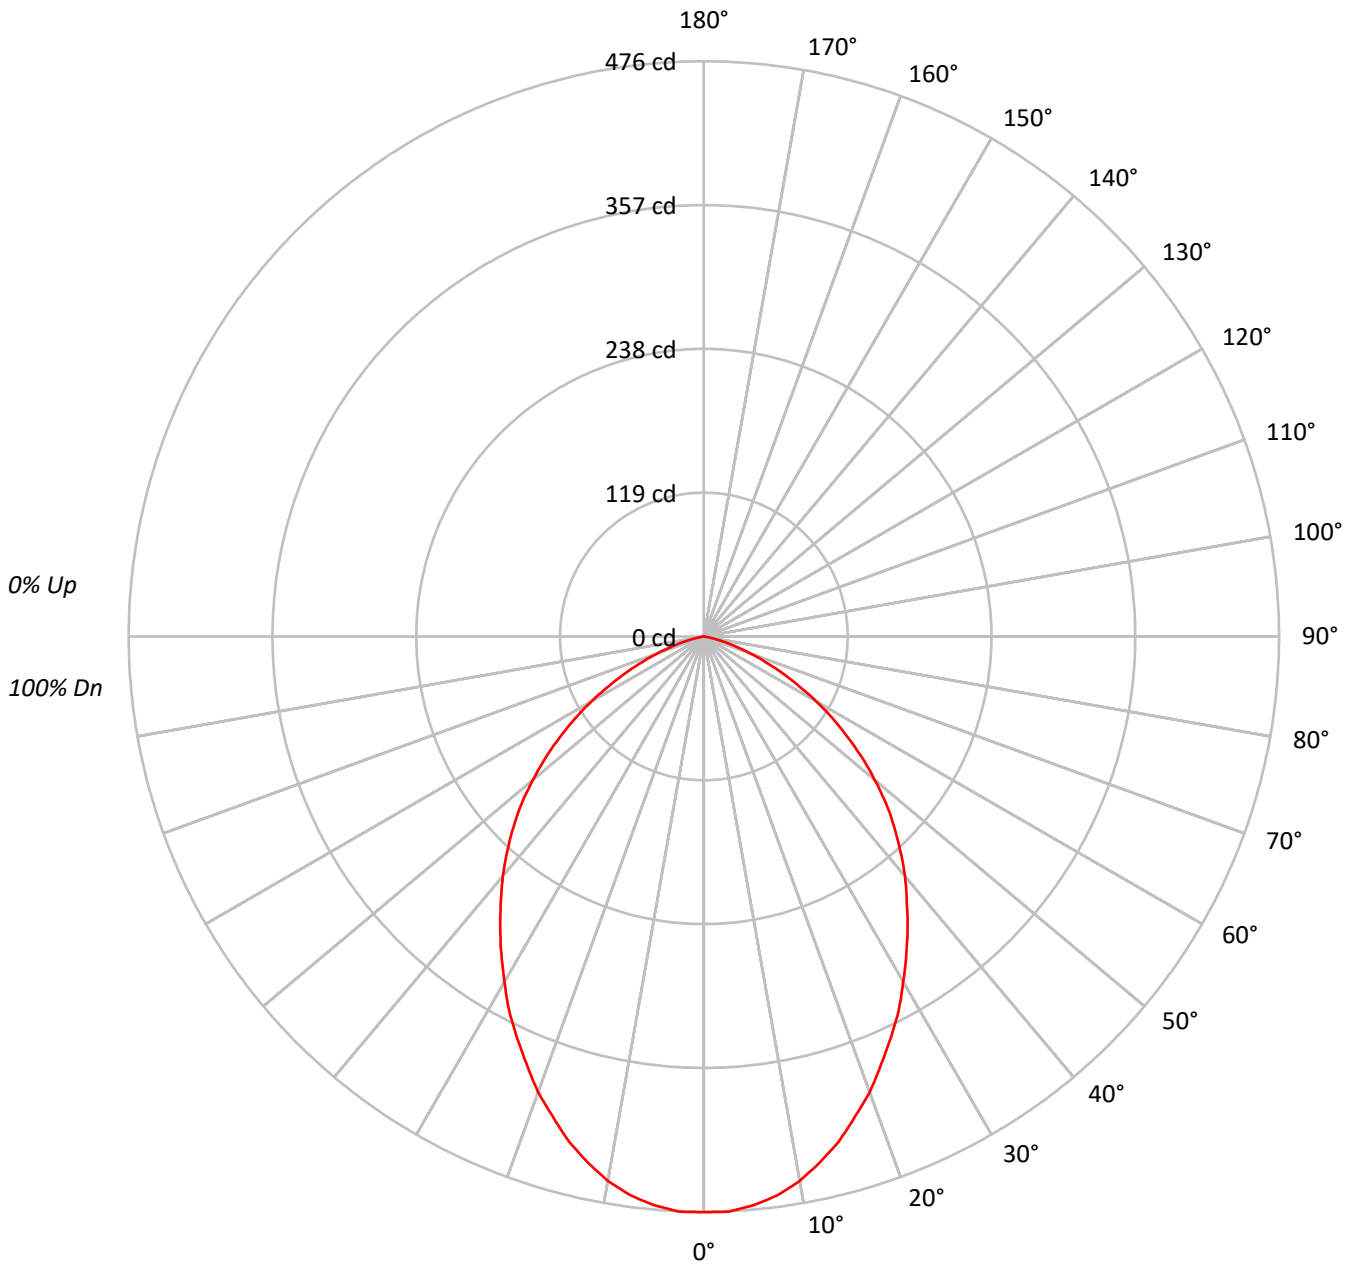



TEST NUMBER: P839745

CATALOG NUMBER: LDS4C10D010 EU4109050 4LBSWMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	58527
5°	58258
10°	57060
15°	54983
20°	52452
25°	49626
30°	46813
35°	44078
40°	41505
45°	38692
50°	35282
55°	31164
60°	26364
65°	20698
70°	14763
75°	8117
80°	1415
85°	0



TEST NUMBER: P839745

CATALOG NUMBER: LDS4C10D010 EU4109050 4LBSWMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	44.6	4.9
10°-20°	121.3	13.3
20°-30°	168.5	18.5
30°-40°	183.8	20.2
40°-50°	171.5	18.8
50°-60°	130.2	14.3
60°-70°	71.3	7.8
70°-80°	19.6	2.2
80°-90°	0.3	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	334.4	36.7
0°-40°	518.2	56.9
0°-60°	819.9	90.0
0°-90°	911.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	911.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	476	
5°	472	45
15°	432	121
25°	366	168
35°	294	184
45°	223	171
55°	146	130
65°	71	71
75°	17	20
85°	0	0
90°	0	



TEST NUMBER: P839745

CATALOG NUMBER: LDS4C10D010 EU4109050 4LBSWMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	476.4
2.5°	476.4
5°	472.4
7.5°	466.4
10°	457.4
12.5°	445.4
15°	432.3
17.5°	416.3
20°	401.2
22.5°	383.2
25°	366.1
27.5°	349.1
30°	330.0
32.5°	311.9
35°	293.9
37.5°	275.8
40°	258.8
42.5°	240.7
45°	222.7
47.5°	204.6
50°	184.6
52.5°	165.5
55°	145.5
57.5°	126.4
60°	107.3
62.5°	88.3
65°	71.2
67.5°	55.2
70°	41.1
72.5°	28.1
75°	17.1
77.5°	8.0
80°	2.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)