

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839746

Luminaire Tested: **LDS4C15D010 EU4159027 4LBCSMB**

Issue Date: 8/24/2022



Test Information

Test Method: LM-79-08
Report Number: P839746
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-18)
Test Lab: INNOVATION CENTER
Issue Date: 8/24/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDS4C15D010 EU4159027 4LBCSMB
Description: 4 INCH 1500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2700K, 90CRI LEDS
AND 4LBCS TRIM WITH MB FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1026.0 lumens
Efficiency: N/A
Efficacy: 64.9 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.25
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P839746

CATALOG NUMBER: LDS4C15D010 EU4159027 4LBCSMB

Luminous Intensity Polar Plot

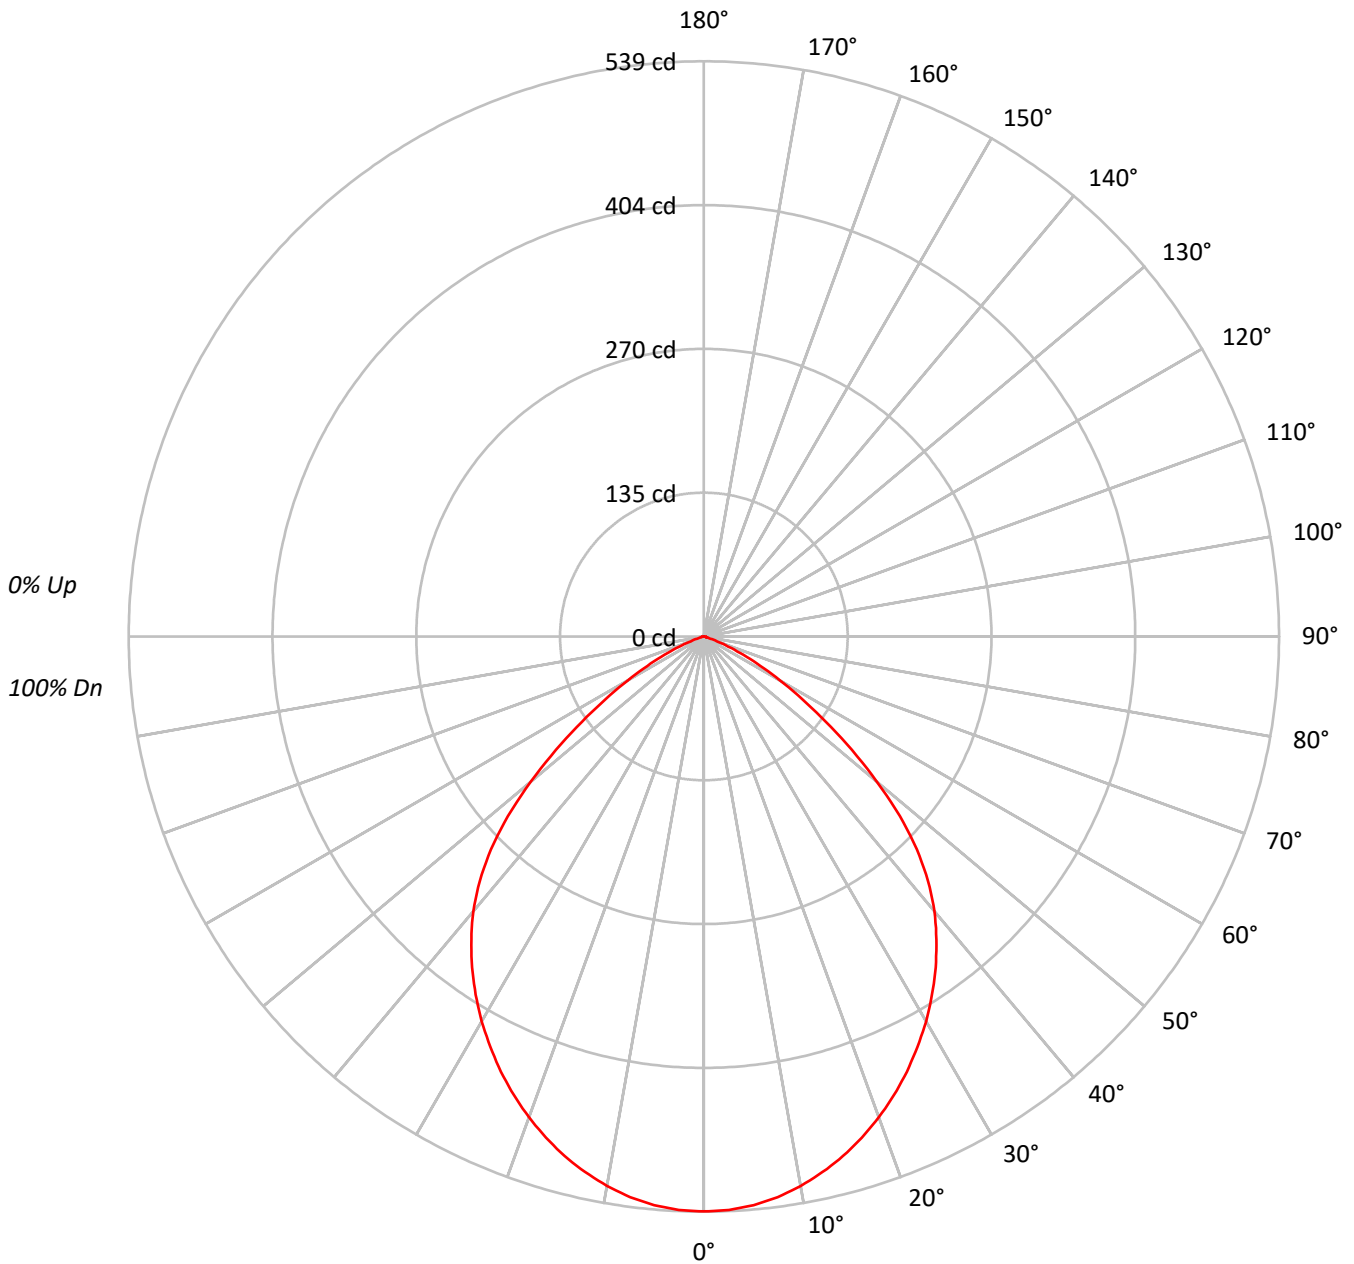



TEST NUMBER: P839746

CATALOG NUMBER: LDS4C15D010 EU4159027 4LBCSMB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	92	90			
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79			
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	72	70			
4	89	79	72	66	87	78	71	66	76	70	65	73	68	64	71	67	63	62			
5	83	72	64	59	81	71	64	58	69	63	58	67	61	57	65	60	57	55			
6	77	65	58	52	75	65	57	52	63	56	52	61	56	51	60	55	51	49			
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44			
8	67	55	47	42	66	54	47	42	53	47	42	52	46	42	51	46	41	40			
9	63	51	43	38	62	50	43	38	49	43	38	48	42	38	47	42	38	36			
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35	44	39	35	33			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	66181
5°	65965
10°	65231
15°	64115
20°	62676
25°	60999
30°	59084
35°	56796
40°	53934
45°	49047
50°	40481
55°	29815
60°	20222
65°	11860
70°	4670
75°	1044
80°	1344
85°	2396



TEST NUMBER: P839746

CATALOG NUMBER: LDS4C15D010 EU4159027 4LBCSMB

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	50.7	4.9
10°-20°	141.9	13.8
20°-30°	207.0	20.2
30°-40°	236.3	23.0
40°-50°	214.8	20.9
50°-60°	126.7	12.4
60°-70°	42.5	4.1
70°-80°	4.4	0.4
80°-90°	1.6	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	399.7	39.0
0°-40°	636.0	62.0
0°-60°	977.5	95.3
0°-90°	1026.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1026.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	539	
5°	535	51
15°	504	142
25°	450	207
35°	379	236
45°	282	215
55°	139	127
65°	41	43
75°	2	4
85°	2	2
90°	0	



TEST NUMBER: P839746

CATALOG NUMBER: LDS4C15D010 EU4159027 4LBCSMB

CANDELA DISTRIBUTION (FULL):

	0°
0°	538.7
2.5°	537.9
5°	534.9
7.5°	529.9
10°	522.9
12.5°	514.1
15°	504.1
17.5°	492.4
20°	479.4
22.5°	465.3
25°	450.0
27.5°	433.4
30°	416.5
32.5°	397.9
35°	378.7
37.5°	358.0
40°	336.3
42.5°	311.1
45°	282.3
47.5°	249.0
50°	211.8
52.5°	174.7
55°	139.2
57.5°	109.0
60°	82.3
62.5°	59.6
65°	40.8
67.5°	25.0
70°	13.0
72.5°	5.0
75°	2.2
77.5°	2.2
80°	1.9
82.5°	1.7
85°	1.7
87.5°	1.4
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)