

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839765

Luminaire Tested: **LDS4C15D010 EU4159030 4LBSWMH**

Issue Date: 8/24/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P839765  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205729)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/24/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDS4C15D010 EU4159030 4LBSWMH  
Description: 4 INCH 1500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS  
AND 4LBS TRIM WITH WMH FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1347.0 lumens  
Efficiency: N/A  
Efficacy: 85.3 lumens/watt  
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 15.8  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P839765

CATALOG NUMBER: LDS4C15D010 EU4159030 4LBSWMH

### Luminous Intensity Polar Plot

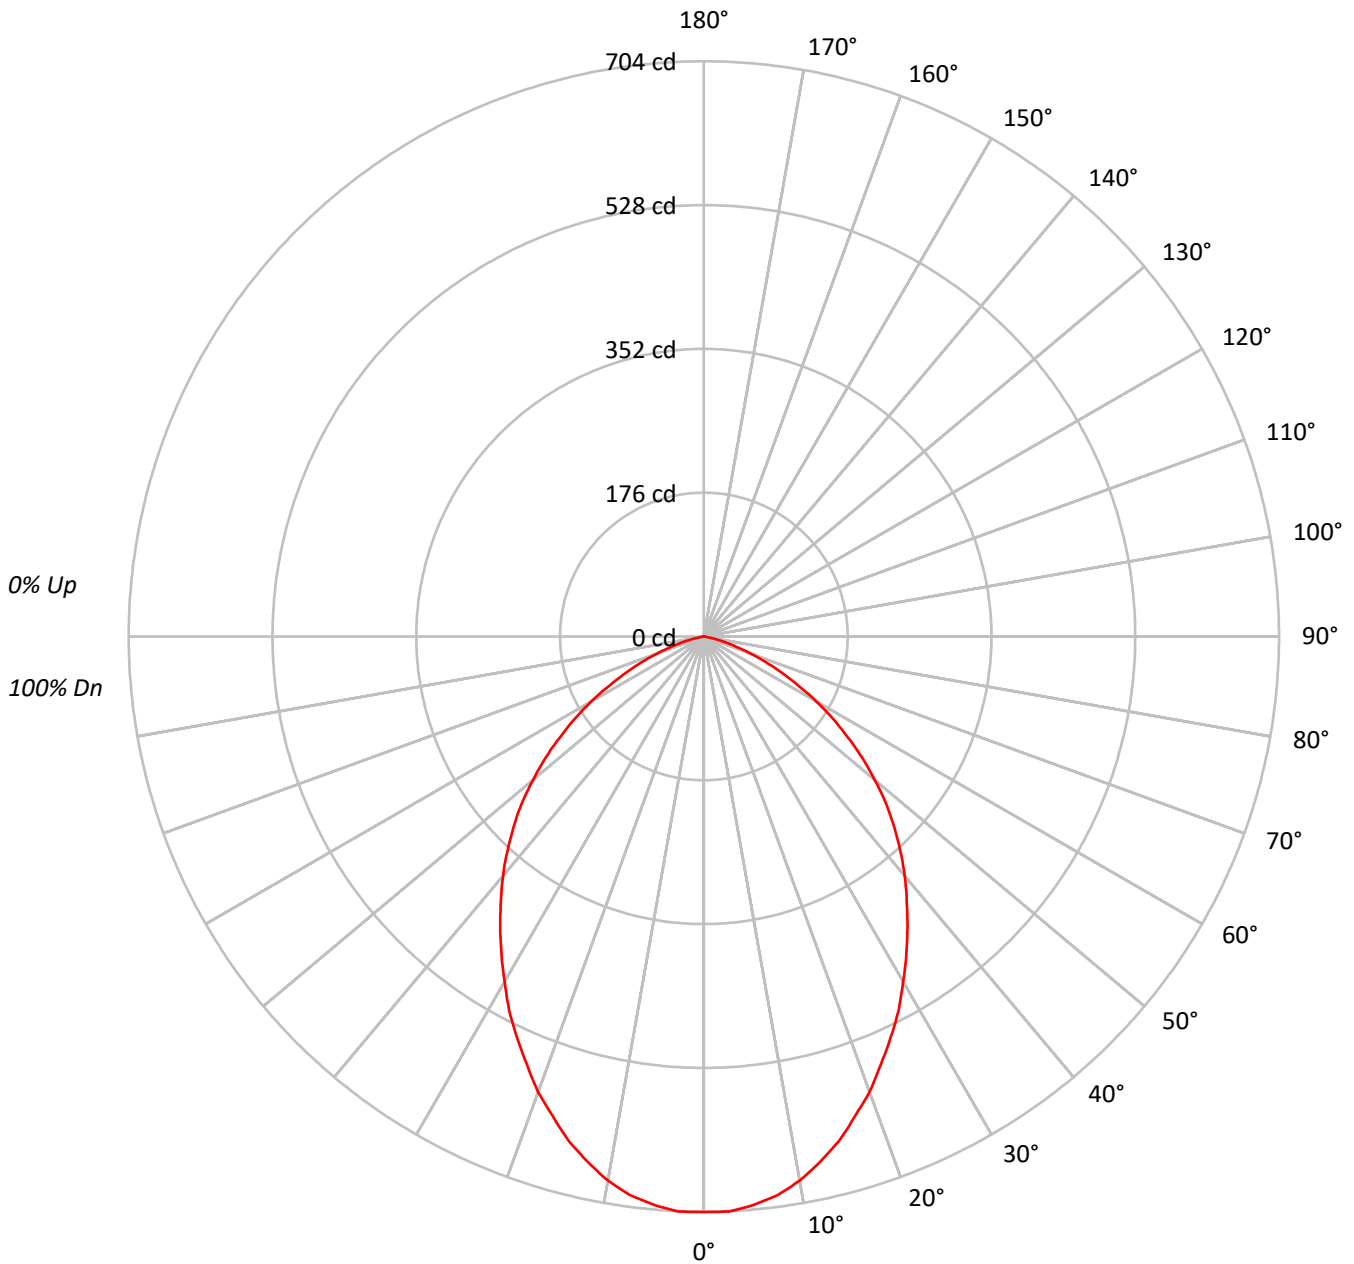



TEST NUMBER: P839765

CATALOG NUMBER: LDS4C15D010 EU4159030 4LBSWMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	86550
5°	86141
10°	84368
15°	81298
20°	77554
25°	73375
30°	69213
35°	65165
40°	61359
45°	57196
50°	52158
55°	46072
60°	38994
65°	30610
70°	21839
75°	11962
80°	2122
85°	0



TEST NUMBER: P839765

CATALOG NUMBER: LDS4C15D010 EU4159030 4LBSWMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	66.0	4.9
10°-20°	179.3	13.3
20°-30°	249.1	18.5
30°-40°	271.8	20.2
40°-50°	253.5	18.8
50°-60°	192.5	14.3
60°-70°	105.4	7.8
70°-80°	29.0	2.2
80°-90°	0.4	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	494.4	36.7
0°-40°	766.2	56.9
0°-60°	1212.2	90.0
0°-90°	1347.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1347.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	704	
5°	698	66
15°	639	179
25°	541	249
35°	434	272
45°	329	254
55°	215	192
65°	105	105
75°	25	29
85°	0	0
90°	0	



TEST NUMBER: P839765

CATALOG NUMBER: LDS4C15D010 EU4159030 4LBSWMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	704.5
2.5°	704.5
5°	698.5
7.5°	689.7
10°	676.3
12.5°	658.5
15°	639.2
17.5°	615.5
20°	593.2
22.5°	566.5
25°	541.3
27.5°	516.1
30°	487.9
32.5°	461.2
35°	434.5
37.5°	407.9
40°	382.6
42.5°	355.9
45°	329.2
47.5°	302.5
50°	272.9
52.5°	244.7
55°	215.1
57.5°	186.9
60°	158.7
62.5°	130.5
65°	105.3
67.5°	81.6
70°	60.8
72.5°	41.5
75°	25.2
77.5°	11.9
80°	3.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)