

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839786

Luminaire Tested: **LDS4C15D010 EU4159050 4LBCSMB**

Issue Date: 8/24/2022

Test Information

Test Method: LM-79-08
Report Number: P839786
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-18)
Test Lab: INNOVATION CENTER
Issue Date: 8/24/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDS4C15D010 EU4159050 4LBCSMB
Description: 4 INCH 1500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS
AND 4LBCS TRIM WITH MB FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1106.1 lumens
Efficiency: N/A
Efficacy: 70.0 lumens/watt
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.25
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 15.8
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P839786

CATALOG NUMBER: LDS4C15D010 EU4159050 4LBCSMB

Luminous Intensity Polar Plot

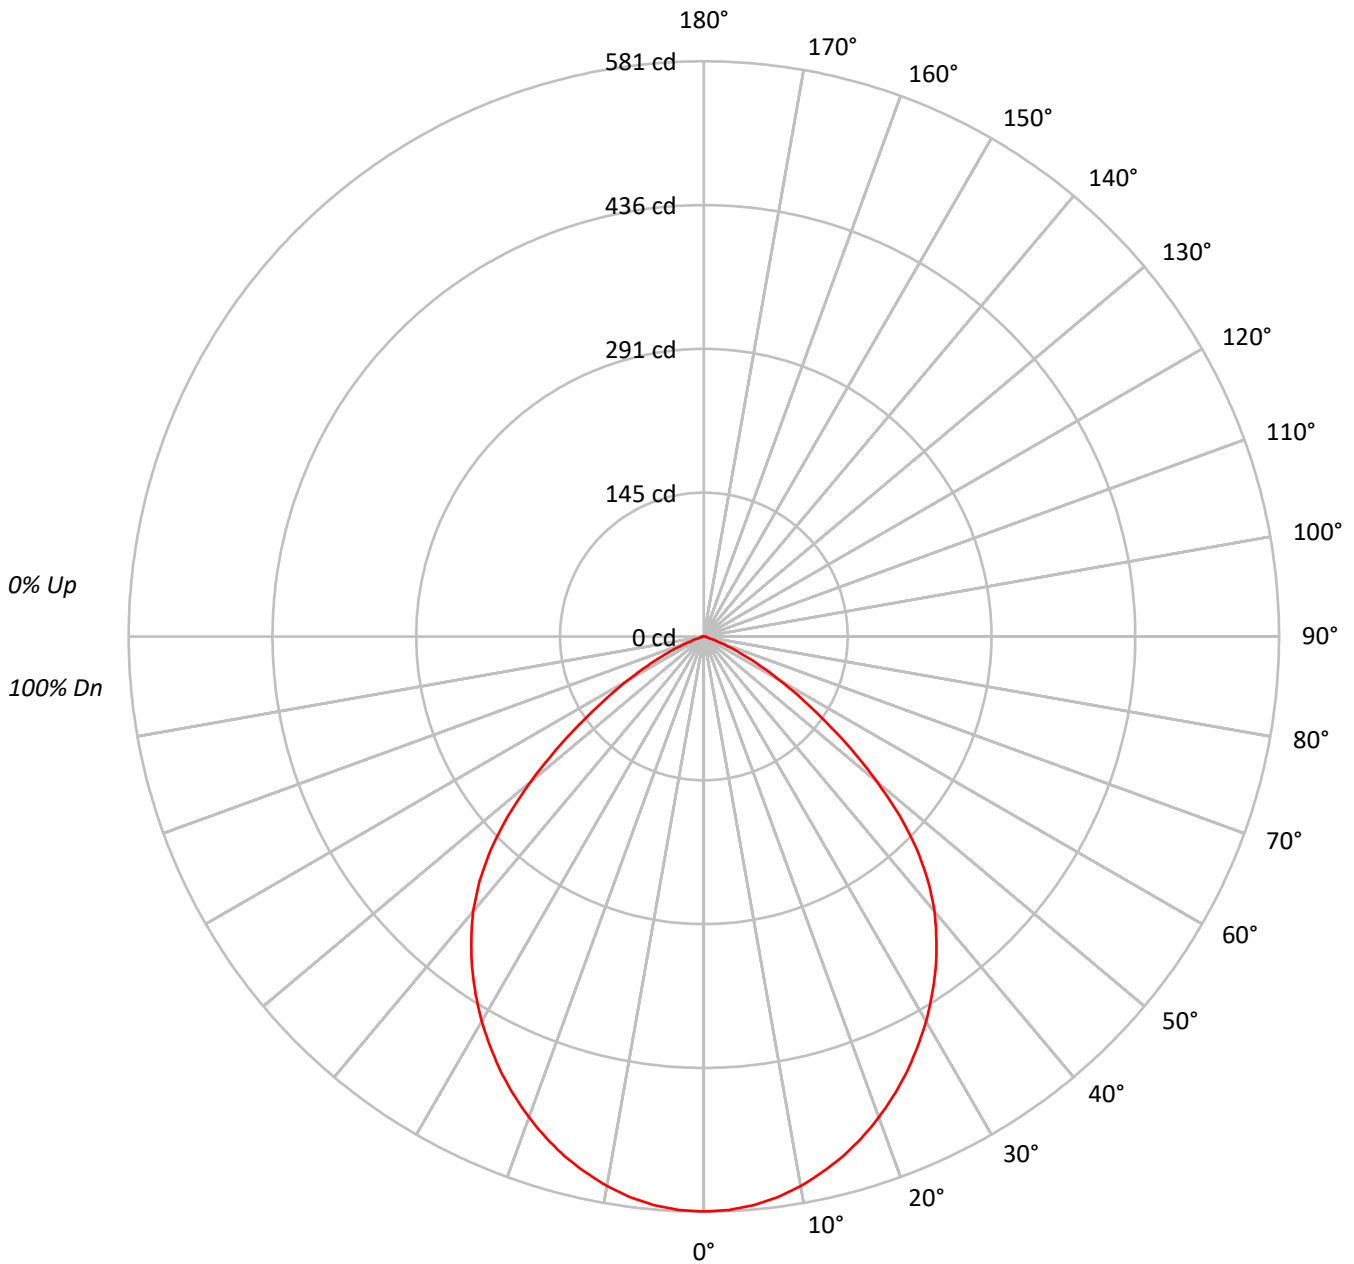



TEST NUMBER: P839786

CATALOG NUMBER: LDS4C15D010 EU4159050 4LBCSMB

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|----|----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 |
| RCR | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | | |
| 1 | 112 | 108 | 105 | 102 | 109 | 106 | 103 | 100 | 102 | 99 | 97 | 98 | 96 | 94 | 94 | 93 | 92 | 90 | | |
| 2 | 104 | 97 | 92 | 88 | 101 | 96 | 91 | 87 | 92 | 88 | 85 | 89 | 86 | 83 | 86 | 83 | 81 | 79 | | |
| 3 | 96 | 88 | 81 | 76 | 94 | 86 | 80 | 75 | 83 | 78 | 74 | 81 | 76 | 73 | 78 | 75 | 72 | 70 | | |
| 4 | 89 | 79 | 72 | 66 | 87 | 78 | 71 | 66 | 76 | 70 | 65 | 73 | 68 | 64 | 71 | 67 | 63 | 62 | | |
| 5 | 83 | 72 | 64 | 59 | 81 | 71 | 64 | 58 | 69 | 63 | 58 | 67 | 61 | 57 | 65 | 60 | 57 | 55 | | |
| 6 | 77 | 65 | 58 | 52 | 75 | 65 | 57 | 52 | 63 | 56 | 52 | 61 | 56 | 51 | 60 | 55 | 51 | 49 | | |
| 7 | 72 | 60 | 52 | 47 | 70 | 59 | 52 | 47 | 58 | 51 | 46 | 56 | 50 | 46 | 55 | 50 | 46 | 44 | | |
| 8 | 67 | 55 | 47 | 42 | 66 | 54 | 47 | 42 | 53 | 47 | 42 | 52 | 46 | 42 | 51 | 46 | 41 | 40 | | |
| 9 | 63 | 51 | 43 | 38 | 62 | 50 | 43 | 38 | 49 | 43 | 38 | 48 | 42 | 38 | 47 | 42 | 38 | 36 | | |
| 10 | 59 | 47 | 40 | 35 | 58 | 47 | 40 | 35 | 46 | 39 | 35 | 45 | 39 | 35 | 44 | 39 | 35 | 33 | | |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|-------|
| | 0° |
| 0° | 71341 |
| 5° | 71108 |
| 10° | 70321 |
| 15° | 69114 |
| 20° | 67565 |
| 25° | 65757 |
| 30° | 63680 |
| 35° | 61235 |
| 40° | 58152 |
| 45° | 52869 |
| 50° | 43653 |
| 55° | 32128 |
| 60° | 21819 |
| 65° | 12762 |
| 70° | 5029 |
| 75° | 1139 |
| 80° | 1486 |
| 85° | 2537 |



TEST NUMBER: P839786

CATALOG NUMBER: LDS4C15D010 EU4159050 4LBCSMB

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 54.6 | 4.9 |
| 10°-20° | 153.0 | 13.8 |
| 20°-30° | 223.2 | 20.2 |
| 30°-40° | 254.8 | 23.0 |
| 40°-50° | 231.6 | 20.9 |
| 50°-60° | 136.6 | 12.4 |
| 60°-70° | 45.8 | 4.1 |
| 70°-80° | 4.8 | 0.4 |
| 80°-90° | 1.7 | 0.2 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 430.8 | 39.0 |
| 0°-40° | 685.6 | 62.0 |
| 0°-60° | 1053.8 | 95.3 |
| 0°-90° | 1106.1 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 1106.1 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-----|------|
| 0° | 581 | |
| 5° | 577 | 55 |
| 15° | 543 | 153 |
| 25° | 485 | 223 |
| 35° | 408 | 255 |
| 45° | 304 | 232 |
| 55° | 150 | 137 |
| 65° | 44 | 46 |
| 75° | 2 | 5 |
| 85° | 2 | 2 |
| 90° | 0 | |



TEST NUMBER: P839786

CATALOG NUMBER: LDS4C15D010 EU4159050 4LBCSMB

CANDELA DISTRIBUTION (FULL):

| | 0° |
|-------|-------|
| 0° | 580.7 |
| 2.5° | 579.8 |
| 5° | 576.6 |
| 7.5° | 571.2 |
| 10° | 563.7 |
| 12.5° | 554.1 |
| 15° | 543.4 |
| 17.5° | 530.8 |
| 20° | 516.8 |
| 22.5° | 501.5 |
| 25° | 485.1 |
| 27.5° | 467.2 |
| 30° | 448.9 |
| 32.5° | 428.9 |
| 35° | 408.3 |
| 37.5° | 385.9 |
| 40° | 362.6 |
| 42.5° | 335.4 |
| 45° | 304.3 |
| 47.5° | 268.4 |
| 50° | 228.4 |
| 52.5° | 188.3 |
| 55° | 150.0 |
| 57.5° | 117.5 |
| 60° | 88.8 |
| 62.5° | 64.3 |
| 65° | 43.9 |
| 67.5° | 26.9 |
| 70° | 14.0 |
| 72.5° | 5.4 |
| 75° | 2.4 |
| 77.5° | 2.4 |
| 80° | 2.1 |
| 82.5° | 1.8 |
| 85° | 1.8 |
| 87.5° | 1.5 |
| 90° | 0.0 |



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)