

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839814

Luminaire Tested: **LDS4C20D010 EU4209030 4LBSWH**

Issue Date: 8/24/2022



Test Information

Test Method: LM-79-08
Report Number: P839814
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205729)
Test Lab: INNOVATION CENTER
Issue Date: 8/24/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDS4C20D010 EU4209030 4LBSWH
Description: 4 INCH 2000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS
AND 4LBS TRIM WITH WH FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1820.0 lumens
Efficiency: N/A
Efficacy: 83.5 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 21.8
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P839814

CATALOG NUMBER: LDS4C20D010 EU4209030 4LBSWH

Luminous Intensity Polar Plot

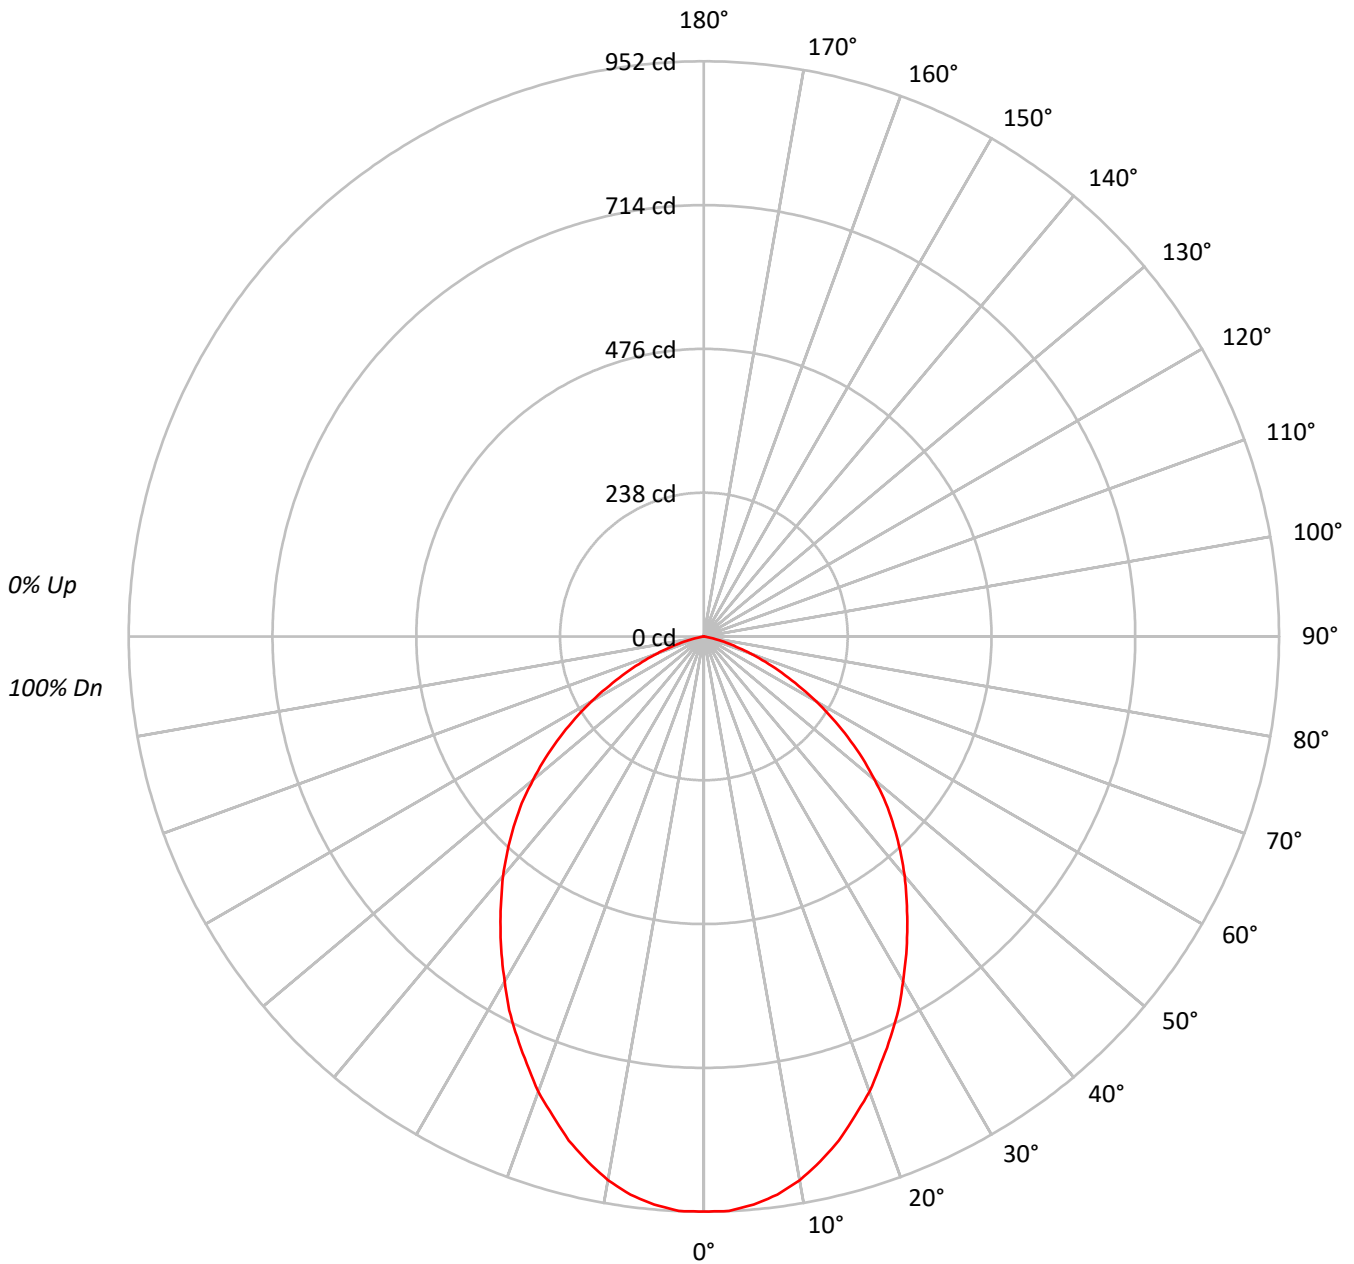



TEST NUMBER: P839814

CATALOG NUMBER: LDS4C20D010 EU4209030 4LBSWH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88																			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77																			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67																			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58																			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51																			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46																			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41																			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37																			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34																			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	116932
5°	116392
10°	113995
15°	109852
20°	104800
25°	99144
30°	93528
35°	88051
40°	82913
45°	77297
50°	70468
55°	62243
60°	52680
65°	41366
70°	29526
75°	16186
80°	2830
85°	0



TEST NUMBER: P839814

CATALOG NUMBER: LDS4C20D010 EU4209030 4LBSWH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	89.2	4.9
10°-20°	242.3	13.3
20°-30°	336.5	18.5
30°-40°	367.2	20.2
40°-50°	342.6	18.8
50°-60°	260.0	14.3
60°-70°	142.4	7.8
70°-80°	39.2	2.2
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	668.0	36.7
0°-40°	1035.3	56.9
0°-60°	1637.9	90.0
0°-90°	1820.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1820.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	952	
5°	944	89
15°	864	242
25°	731	337
35°	587	367
45°	445	343
55°	291	260
65°	142	142
75°	34	39
85°	0	1
90°	0	



TEST NUMBER: P839814

CATALOG NUMBER: LDS4C20D010 EU4209030 4LBSWH

CANDELA DISTRIBUTION (FULL):

	0°
0°	951.8
2.5°	951.8
5°	943.8
7.5°	931.8
10°	913.8
12.5°	889.8
15°	863.7
17.5°	831.7
20°	801.6
22.5°	765.5
25°	731.4
27.5°	697.4
30°	659.3
32.5°	623.2
35°	587.1
37.5°	551.1
40°	517.0
42.5°	480.9
45°	444.9
47.5°	408.8
50°	368.7
52.5°	330.6
55°	290.6
57.5°	252.5
60°	214.4
62.5°	176.4
65°	142.3
67.5°	110.2
70°	82.2
72.5°	56.1
75°	34.1
77.5°	16.0
80°	4.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)