

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839835

Luminaire Tested: **LDS4C20D010 EU4209040 4LBSWMH**

Issue Date: 8/24/2022

Test Information

Test Method: LM-79-08
Report Number: P839835
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205729)
Test Lab: INNOVATION CENTER
Issue Date: 8/24/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDS4C20D010 EU4209040 4LBSWMH
Description: 4 INCH 2000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, 90CRI LEDS
AND 4LBS TRIM WITH WMH FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1764.9 lumens
Efficiency: N/A
Efficacy: 81.0 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 21.8
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P839835

CATALOG NUMBER: LDS4C20D010 EU4209040 4LBSWMH

Luminous Intensity Polar Plot

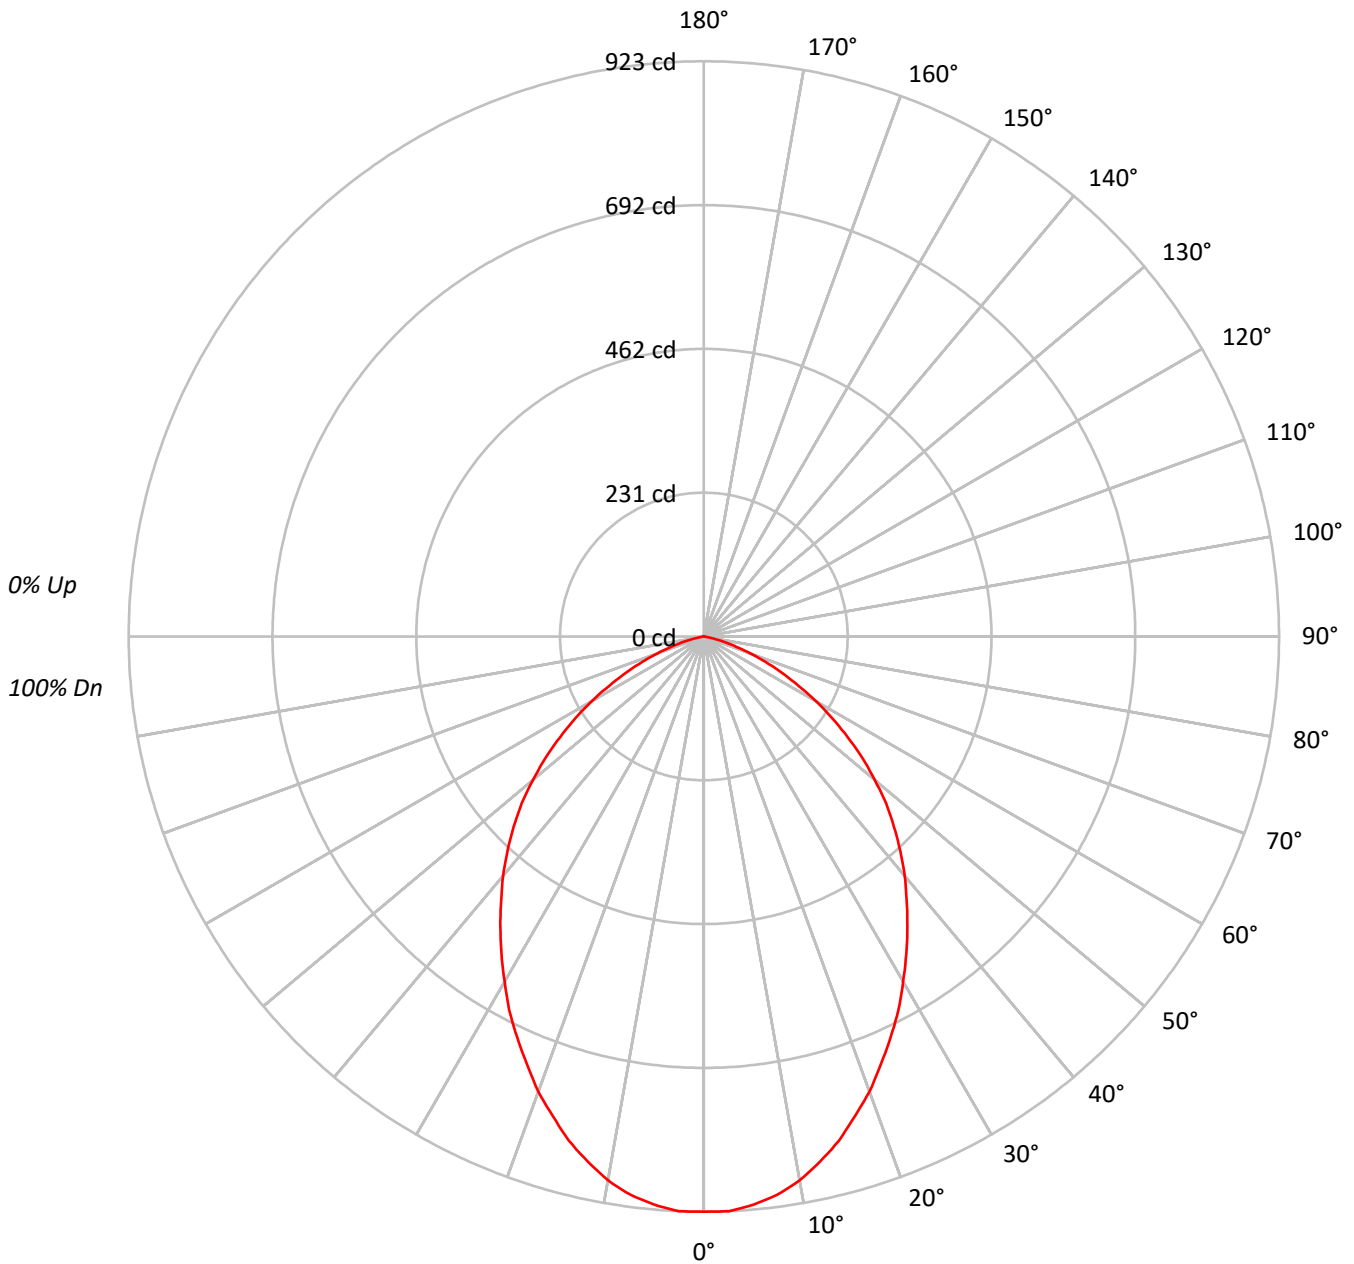



TEST NUMBER: P839835

CATALOG NUMBER: LDS4C20D010 EU4209040 4LBSWMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	113406
5°	112877
10°	110552
15°	106532
20°	101623
25°	96148
30°	90690
35°	85397
40°	80411
45°	74952
50°	68347
55°	60358
60°	51082
65°	40116
70°	28628
75°	15664
80°	2759
85°	0



TEST NUMBER: P839835

CATALOG NUMBER: LDS4C20D010 EU4209040 4LBSWMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	86.5	4.9
10°-20°	235.0	13.3
20°-30°	326.4	18.5
30°-40°	356.1	20.2
40°-50°	332.2	18.8
50°-60°	252.1	14.3
60°-70°	138.1	7.8
70°-80°	38.0	2.2
80°-90°	0.5	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	647.8	36.7
0°-40°	1004.0	56.9
0°-60°	1588.4	90.0
0°-90°	1764.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1764.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	923	
5°	915	86
15°	838	235
25°	709	326
35°	569	356
45°	431	332
55°	282	252
65°	138	138
75°	33	38
85°	0	1
90°	0	



TEST NUMBER: P839835

CATALOG NUMBER: LDS4C20D010 EU4209040 4LBSWMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	923.1
2.5°	923.1
5°	915.3
7.5°	903.7
10°	886.2
12.5°	862.9
15°	837.6
17.5°	806.5
20°	777.3
22.5°	742.4
25°	709.3
27.5°	676.3
30°	639.3
32.5°	604.4
35°	569.4
37.5°	534.4
40°	501.4
42.5°	466.4
45°	431.4
47.5°	396.4
50°	357.6
52.5°	320.6
55°	281.8
57.5°	244.8
60°	207.9
62.5°	171.0
65°	138.0
67.5°	106.9
70°	79.7
72.5°	54.4
75°	33.0
77.5°	15.5
80°	3.9
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)