

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839955

Luminaire Tested: **LDS4C35D010 EU4359027 4LBSWMH**

Issue Date: 8/24/2022



Test Information

Test Method: LM-79-08
Report Number: P839955
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P205729)
Test Lab: INNOVATION CENTER
Issue Date: 8/24/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LDS4C35D010 EU4359027 4LBSWMH
Description: 4 INCH 3500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2700K, 90CRI LEDS
AND 4LBS TRIM WITH WMH FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2909.0 lumens
Efficiency: N/A
Efficacy: 72.0 lumens/watt
Spacing Criteria (0/90/45): 1.06 / 1.06 / 1.17
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 40.4
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P839955

CATALOG NUMBER: LDS4C35D010 EU4359027 4LBSWMH

Luminous Intensity Polar Plot

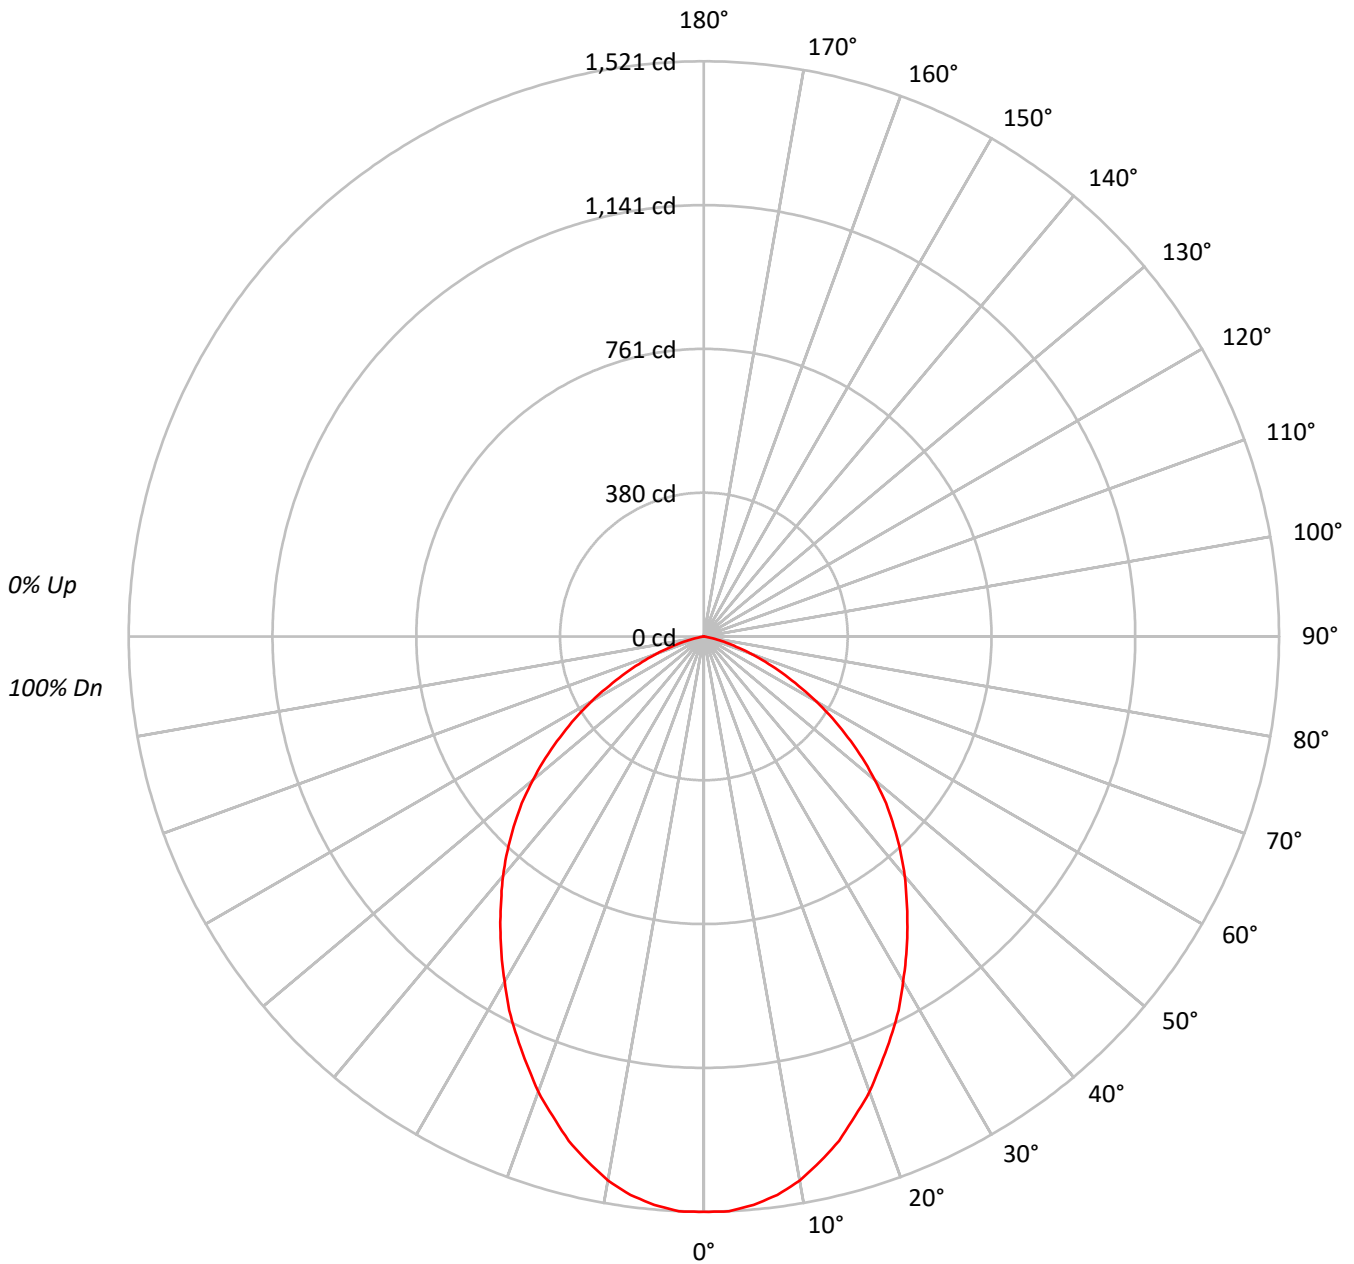



TEST NUMBER: P839955

CATALOG NUMBER: LDS4C35D010 EU4359027 4LBSWMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	111	107	104	101	108	105	102	99	101	98	96	97	95	93	93	92	90	88			
2	102	96	90	85	100	94	88	84	90	86	82	87	83	80	84	81	79	77			
3	95	85	78	73	92	84	77	72	81	75	71	78	74	70	76	72	69	67			
4	87	77	69	63	85	75	68	63	73	67	62	71	65	61	69	64	60	58			
5	81	69	61	55	79	68	61	55	66	60	55	64	59	54	63	58	53	51			
6	75	63	55	49	73	62	54	49	60	54	49	59	53	48	57	52	48	46			
7	70	58	50	44	68	57	49	44	55	49	44	54	48	43	53	47	43	41			
8	65	53	45	40	64	52	45	40	51	44	39	50	44	39	49	43	39	37			
9	61	49	41	36	60	48	41	36	47	40	36	46	40	36	45	40	35	34			
10	58	45	38	33	56	45	38	33	44	37	33	43	37	33	42	37	33	31			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	186909
5°	186045
10°	182208
15°	175582
20°	167501
25°	158462
30°	149491
35°	140753
40°	132517
45°	123530
50°	112650
55°	99491
60°	84204
65°	66104
70°	47199
75°	25869
80°	4528
85°	0



TEST NUMBER: P839955

CATALOG NUMBER: LDS4C35D010 EU4359027 4LBSWMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	142.5	4.9
10°-20°	387.3	13.3
20°-30°	537.9	18.5
30°-40°	587.0	20.2
40°-50°	547.6	18.8
50°-60°	415.6	14.3
60°-70°	227.6	7.8
70°-80°	62.6	2.2
80°-90°	0.9	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1067.8	36.7
0°-40°	1654.8	56.9
0°-60°	2617.9	90.0
0°-90°	2909.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2909.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1521	
5°	1509	143
15°	1380	387
25°	1169	538
35°	938	587
45°	711	548
55°	464	416
65°	227	228
75°	54	63
85°	0	1
90°	0	



TEST NUMBER: P839955

CATALOG NUMBER: LDS4C35D010 EU4359027 4LBSWMH

CANDELA DISTRIBUTION (FULL):

0°	
0°	1521.4
2.5°	1521.4
5°	1508.6
7.5°	1489.4
10°	1460.6
12.5°	1422.1
15°	1380.5
17.5°	1329.3
20°	1281.2
22.5°	1223.5
25°	1169.0
27.5°	1114.7
30°	1053.8
32.5°	996.1
35°	938.5
37.5°	880.8
40°	826.3
42.5°	768.7
45°	711.0
47.5°	653.4
50°	589.4
52.5°	528.5
55°	464.5
57.5°	403.5
60°	342.7
62.5°	281.9
65°	227.4
67.5°	176.1
70°	131.4
72.5°	89.7
75°	54.5
77.5°	25.6
80°	6.4
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)