

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P839957

Luminaire Tested: **LDS4C35D010 EU4359030 4LBCSMMS**

Issue Date: 8/24/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P839957  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-18)  
Test Lab: INNOVATION CENTER  
Issue Date: 8/24/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LDS4C35D010 EU4359030 4LBCSMMS  
Description: 4 INCH 3500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS  
AND 4LBCS TRIM WITH MMS FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2450.0 lumens  
Efficiency: N/A  
Efficacy: 60.6 lumens/watt  
Spacing Criteria (0/90/45): 1.16 / 1.16 / 1.25  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 40.4  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P839957

CATALOG NUMBER: LDS4C35D010 EU4359030 4LBCSMMS

### Luminous Intensity Polar Plot

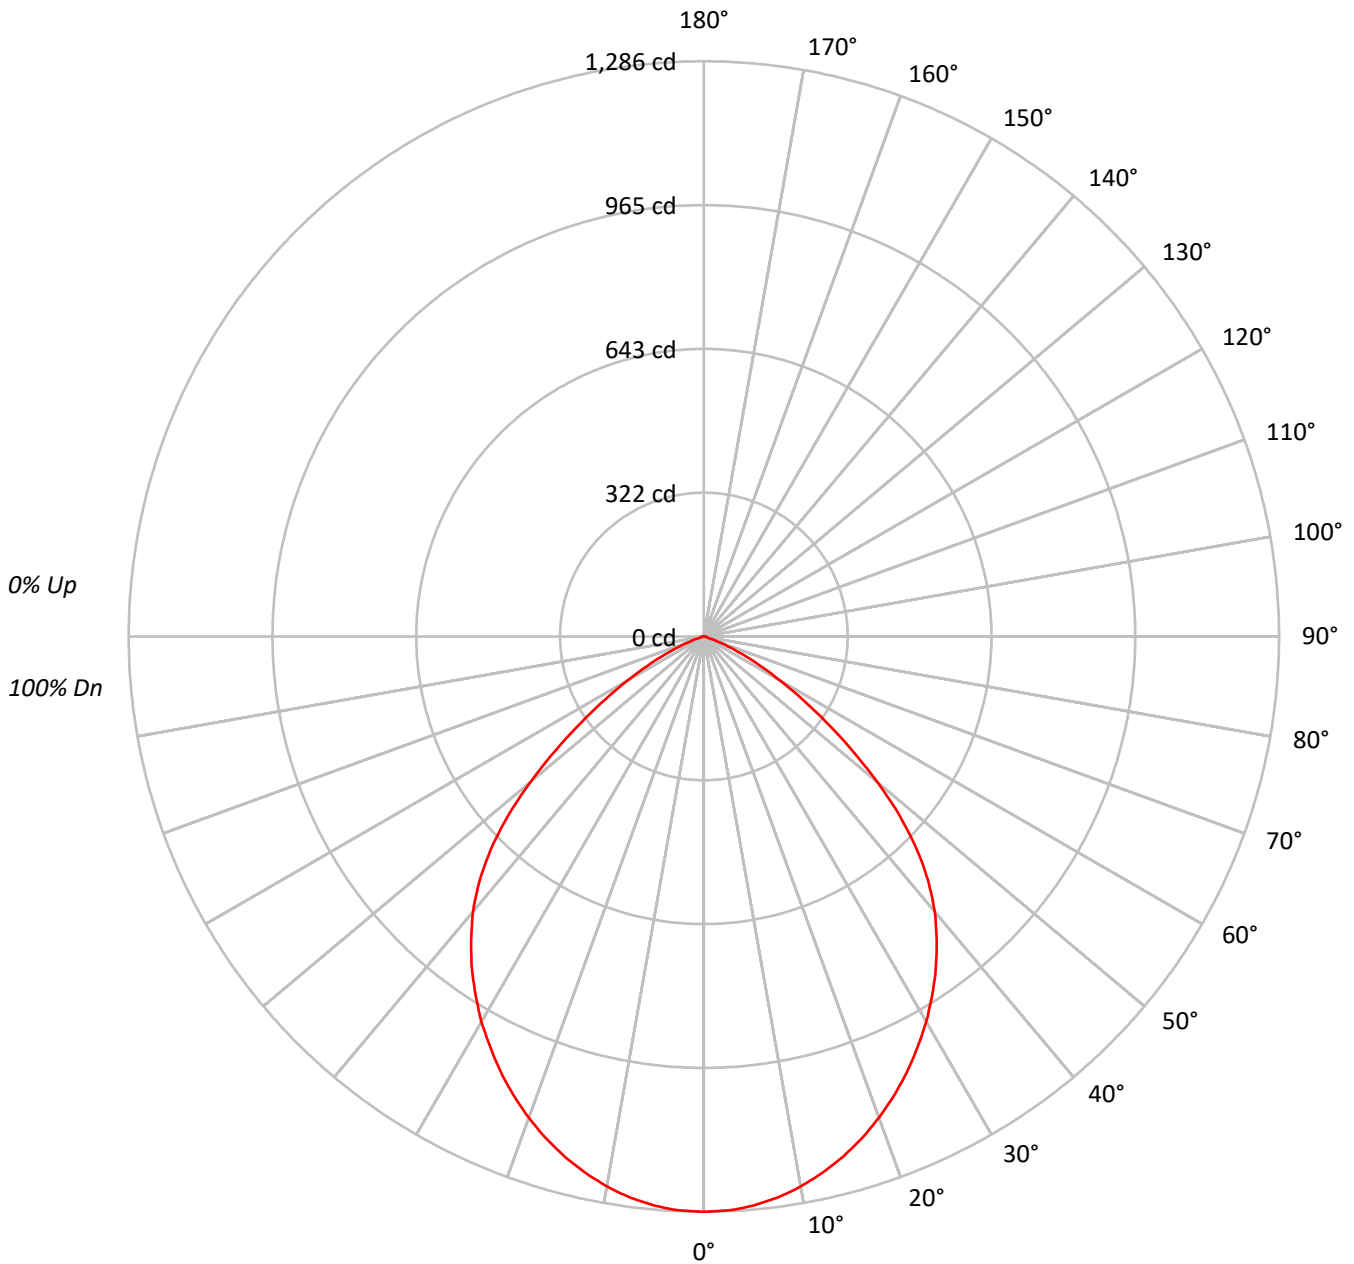



TEST NUMBER: P839957

CATALOG NUMBER: LDS4C35D010 EU4359030 4LBCSMMS

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	112	108	105	102	109	106	103	100	102	99	97	98	96	94	94	93	92	90																											
2	104	97	92	88	101	96	91	87	92	88	85	89	86	83	86	83	81	79																											
3	96	88	81	76	94	86	80	75	83	78	74	81	76	73	78	75	72	70																											
4	89	79	72	66	87	78	71	66	76	70	65	73	68	64	71	67	63	62																											
5	83	72	64	59	81	71	64	58	69	63	58	67	61	57	65	60	57	55																											
6	77	65	58	52	75	65	57	52	63	56	52	61	56	51	60	55	51	49																											
7	72	60	52	47	70	59	52	47	58	51	46	56	50	46	55	50	46	44																											
8	67	55	47	42	66	54	47	42	53	47	42	52	46	42	51	46	41	40																											
9	63	51	43	38	62	50	43	38	49	43	38	48	42	38	47	42	38	36																											
10	59	47	40	35	58	47	40	35	46	39	35	45	39	35	44	39	35	33																											

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	158039
5°	157508
10°	155774
15°	153095
20°	149669
25°	145666
30°	141079
35°	135639
40°	128796
45°	117101
50°	96672
55°	71196
60°	48306
65°	28285
70°	11171
75°	2516
80°	3254
85°	5638



TEST NUMBER: P839957

CATALOG NUMBER: LDS4C35D010 EU4359030 4LBCSMMS

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	121.0	4.9
10°-20°	338.9	13.8
20°-30°	494.4	20.2
30°-40°	564.3	23.0
40°-50°	513.0	20.9
50°-60°	302.6	12.3
60°-70°	101.5	4.1
70°-80°	10.6	0.4
80°-90°	3.7	0.2
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	954.3	39.0
0°-40°	1518.7	62.0
0°-60°	2334.2	95.3
0°-90°	2450.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2450.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1286	
5°	1277	121
15°	1204	339
25°	1075	494
35°	904	564
45°	674	513
55°	332	303
65°	97	101
75°	5	11
85°	4	4
90°	0	



TEST NUMBER: P839957

CATALOG NUMBER: LDS4C35D010 EU4359030 4LBCSMMS

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1286.4
2.5°	1284.5
5°	1277.2
7.5°	1265.3
10°	1248.7
12.5°	1227.5
15°	1203.7
17.5°	1175.9
20°	1144.8
22.5°	1111.0
25°	1074.6
27.5°	1034.9
30°	994.5
32.5°	950.1
35°	904.4
37.5°	854.8
40°	803.1
42.5°	742.9
45°	674.0
47.5°	594.6
50°	505.8
52.5°	417.1
55°	332.4
57.5°	260.2
60°	196.6
62.5°	142.4
65°	97.3
67.5°	59.6
70°	31.1
72.5°	11.9
75°	5.3
77.5°	5.3
80°	4.6
82.5°	4.0
85°	4.0
87.5°	3.3
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)