

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P856699

Luminaire Tested: **LX4C10D010 EX4C109027 4LBMH**

Issue Date: 2/8/2022

**Test Information**

Test Method: LM-79-08  
Report Number: P856699  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/8/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LX4C10D010 EX4C109027 4LBMH  
Description: 4 INCH 1000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2700K, 90CRI LEDS  
AND 4LBM TRIM WITH H FINISH  
Light Source: -  
Ballast/Driver:

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 729.0 lumens  
Efficiency: N/A  
Efficacy: 74.4 lumens/watt  
Spacing Criteria (0/90/45): 1.17 / 1.17 / 1.13  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 9.8  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P856699

CATALOG NUMBER: LX4C10D010 EX4C109027 4LBMH

### Luminous Intensity Polar Plot

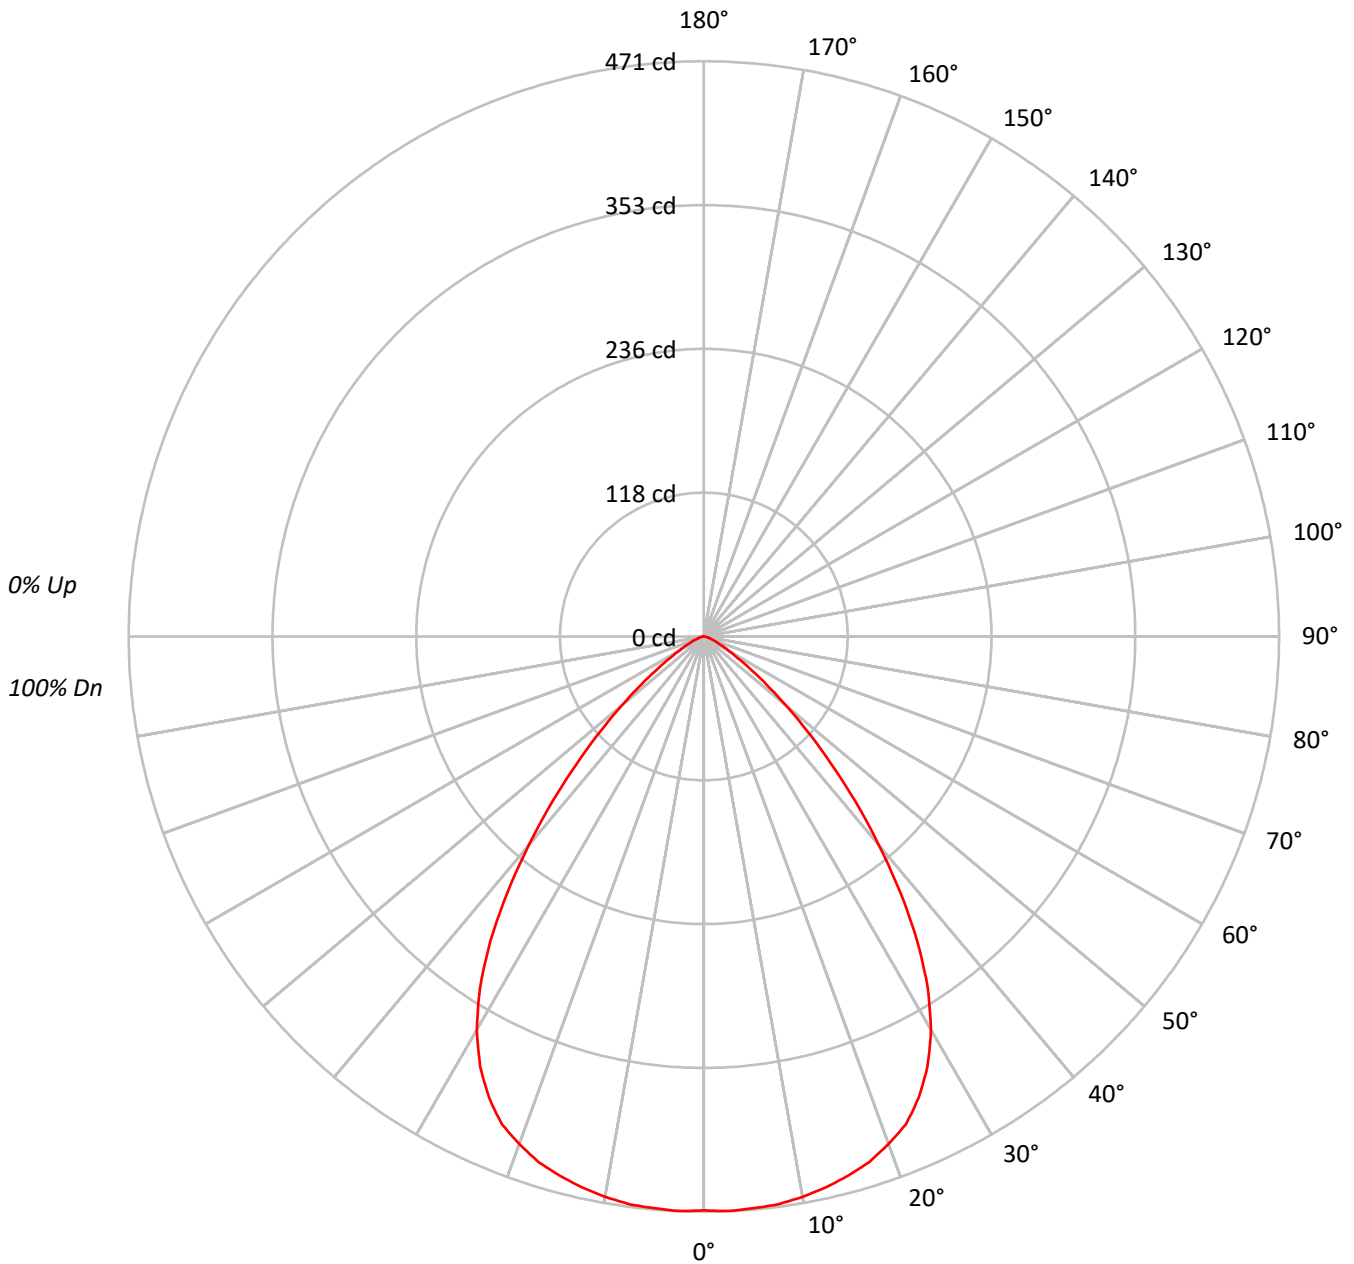



TEST NUMBER: P856699

CATALOG NUMBER: LX4C10D010 EX4C109027 4LBMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91			
2	105	100	95	91	103	98	93	90	95	91	88	91	88	86	89	86	84	82			
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74			
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	62	61			
6	81	71	64	58	80	70	63	58	68	62	58	67	61	57	65	61	57	55			
7	76	65	58	53	75	65	58	53	63	57	53	62	56	52	61	56	52	50			
8	72	60	53	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46			
9	68	56	49	45	66	56	49	45	55	49	44	54	48	44	53	48	44	43			
10	64	52	46	41	63	52	46	41	51	45	41	50	45	41	49	44	41	39			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	57729
5°	57949
10°	58120
15°	58125
20°	57812
25°	56458
30°	52757
35°	45698
40°	35699
45°	25609
50°	16628
55°	9960
60°	5823
65°	3750
70°	2478
75°	1899
80°	1415
85°	0



TEST NUMBER: P856699

CATALOG NUMBER: LX4C10D010 EX4C109027 4LBMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	44.7	6.1
10°-20°	128.9	17.7
20°-30°	190.3	26.1
30°-40°	187.8	25.8
40°-50°	114.9	15.8
50°-60°	44.0	6.0
60°-70°	13.8	1.9
70°-80°	4.1	0.6
80°-90°	0.5	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	364.0	49.9
0°-40°	551.7	75.7
0°-60°	710.6	97.5
0°-90°	729.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	729.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	470	
5°	470	45
15°	457	129
25°	416	190
35°	305	188
45°	147	115
55°	46	44
65°	13	14
75°	4	4
85°	0	1
90°	0	



TEST NUMBER: P856699

CATALOG NUMBER: LX4C10D010 EX4C109027 4LBMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	469.9
2.5°	470.9
5°	469.9
7.5°	468.9
10°	465.9
12.5°	462.0
15°	457.0
17.5°	451.1
20°	442.2
22.5°	432.3
25°	416.5
27.5°	396.7
30°	371.9
32.5°	341.3
35°	304.7
37.5°	264.1
40°	222.6
42.5°	184.0
45°	147.4
47.5°	114.7
50°	87.0
52.5°	64.3
55°	46.5
57.5°	32.6
60°	23.7
62.5°	17.8
65°	12.9
67.5°	9.9
70°	6.9
72.5°	5.0
75°	4.0
77.5°	2.0
80°	2.0
82.5°	1.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)