

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P856767

Luminaire Tested: **LX4C10D010 EX4C109040 4LBMDH**

Issue Date: 2/18/2022



Test Information

Test Method: LM-79-08
Report Number: P856767
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-9)
Test Lab: INNOVATION CENTER
Issue Date: 2/18/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C10D010 EX4C109040 4LBMDH
Description: 4 INCH 1000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, 90CRI LEDS
AND 4LRMD45 TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 728.0 lumens
Efficiency: N/A
Efficacy: 74.3 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.83
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.8
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P856767

CATALOG NUMBER: LX4C10D010 EX4C109040 4LBMDH

Luminous Intensity Polar Plot

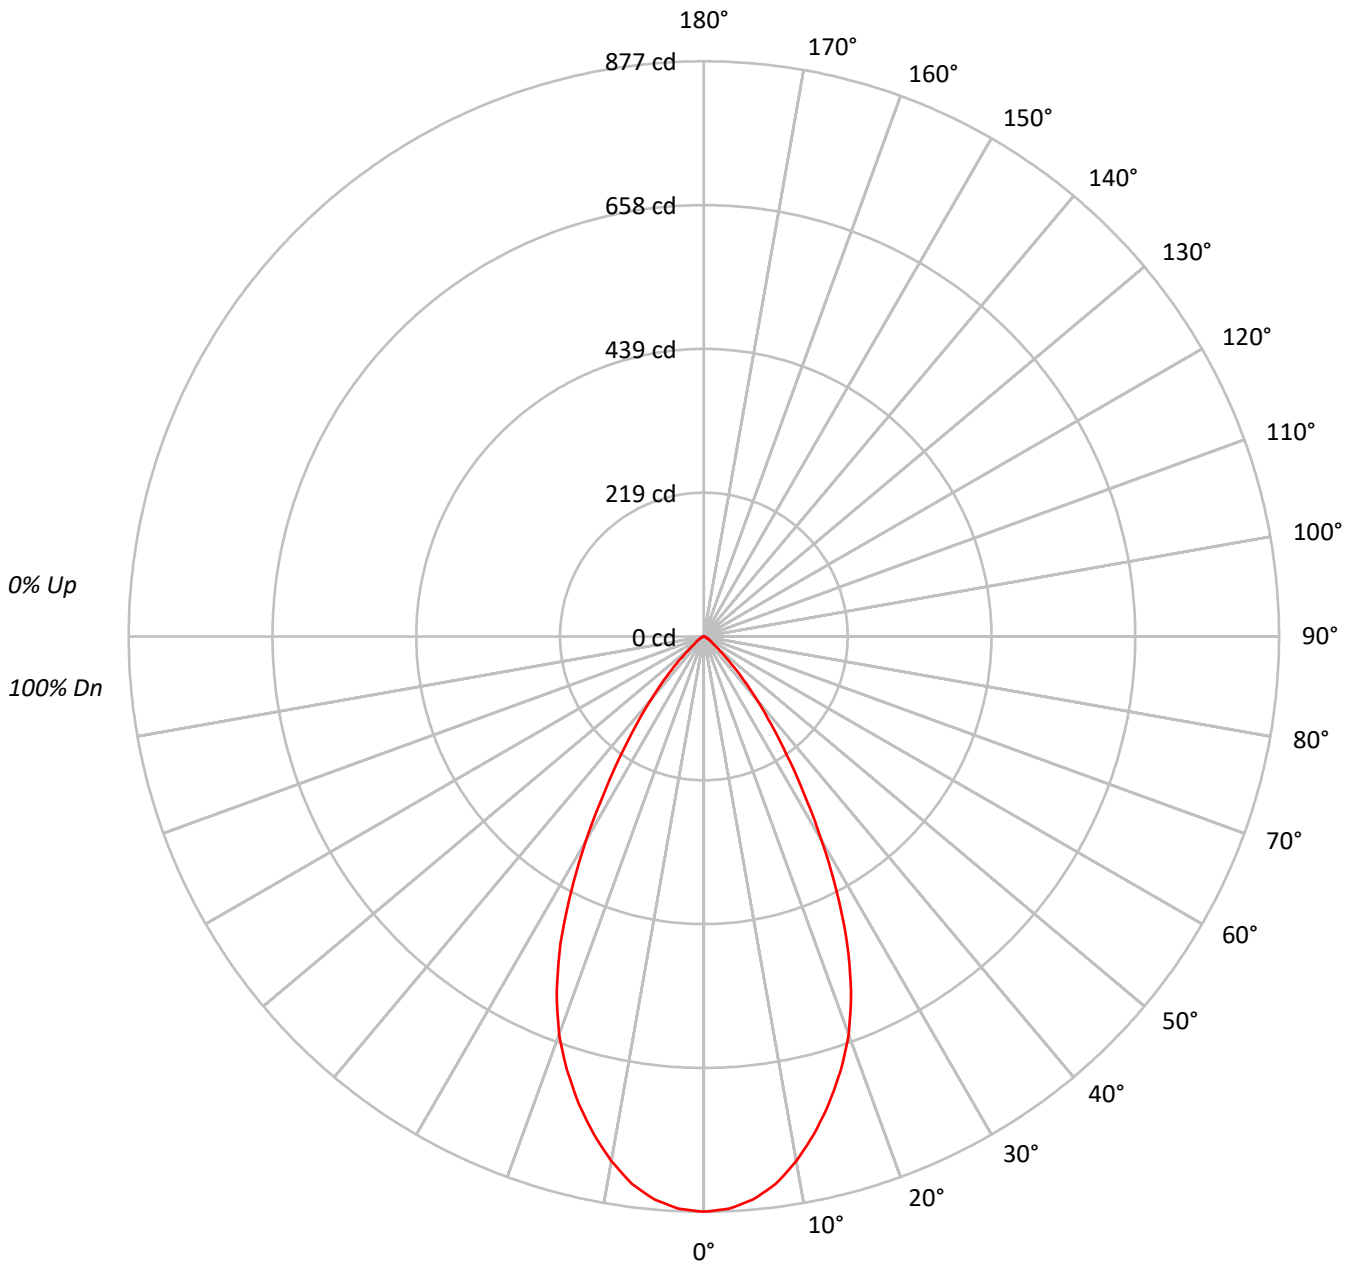



TEST NUMBER: P856767

CATALOG NUMBER: LX4C10D010 EX4C109040 4LBMDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	81			
4	97	90	84	80	95	88	83	79	86	82	78	84	80	77	82	79	77	75			
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70			
6	88	79	73	68	86	78	72	68	76	71	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61			
8	79	70	64	60	78	69	64	60	68	63	59	67	62	59	66	62	59	57			
9	76	66	60	56	74	65	60	56	64	59	56	64	59	56	63	58	55	54			
10	72	62	57	53	71	62	56	53	61	56	53	60	56	52	60	55	52	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	107742
5°	106292
10°	101308
15°	93737
20°	84391
25°	70108
30°	50956
35°	33040
40°	19999
45°	10303
50°	4663
55°	2806
60°	1892
65°	1337
70°	1006
75°	665
80°	424
85°	282



TEST NUMBER: P856767

CATALOG NUMBER: LX4C10D010 EX4C109040 4LBMDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	80.7	11.1
10°-20°	205.7	28.3
20°-30°	232.6	31.9
30°-40°	140.6	19.3
40°-50°	49.2	6.8
50°-60°	12.6	1.7
60°-70°	4.8	0.7
70°-80°	1.6	0.2
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	518.9	71.3
0°-40°	659.5	90.6
0°-60°	721.3	99.1
0°-90°	728.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	728.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	877	
5°	862	81
15°	737	206
25°	517	233
35°	220	141
45°	59	49
55°	13	13
65°	5	5
75°	1	2
85°	0	0
90°	0	



TEST NUMBER: P856767

CATALOG NUMBER: LX4C10D010 EX4C109040 4LBMDH

CANDELA DISTRIBUTION (FULL):

	0°
0°	877.0
2.5°	873.4
5°	861.9
7.5°	841.5
10°	812.1
12.5°	776.6
15°	737.0
17.5°	693.7
20°	645.5
22.5°	586.4
25°	517.2
27.5°	437.9
30°	359.2
32.5°	284.0
35°	220.3
37.5°	167.0
40°	124.7
42.5°	89.6
45°	59.3
47.5°	36.5
50°	24.4
52.5°	17.5
55°	13.1
57.5°	10.1
60°	7.7
62.5°	6.1
65°	4.6
67.5°	3.6
70°	2.8
72.5°	2.0
75°	1.4
77.5°	1.0
80°	0.6
82.5°	0.4
85°	0.2
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)