

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P856855

Luminaire Tested: **LX4C10D010 EX4C109840 4LBSLI**

Issue Date: 2/9/2022



Test Information

Test Method: LM-79-08
Report Number: P856855
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208407)
Test Lab: INNOVATION CENTER
Issue Date: 2/9/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C10D010 EX4C109840 4LBSLI
Description:
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 935.5 lumens
Efficiency: N/A
Efficacy: 95.5 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 1
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 9.8
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P856855

CATALOG NUMBER: LX4C10D010 EX4C109840 4LBSLI

Luminous Intensity Polar Plot

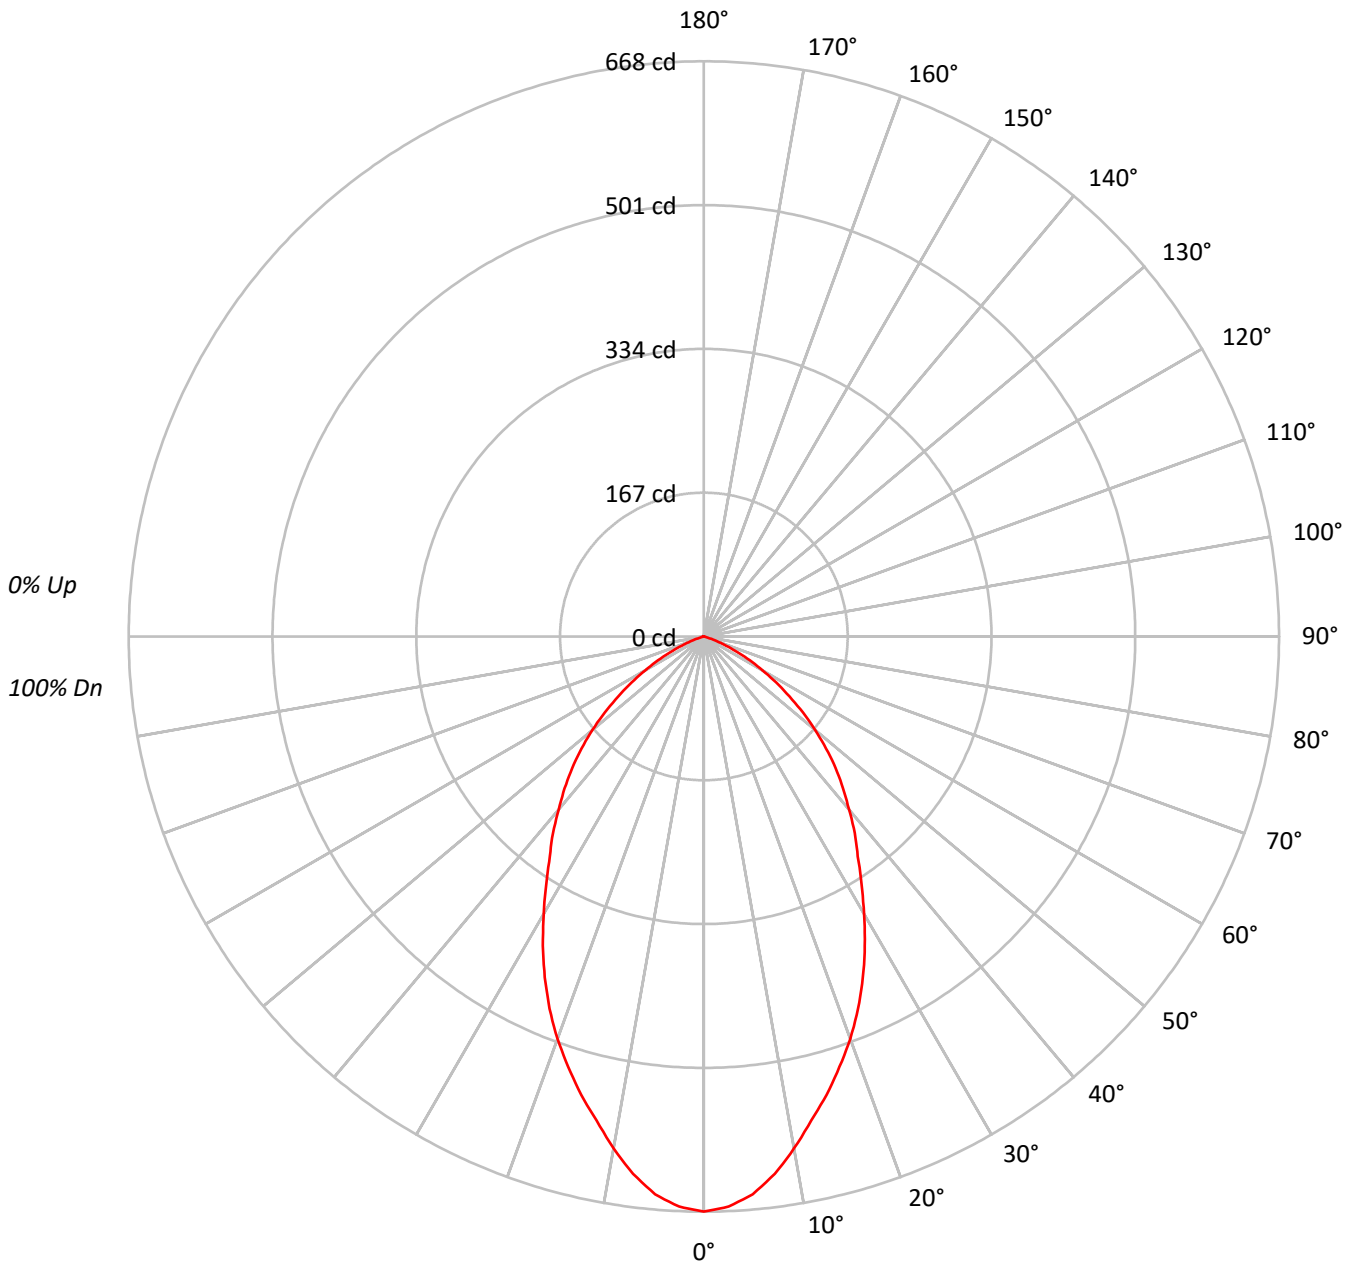



TEST NUMBER: P856855

CATALOG NUMBER: LX4C10D010 EX4C109840 4LBSLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	108	105	102	109	106	103	101	102	100	98	98	96	95	95	93	92	90			90
2	104	98	93	88	102	96	91	87	93	89	85	90	86	84	87	84	82	80			80
3	97	89	82	77	95	87	81	77	84	79	75	82	78	74	79	76	73	71			71
4	90	81	73	68	88	79	73	68	77	71	67	75	70	66	73	69	65	63			63
5	84	73	66	61	82	72	65	60	70	64	60	69	63	59	67	62	59	57			57
6	79	67	60	54	77	66	59	54	65	58	54	63	58	53	62	57	53	51			51
7	74	62	54	49	72	61	54	49	60	53	49	58	53	48	57	52	48	46			46
8	69	57	50	45	68	57	50	45	55	49	45	54	49	44	53	48	44	42			42
9	65	53	46	41	64	53	46	41	52	45	41	51	45	41	50	44	41	39			39
10	61	50	43	38	60	49	42	38	48	42	38	47	42	38	46	41	37	36			36

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	82054
5°	80197
10°	75311
15°	70067
20°	64990
25°	59237
30°	52743
35°	46748
40°	42018
45°	37598
50°	32262
55°	25960
60°	19337
65°	12326
70°	5963
75°	997
80°	778
85°	0



TEST NUMBER: P856855

CATALOG NUMBER: LX4C10D010 EX4C109840 4LBSLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	60.6	6.5
10°-20°	154.5	16.5
20°-30°	200.2	21.4
30°-40°	196.1	21.0
40°-50°	166.2	17.8
50°-60°	109.0	11.6
60°-70°	43.8	4.7
70°-80°	5.0	0.5
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	415.2	44.4
0°-40°	611.3	65.3
0°-60°	886.5	94.8
0°-90°	935.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	935.5	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	668	
5°	650	61
15°	551	154
25°	437	200
35°	312	196
45°	216	166
55°	121	109
65°	42	44
75°	2	5
85°	0	0
90°	0	



TEST NUMBER: P856855

CATALOG NUMBER: LX4C10D010 EX4C109840 4LBSLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	667.9
2.5°	662.7
5°	650.3
7.5°	629.6
10°	603.7
12.5°	575.8
15°	550.9
17.5°	524.0
20°	497.1
22.5°	468.1
25°	437.0
27.5°	404.9
30°	371.8
32.5°	340.7
35°	311.7
37.5°	287.9
40°	262.0
42.5°	239.3
45°	216.4
47.5°	192.6
50°	168.8
52.5°	145.0
55°	121.2
57.5°	99.4
60°	78.7
62.5°	60.0
65°	42.4
67.5°	28.0
70°	16.6
72.5°	7.2
75°	2.1
77.5°	1.1
80°	1.1
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)