

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P856866

Luminaire Tested: **LX4C10D010 EX4C109850 4LBNLI**

Issue Date: 1/21/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P856866  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/21/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LX4C10D010 EX4C109850 4LBNLI  
Description:  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 685.8 lumens  
Efficiency: N/A  
Efficacy: 70.0 lumens/watt  
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 9.8  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P856866

CATALOG NUMBER: LX4C10D010 EX4C109850 4LBNLI

### Luminous Intensity Polar Plot

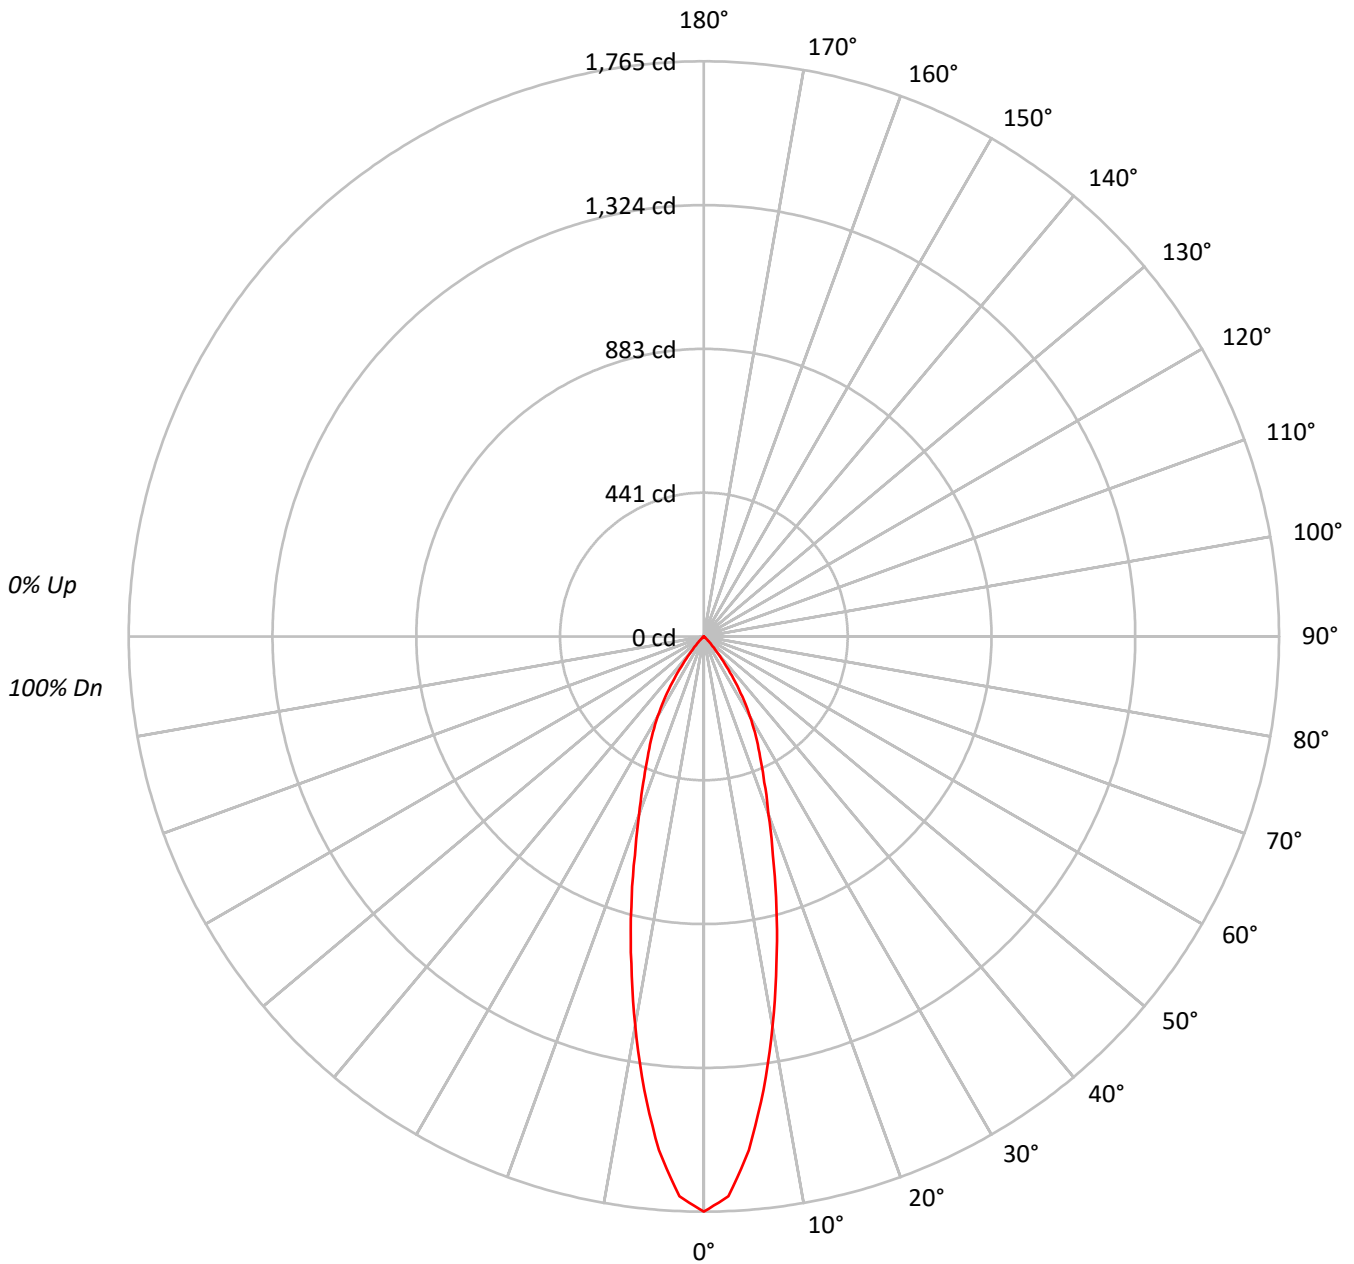



TEST NUMBER: P856866

CATALOG NUMBER: LX4C10D010 EX4C109850 4LBNI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10		0		
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	92	90	90	90	90
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85	85	85	85
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81	81	81	81
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77	77	77	77
6	92	85	80	76	91	84	79	76	83	78	75	81	78	75	80	77	74	73	73	73	73
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	69	69	69	69
8	85	77	72	68	84	77	72	68	76	71	68	75	71	68	74	70	67	66	66	66	66
9	82	74	69	65	81	73	68	65	72	68	65	72	68	65	71	67	64	63	63	63	63
10	79	71	66	62	78	70	65	62	69	65	62	69	65	62	68	64	62	61	61	61	61

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	216812
5°	195097
10°	151245
15°	109470
20°	75802
25°	55252
30°	40146
35°	23771
40°	9991
45°	3110
50°	401
55°	236
60°	270
65°	320
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P856866

CATALOG NUMBER: LX4C10D010 EX4C109850 4LBNLI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	139.1	20.3
10°-20°	238.1	34.7
20°-30°	189.2	27.6
30°-40°	100.2	14.6
40°-50°	17.2	2.5
50°-60°	1.3	0.2
60°-70°	0.7	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	566.4	82.6
0°-40°	666.6	97.2
0°-60°	685.1	99.9
0°-90°	685.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	685.8	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1765	
5°	1582	139
15°	861	238
25°	408	189
35°	158	100
45°	18	17
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P856866

CATALOG NUMBER: LX4C10D010 EX4C109850 4LBNLI

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	1764.8
2.5°	1719.3
5°	1582.0
7.5°	1402.5
10°	1212.4
12.5°	1028.6
15°	860.7
17.5°	704.4
20°	579.8
22.5°	484.8
25°	407.6
27.5°	345.4
30°	283.0
32.5°	219.6
35°	158.5
37.5°	104.6
40°	62.3
42.5°	35.9
45°	17.9
47.5°	6.3
50°	2.1
52.5°	2.1
55°	1.1
57.5°	1.1
60°	1.1
62.5°	1.1
65°	1.1
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)