

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P856889

Luminaire Tested: **LX4C10D010 EX4C109030 4LBMH**

Issue Date: 2/8/2022



Test Information

Test Method: LM-79-08
Report Number: P856889
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C10D010 EX4C109030 4LBMH
Description: 4 INCH 1000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS
AND 4LBM TRIM WITH H FINISH, DIM TO WARM
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1040.9 lumens
Efficiency: N/A
Efficacy: 61.2 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 17
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P856889

CATALOG NUMBER: LX4C10D010 EX4C109030 4LBMH

Luminous Intensity Polar Plot

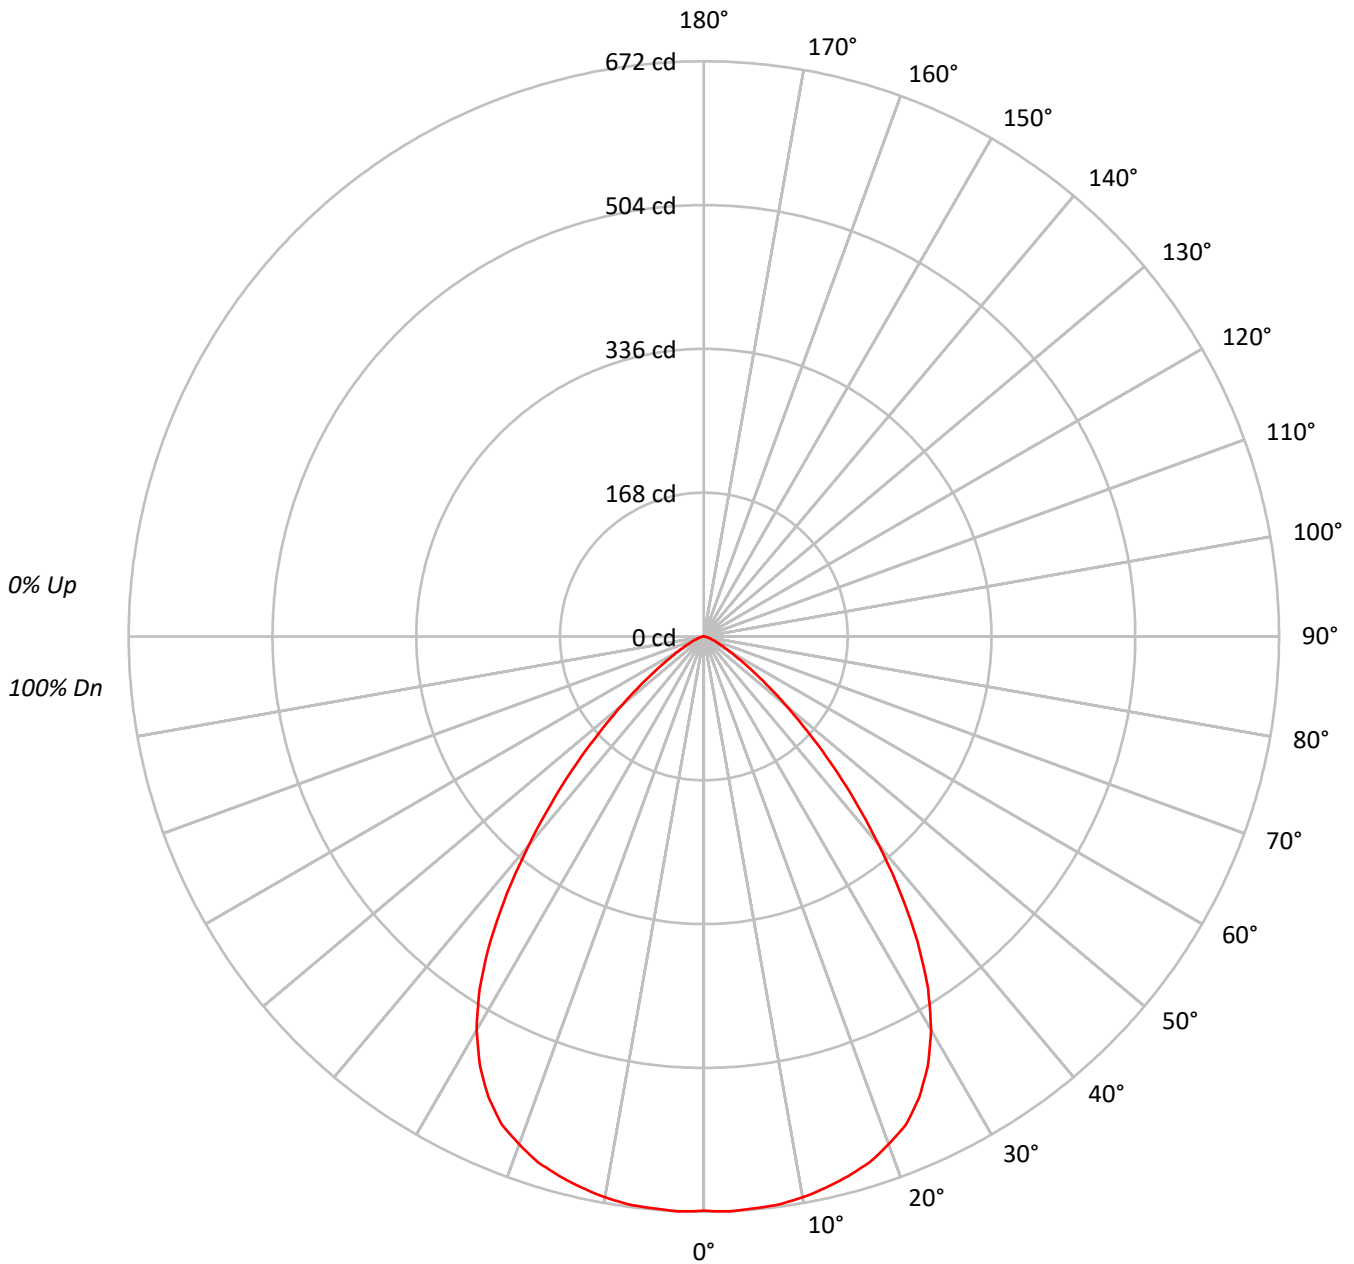



TEST NUMBER: P856889

CATALOG NUMBER: LX4C10D010 EX4C109030 4LBMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91			
2	105	100	95	91	103	98	93	90	95	91	88	91	88	86	89	86	84	82			
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74			
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	62	61			
6	81	71	64	58	80	70	63	58	68	62	58	67	61	57	65	61	57	55			
7	76	65	58	53	75	65	58	53	63	57	53	62	56	52	61	56	52	50			
8	72	60	53	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46			
9	68	56	49	45	66	56	49	45	55	49	44	54	48	44	53	48	44	43			
10	64	52	46	41	63	52	46	41	51	45	41	50	45	41	49	44	41	39			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	82422
5°	82737
10°	83008
15°	82990
20°	82535
25°	80614
30°	75327
35°	65255
40°	50967
45°	36590
50°	23757
55°	14201
60°	8329
65°	5349
70°	3556
75°	2658
80°	1981
85°	0



TEST NUMBER: P856889

CATALOG NUMBER: LX4C10D010 EX4C109030 4LBMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	63.9	6.1
10°-20°	184.1	17.7
20°-30°	271.7	26.1
30°-40°	268.1	25.8
40°-50°	164.1	15.8
50°-60°	62.9	6.0
60°-70°	19.7	1.9
70°-80°	5.7	0.5
80°-90°	0.8	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	519.6	49.9
0°-40°	787.7	75.7
0°-60°	1014.7	97.5
0°-90°	1040.9	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1040.9	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	671	
5°	671	64
15°	652	184
25°	595	272
35°	435	268
45°	211	164
55°	66	63
65°	18	20
75°	6	6
85°	0	1
90°	0	



TEST NUMBER: P856889

CATALOG NUMBER: LX4C10D010 EX4C109030 4LBMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	670.9
2.5°	672.4
5°	670.9
7.5°	669.4
10°	665.4
12.5°	659.6
15°	652.5
17.5°	644.1
20°	631.3
22.5°	617.2
25°	594.7
27.5°	566.3
30°	531.0
32.5°	487.3
35°	435.1
37.5°	377.1
40°	317.8
42.5°	262.7
45°	210.6
47.5°	163.9
50°	124.3
52.5°	91.9
55°	66.3
57.5°	46.6
60°	33.9
62.5°	25.4
65°	18.4
67.5°	14.1
70°	9.9
72.5°	7.0
75°	5.6
77.5°	2.8
80°	2.8
82.5°	1.4
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)