

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857218

Luminaire Tested: **LX4C20D010 EX4C209050 4LBWH**

Issue Date: 2/8/2022



Test Information

Test Method: LM-79-08
Report Number: P857218
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C20D010 EX4C209050 4LBWH
Description: 4 INCH 2000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS
AND 4LBW TRIM WITH H FINISH
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1726.0 lumens
Efficiency: N/A
Efficacy: 79.2 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 21.8
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P857218

CATALOG NUMBER: LX4C20D010 EX4C209050 4LBWH

Luminous Intensity Polar Plot

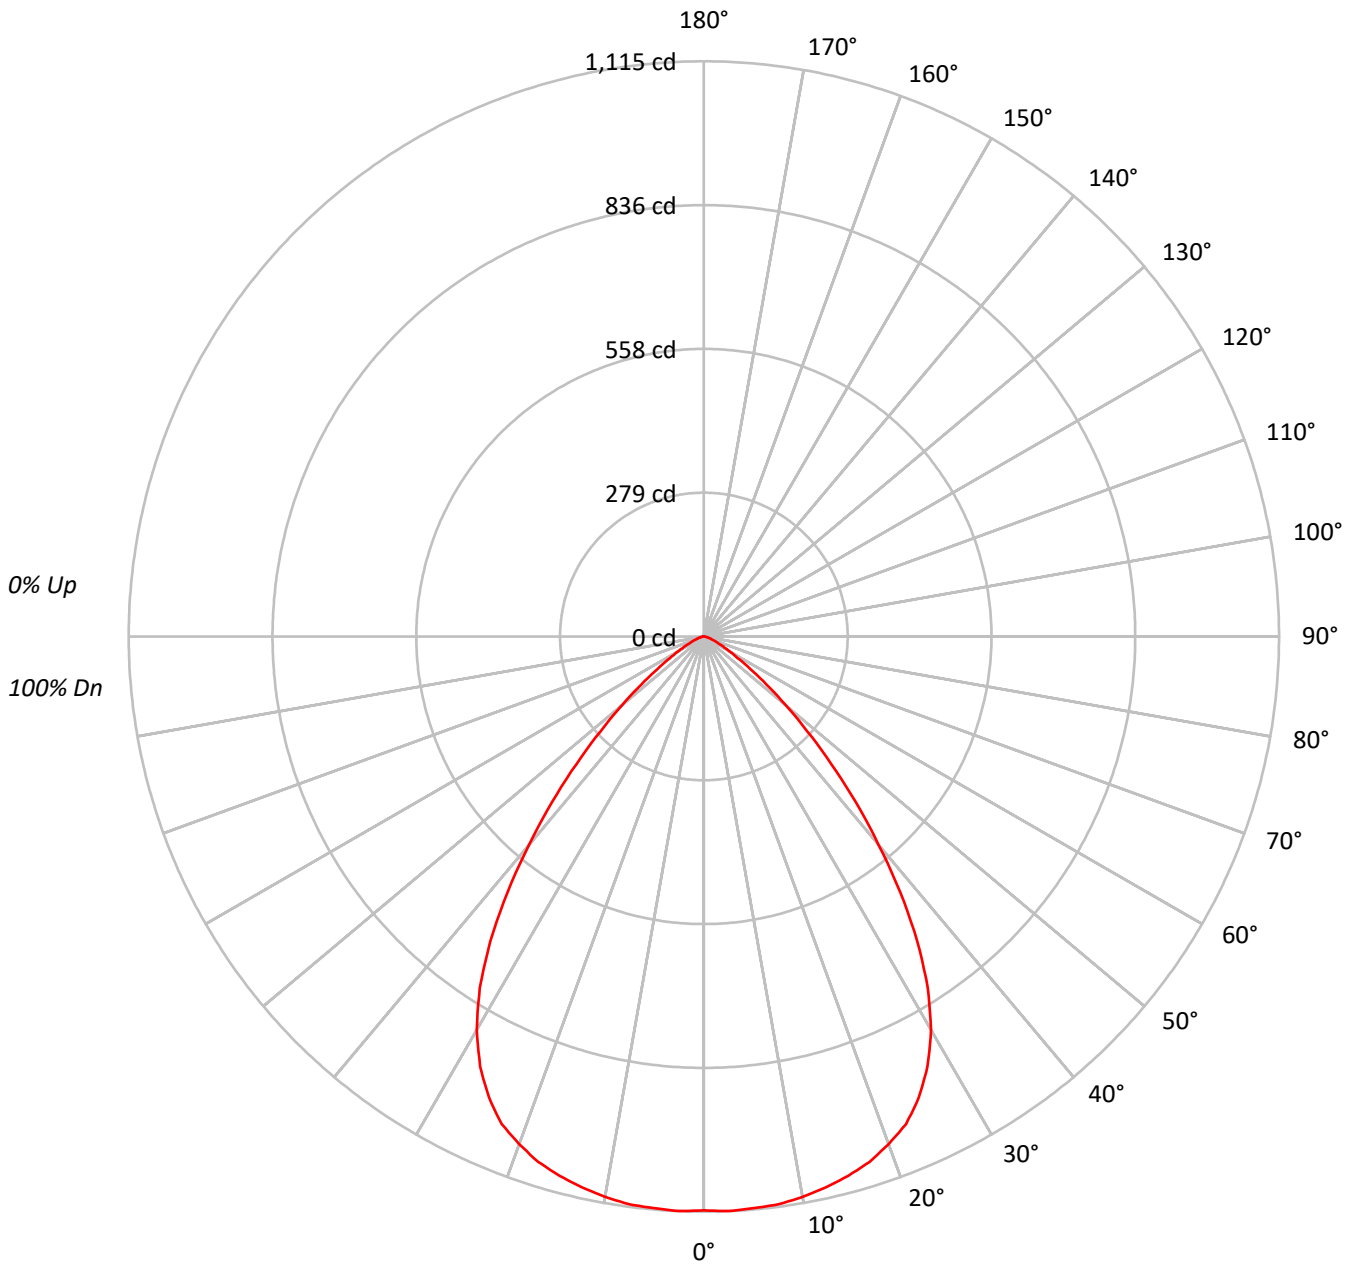



TEST NUMBER: P857218

CATALOG NUMBER: LX4C20D010 EX4C209050 4LBWH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91																			
2	105	100	95	91	103	98	93	90	95	91	88	91	88	86	89	86	84	82																			
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74																			
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67																			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	62	61																			
6	81	71	64	58	80	70	63	58	68	62	58	67	61	57	65	61	57	55																			
7	76	65	58	53	75	65	58	53	63	57	53	62	56	52	61	56	52	50																			
8	72	60	53	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46																			
9	68	56	49	45	66	56	49	45	55	49	44	54	48	44	53	48	44	43																			
10	64	52	46	41	63	52	46	41	51	45	41	50	45	41	49	44	41	39																			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	136674
5°	137197
10°	137610
15°	137617
20°	136870
25°	133656
30°	124921
35°	108178
40°	84517
45°	60636
50°	39391
55°	23582
60°	13809
65°	8866
70°	5891
75°	4462
80°	3325
85°	0



TEST NUMBER: P857218

CATALOG NUMBER: LX4C20D010 EX4C209050 4LBWH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	105.9	6.1
10°-20°	305.3	17.7
20°-30°	450.5	26.1
30°-40°	444.5	25.8
40°-50°	272.0	15.8
50°-60°	104.3	6.0
60°-70°	32.6	1.9
70°-80°	9.6	0.6
80°-90°	1.3	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	861.7	49.9
0°-40°	1306.2	75.7
0°-60°	1682.6	97.5
0°-90°	1726.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1726.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1112	
5°	1112	106
15°	1082	305
25°	986	450
35°	721	445
45°	349	272
55°	110	104
65°	30	33
75°	9	10
85°	0	1
90°	0	



TEST NUMBER: P857218

CATALOG NUMBER: LX4C20D010 EX4C209050 4LBWH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1112.5
2.5°	1114.9
5°	1112.5
7.5°	1110.2
10°	1103.1
12.5°	1093.8
15°	1082.0
17.5°	1068.0
20°	1046.9
22.5°	1023.5
25°	986.0
27.5°	939.1
30°	880.6
32.5°	808.1
35°	721.3
37.5°	625.3
40°	527.0
42.5°	435.6
45°	349.0
47.5°	271.6
50°	206.1
52.5°	152.3
55°	110.1
57.5°	77.3
60°	56.2
62.5°	42.2
65°	30.5
67.5°	23.4
70°	16.4
72.5°	11.7
75°	9.4
77.5°	4.7
80°	4.7
82.5°	2.3
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)