

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857233

Luminaire Tested: **LX4C20D010 EX4C209827 4LBNLI**

Issue Date: 1/21/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P857233  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)  
Test Lab: INNOVATION CENTER  
Issue Date: 1/21/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LX4C20D010 EX4C209827 4LBNLI  
Description:  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1258.4 lumens  
Efficiency: N/A  
Efficacy: 57.7 lumens/watt  
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 21.8  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P857233

CATALOG NUMBER: LX4C20D010 EX4C209827 4LBNLI

### Luminous Intensity Polar Plot

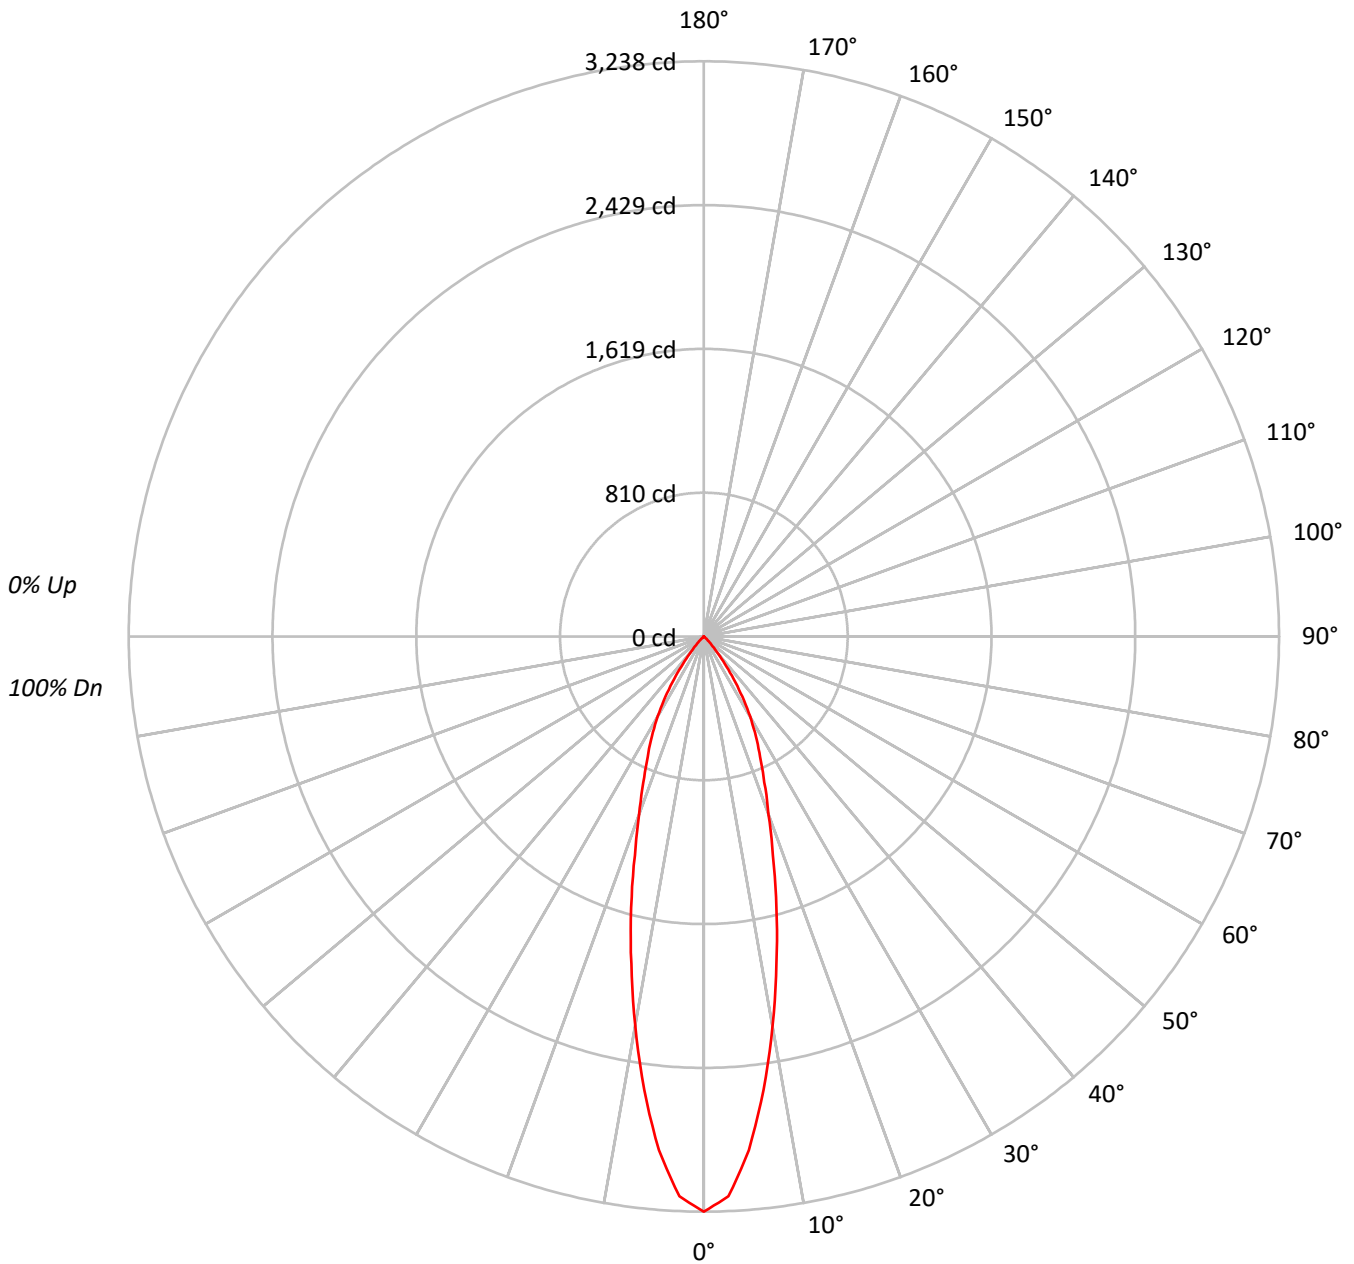



TEST NUMBER: P857233

CATALOG NUMBER: LX4C20D010 EX4C209827 4LBNI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	92	90	90	90	90
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85	85	85	85
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81	81	81	81
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77	77	77	77
6	92	85	80	76	91	84	79	76	83	78	75	81	78	75	80	77	74	73	73	73	73
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	69	69	69	69
8	85	77	72	68	84	77	72	68	76	71	68	75	71	68	74	70	67	66	66	66	66
9	82	74	69	65	81	73	68	65	72	68	65	72	68	65	71	67	64	63	63	63	63
10	79	71	66	62	78	70	65	62	69	65	62	69	65	62	68	64	62	61	61	61	61

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	397800
5°	357981
10°	277503
15°	200867
20°	139079
25°	101394
30°	73682
35°	43598
40°	18331
45°	5716
50°	745
55°	428
60°	491
65°	581
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P857233

CATALOG NUMBER: LX4C20D010 EX4C209827 4LBNLI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	255.2	20.3
10°-20°	436.9	34.7
20°-30°	347.2	27.6
30°-40°	183.8	14.6
40°-50°	31.7	2.5
50°-60°	2.4	0.2
60°-70°	1.2	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1039.2	82.6
0°-40°	1223.1	97.2
0°-60°	1257.1	99.9
0°-90°	1258.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1258.4	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3238	
5°	2903	255
15°	1579	437
25°	748	347
35°	291	184
45°	33	32
55°	2	2
65°	2	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P857233

CATALOG NUMBER: LX4C20D010 EX4C209827 4LBNLI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3238.0
2.5°	3154.6
5°	2902.8
7.5°	2573.4
10°	2224.5
12.5°	1887.4
15°	1579.3
17.5°	1292.5
20°	1063.8
22.5°	889.4
25°	748.0
27.5°	633.7
30°	519.4
32.5°	403.1
35°	290.7
37.5°	191.9
40°	114.3
42.5°	65.9
45°	32.9
47.5°	11.7
50°	3.9
52.5°	3.9
55°	2.0
57.5°	2.0
60°	2.0
62.5°	2.0
65°	2.0
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)