

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857244

Luminaire Tested: **LX4C20D010 EX4C209830 4LBMLI**

Issue Date: 1/26/2022



Test Information

Test Method: LM-79-08
Report Number: P857244
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)
Test Lab: INNOVATION CENTER
Issue Date: 1/26/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C20D010 EX4C209830 4LBMLI
Description:
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1666.7 lumens
Efficiency: N/A
Efficacy: 76.5 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 21.8
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P857244

CATALOG NUMBER: LX4C20D010 EX4C209830 4LBMLI

Luminous Intensity Polar Plot

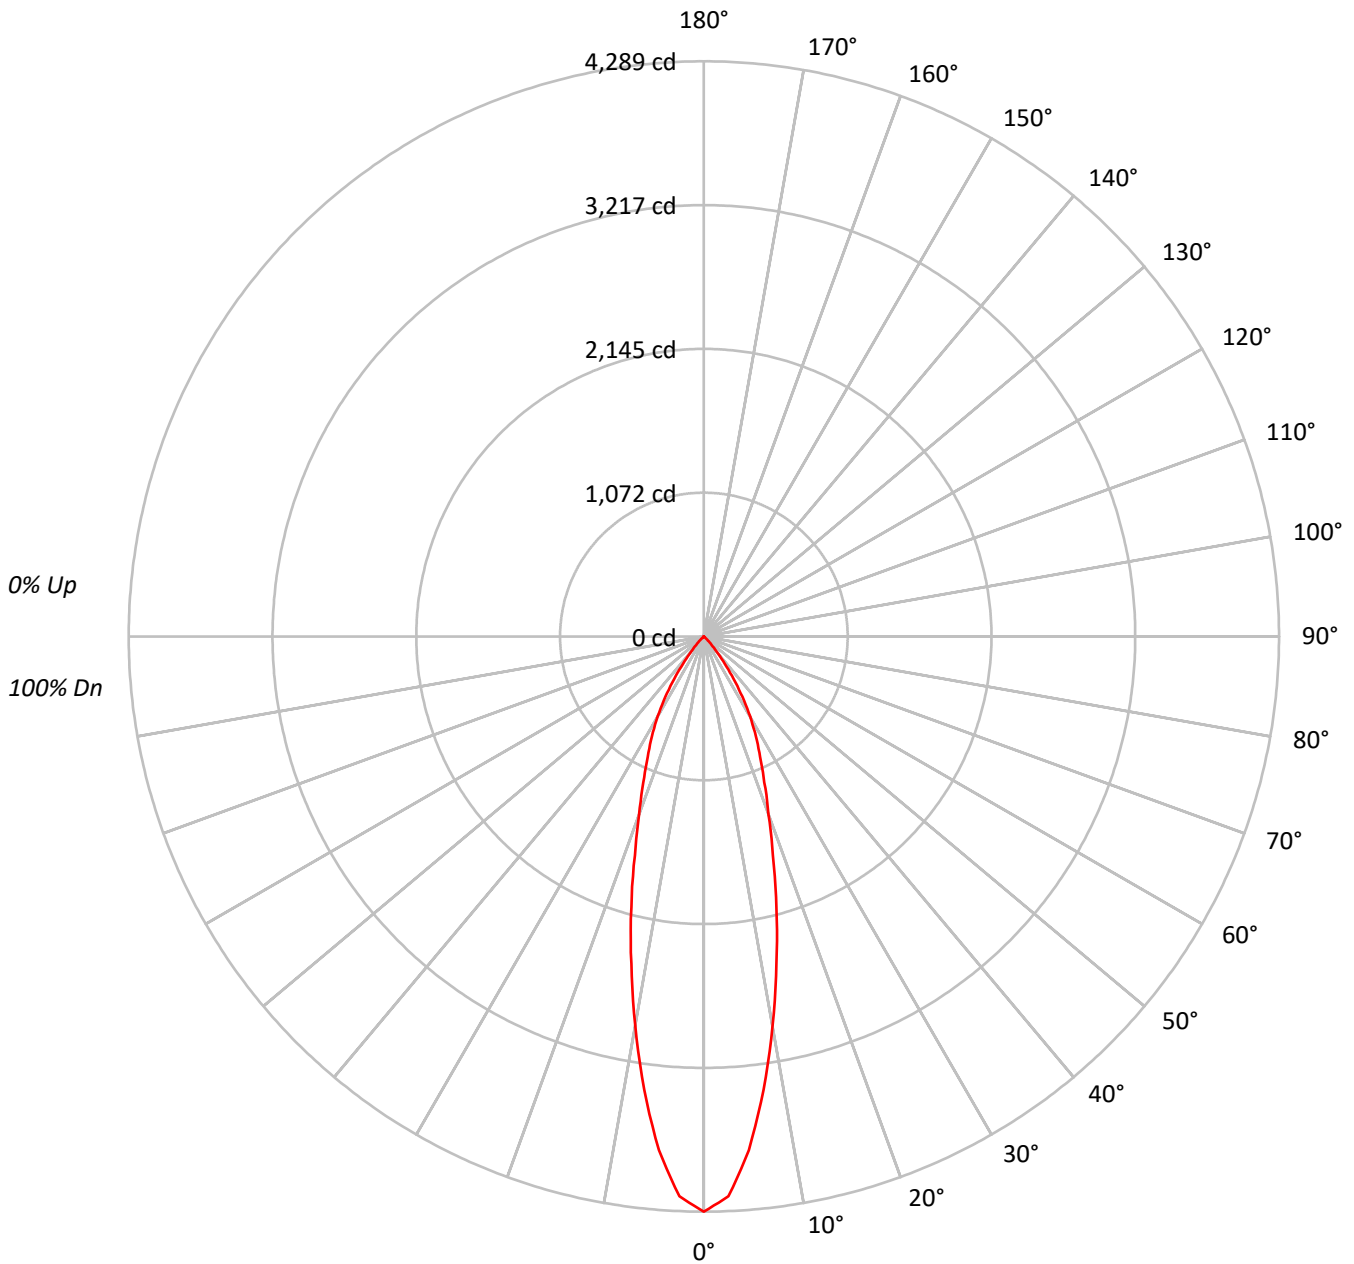



TEST NUMBER: P857244

CATALOG NUMBER: LX4C20D010 EX4C209830 4LBMLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100																
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95			95																
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	92	90			90																
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85			85																
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81			81																
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77			77																
6	92	85	80	76	91	84	79	76	83	78	75	81	78	75	80	77	74	73			73																
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	69			69																
8	85	77	72	68	84	77	72	68	76	71	68	75	71	68	74	70	67	66			66																
9	82	74	69	65	81	73	68	65	72	68	65	72	68	65	71	67	64	63			63																
10	79	71	66	62	78	70	65	62	69	65	62	69	65	62	68	64	62	61			61																

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	526919
5°	474176
10°	367597
15°	266050
20°	184223
25°	134307
30°	97585
35°	57756
40°	24281
45°	7575
50°	994
55°	557
60°	639
65°	756
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P857244

CATALOG NUMBER: LX4C20D010 EX4C209830 4LBMLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	338.0	20.3
10°-20°	578.7	34.7
20°-30°	459.9	27.6
30°-40°	243.5	14.6
40°-50°	41.9	2.5
50°-60°	3.2	0.2
60°-70°	1.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1376.5	82.6
0°-40°	1620.0	97.2
0°-60°	1665.1	99.9
0°-90°	1666.7	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1666.7	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	4289	
5°	3845	338
15°	2092	579
25°	991	460
35°	385	243
45°	44	42
55°	3	3
65°	3	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P857244

CATALOG NUMBER: LX4C20D010 EX4C209830 4LBMLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	4289.0
2.5°	4178.6
5°	3845.0
7.5°	3408.7
10°	2946.7
12.5°	2500.0
15°	2091.8
17.5°	1712.0
20°	1409.1
22.5°	1178.1
25°	990.8
27.5°	839.3
30°	687.9
32.5°	533.9
35°	385.1
37.5°	254.1
40°	151.4
42.5°	87.3
45°	43.6
47.5°	15.4
50°	5.2
52.5°	5.2
55°	2.6
57.5°	2.6
60°	2.6
62.5°	2.6
65°	2.6
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)