

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857245

Luminaire Tested: **LX4C20D010 EX4C209830 4LBNH**

Issue Date: 2/8/2022



Test Information

Test Method: LM-79-08
Report Number: P857245
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207666)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C20D010 EX4C209830 4LBNH
Description:
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1110.2 lumens
Efficiency: N/A
Efficacy: 50.9 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 21.8
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P857245

CATALOG NUMBER: LX4C20D010 EX4C209830 4LBNH

Luminous Intensity Polar Plot

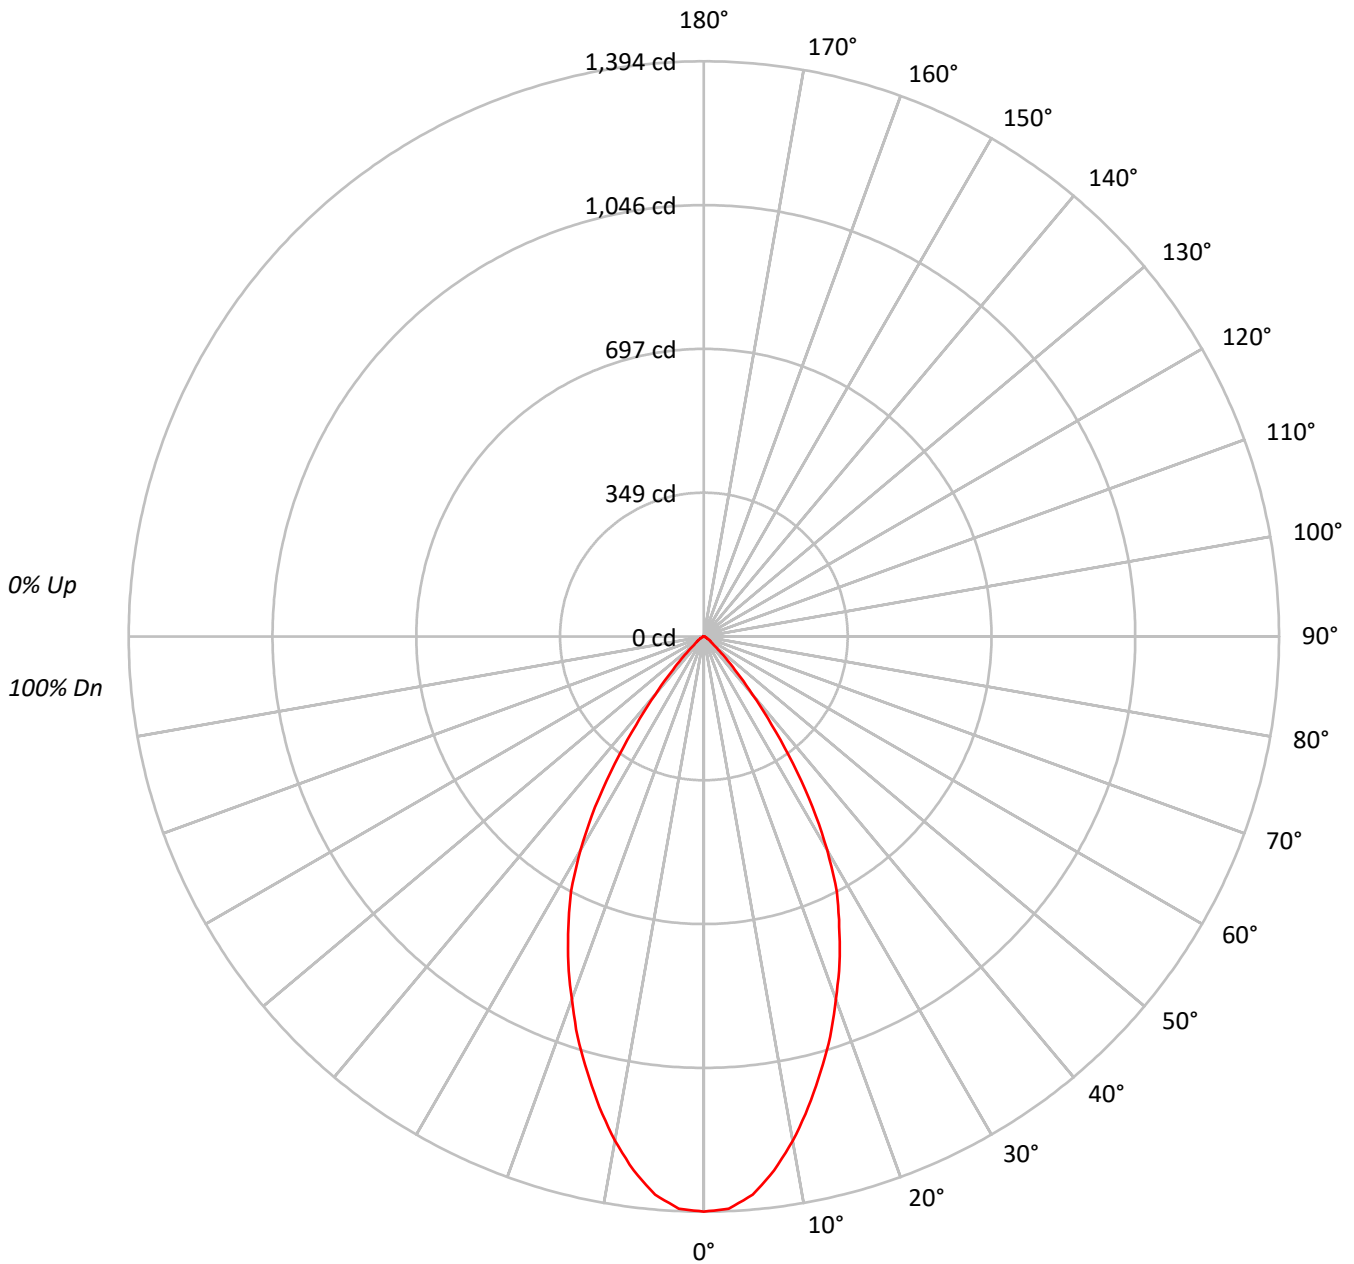



TEST NUMBER: P857245

CATALOG NUMBER: LX4C20D010 EX4C209830 4LBNH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70			
6	88	79	73	69	86	78	72	68	76	72	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61			
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58			
9	76	66	60	56	74	65	60	56	65	59	56	64	59	56	63	59	55	54			
10	72	62	57	53	71	62	56	53	61	56	53	60	56	52	60	55	52	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	171258
5°	167435
10°	154813
15°	138914
20°	122279
25°	105244
30°	84747
35°	56406
40°	29348
45°	13274
50°	5753
55°	3877
60°	2482
65°	1773
70°	1437
75°	997
80°	0
85°	0



TEST NUMBER: P857245

CATALOG NUMBER: LX4C20D010 EX4C209830 4LBNH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	125.8	11.3
10°-20°	305.1	27.5
20°-30°	354.2	31.9
30°-40°	234.6	21.1
40°-50°	65.8	5.9
50°-60°	16.5	1.5
60°-70°	6.2	0.6
70°-80°	2.2	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	785.0	70.7
0°-40°	1019.6	91.8
0°-60°	1101.8	99.2
0°-90°	1110.2	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1110.2	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	1394	
5°	1358	126
15°	1092	305
25°	776	354
35°	376	235
45°	76	66
55°	18	17
65°	6	6
75°	2	2
85°	0	0
90°	0	



TEST NUMBER: P857245

CATALOG NUMBER: LX4C20D010 EX4C209830 4LBNH

CANDELA DISTRIBUTION (FULL):

	0°
0°	1394.0
2.5°	1387.9
5°	1357.7
7.5°	1305.3
10°	1241.0
12.5°	1168.5
15°	1092.2
17.5°	1017.7
20°	935.3
22.5°	858.8
25°	776.4
27.5°	698.0
30°	597.4
32.5°	490.8
35°	376.1
37.5°	269.6
40°	183.0
42.5°	118.6
45°	76.4
47.5°	46.3
50°	30.1
52.5°	22.1
55°	18.1
57.5°	14.1
60°	10.1
62.5°	8.0
65°	6.1
67.5°	4.0
70°	4.0
72.5°	2.1
75°	2.1
77.5°	2.1
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)