

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857326

Luminaire Tested: **LD4C02D010 EU4029050 4LBMLI**

Issue Date: 7/19/2024



**Test Information**

Test Method: LM-79-08  
Report Number: P857326  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208178)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/19/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD4C02D010 EU4029050 4LBMLI  
Description: 4 INCH 250 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS AND 4LBM TRIM WITH LI FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 320.0 lumens  
Efficiency: N/A  
Efficacy: 91.4 lumens/watt  
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.76  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 3.5  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P857326

CATALOG NUMBER: LD4C02D010 EU4029050 4LBMLI

### Luminous Intensity Polar Plot

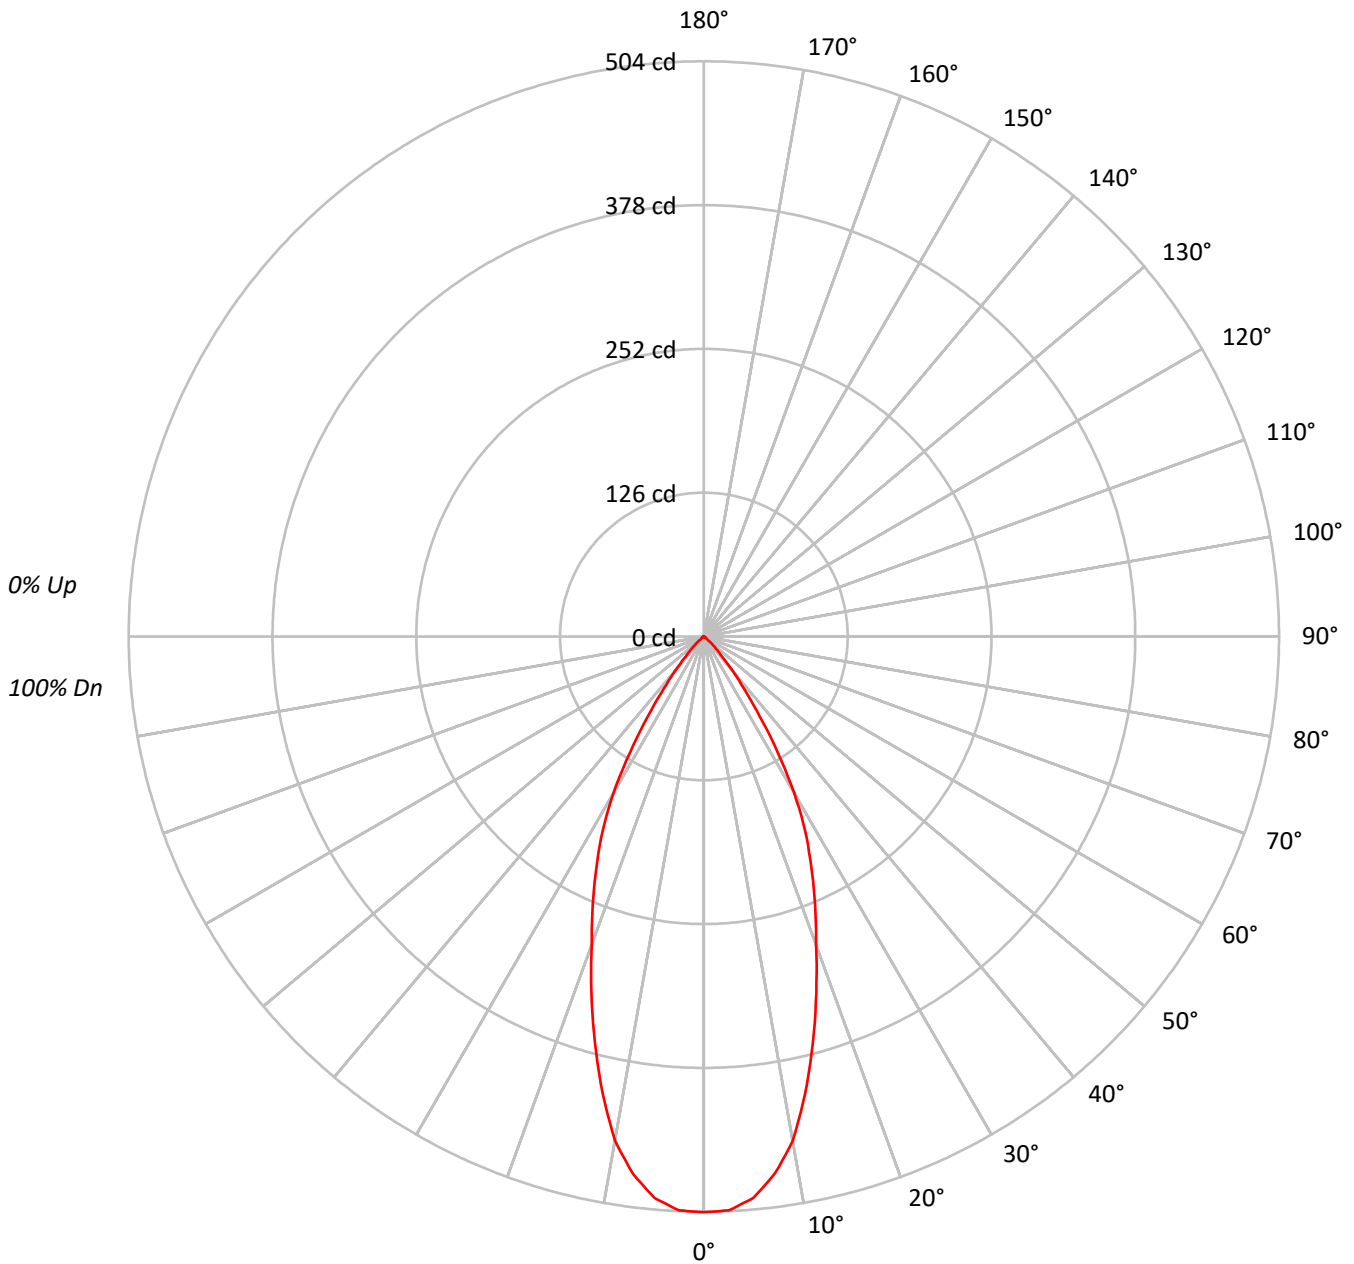



TEST NUMBER: P857326

CATALOG NUMBER: LD4C02D010 EU4029050 4LBMLI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	109	104	100	97	107	102	99	96	99	96	94	96	94	92	94	92	90	88			
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83			
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	79	78			
5	94	87	81	77	93	86	81	77	84	79	76	82	78	75	81	77	75	73			
6	90	82	76	72	89	81	76	72	80	75	71	78	74	71	77	73	70	69			
7	86	77	72	68	85	77	71	68	75	71	67	74	70	67	73	69	67	65			
8	82	73	68	64	81	73	67	64	72	67	64	71	66	63	70	66	63	62			
9	79	70	64	60	78	69	64	60	68	63	60	67	63	60	67	63	60	58			
10	75	66	61	57	74	66	61	57	65	60	57	64	60	57	64	60	57	56			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	61980
5°	60921
10°	55975
15°	46881
20°	37561
25°	30174
30°	22470
35°	12838
40°	6030
45°	2554
50°	822
55°	407
60°	295
65°	233
70°	144
75°	0
80°	0
85°	0



TEST NUMBER: P857326

CATALOG NUMBER: LD4C02D010 EU4029050 4LBMLI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	45.7	14.3
10°-20°	102.1	31.9
20°-30°	101.5	31.7
30°-40°	55.3	17.3
40°-50°	12.8	4.0
50°-60°	1.8	0.6
60°-70°	0.7	0.2
70°-80°	0.2	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	249.3	77.9
0°-40°	304.6	95.2
0°-60°	319.2	99.7
0°-90°	320.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	320.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	504	
5°	494	46
15°	369	102
25°	223	102
35°	86	55
45°	15	13
55°	2	2
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P857326

CATALOG NUMBER: LD4C02D010 EU4029050 4LBMLI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	504.5
2.5°	503.3
5°	494.0
7.5°	475.0
10°	448.7
12.5°	410.0
15°	368.6
17.5°	327.5
20°	287.3
22.5°	254.4
25°	222.6
27.5°	192.4
30°	158.4
32.5°	120.4
35°	85.6
37.5°	57.7
40°	37.6
42.5°	23.6
45°	14.7
47.5°	8.5
50°	4.3
52.5°	2.3
55°	1.9
57.5°	1.2
60°	1.2
62.5°	0.8
65°	0.8
67.5°	0.4
70°	0.4
72.5°	0.4
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)