

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857334

Luminaire Tested: **LD4C25D010 EU4259027 4LBMLI**

Issue Date: 7/19/2024



**Test Information**

Test Method: LM-79-08  
Report Number: P857334  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208178)  
Test Lab: INNOVATION CENTER  
Issue Date: 7/19/2024  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD4C25D010 EU4259027 4LBMLI  
Description: 4 INCH 2500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2700K, 90CRI LEDS  
AND 4LBM TRIM WITH LI FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 2258.0 lumens  
Efficiency: N/A  
Efficacy: 71.7 lumens/watt  
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.76  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 31.5  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P857334

CATALOG NUMBER: LD4C25D010 EU4259027 4LBMLI

### Luminous Intensity Polar Plot

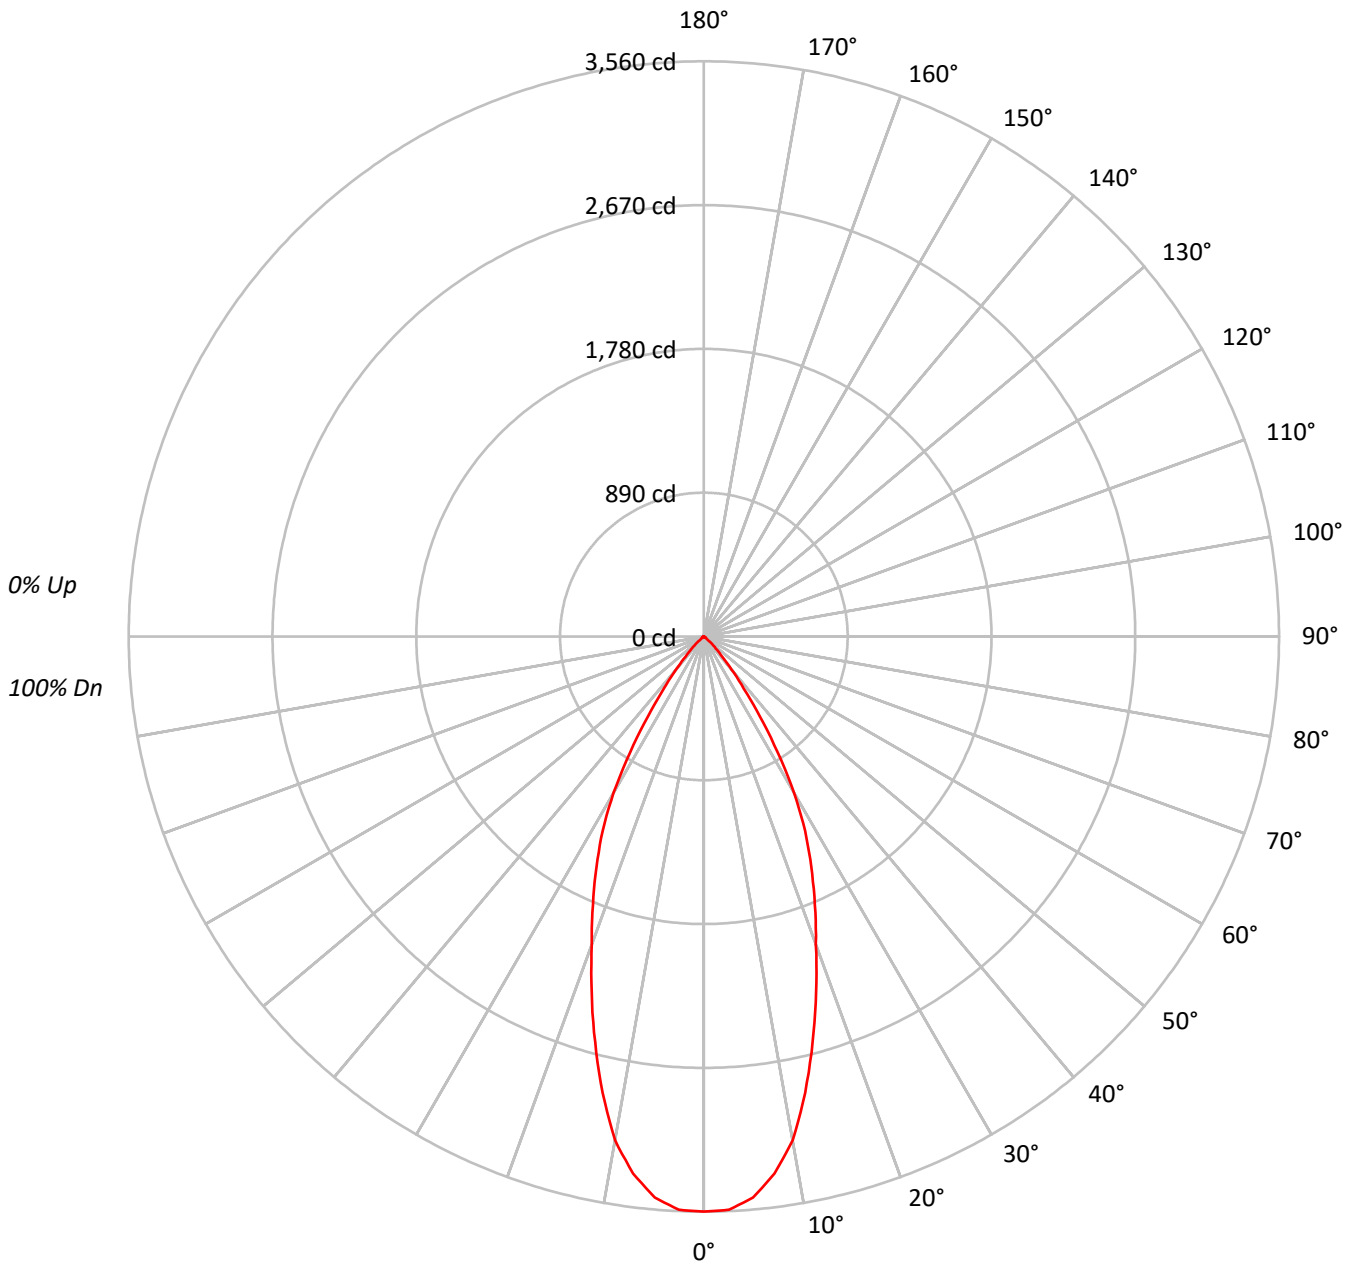



TEST NUMBER: P857334

CATALOG NUMBER: LD4C25D010 EU4259027 4LBMLI

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	109	104	100	97	107	102	99	96	99	96	94	96	94	92	94	92	90	88			
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83			
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	79	78			
5	94	87	81	77	93	86	81	77	84	79	76	82	78	75	81	77	75	73			
6	90	82	76	72	89	81	76	72	80	75	71	78	74	71	77	73	71	69			
7	86	77	72	68	85	77	71	68	75	71	67	74	70	67	73	69	67	65			
8	82	73	68	64	81	73	67	64	72	67	64	71	66	63	70	66	63	62			
9	79	70	64	60	78	69	64	60	68	63	60	67	63	60	67	63	60	58			
10	75	66	61	57	74	66	61	57	65	60	57	64	60	57	64	60	57	56			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	437309
5°	429878
10°	394992
15°	330776
20°	265006
25°	212928
30°	158513
35°	90556
40°	42499
45°	18052
50°	5753
55°	2934
60°	2015
65°	1599
70°	970
75°	0
80°	0
85°	0



TEST NUMBER: P857334

CATALOG NUMBER: LD4C25D010 EU4259027 4LBMLI

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	322.3	14.3
10°-20°	720.5	31.9
20°-30°	716.4	31.7
30°-40°	390.1	17.3
40°-50°	90.2	4.0
50°-60°	12.7	0.6
60°-70°	4.7	0.2
70°-80°	1.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1759.2	77.9
0°-40°	2149.3	95.2
0°-60°	2252.2	99.7
0°-90°	2258.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2258.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3560	
5°	3486	322
15°	2601	721
25°	1571	716
35°	604	390
45°	104	90
55°	14	13
65°	6	5
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P857334

CATALOG NUMBER: LD4C25D010 EU4259027 4LBMLI

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3559.6
2.5°	3551.4
5°	3485.8
7.5°	3352.0
10°	3166.3
12.5°	2893.1
15°	2600.7
17.5°	2311.2
20°	2027.0
22.5°	1794.8
25°	1570.8
27.5°	1357.8
30°	1117.4
32.5°	849.6
35°	603.8
37.5°	407.0
40°	265.0
42.5°	166.6
45°	103.9
47.5°	60.1
50°	30.1
52.5°	16.4
55°	13.7
57.5°	8.2
60°	8.2
62.5°	5.5
65°	5.5
67.5°	2.7
70°	2.7
72.5°	2.7
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)