

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857355

Luminaire Tested: **LD4C25D010 EU4259030 4LBMLI**

Issue Date: 7/19/2024



Test Information

Test Method: LM-79-08
Report Number: P857355
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208178)
Test Lab: INNOVATION CENTER
Issue Date: 7/19/2024
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C25D010 EU4259030 4LBMLI
Description: 4 INCH 2500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS
AND 4LBM TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2348.0 lumens
Efficiency: N/A
Efficacy: 74.5 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.76
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 31.5
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P857355

CATALOG NUMBER: LD4C25D010 EU4259030 4LBMLI

Luminous Intensity Polar Plot

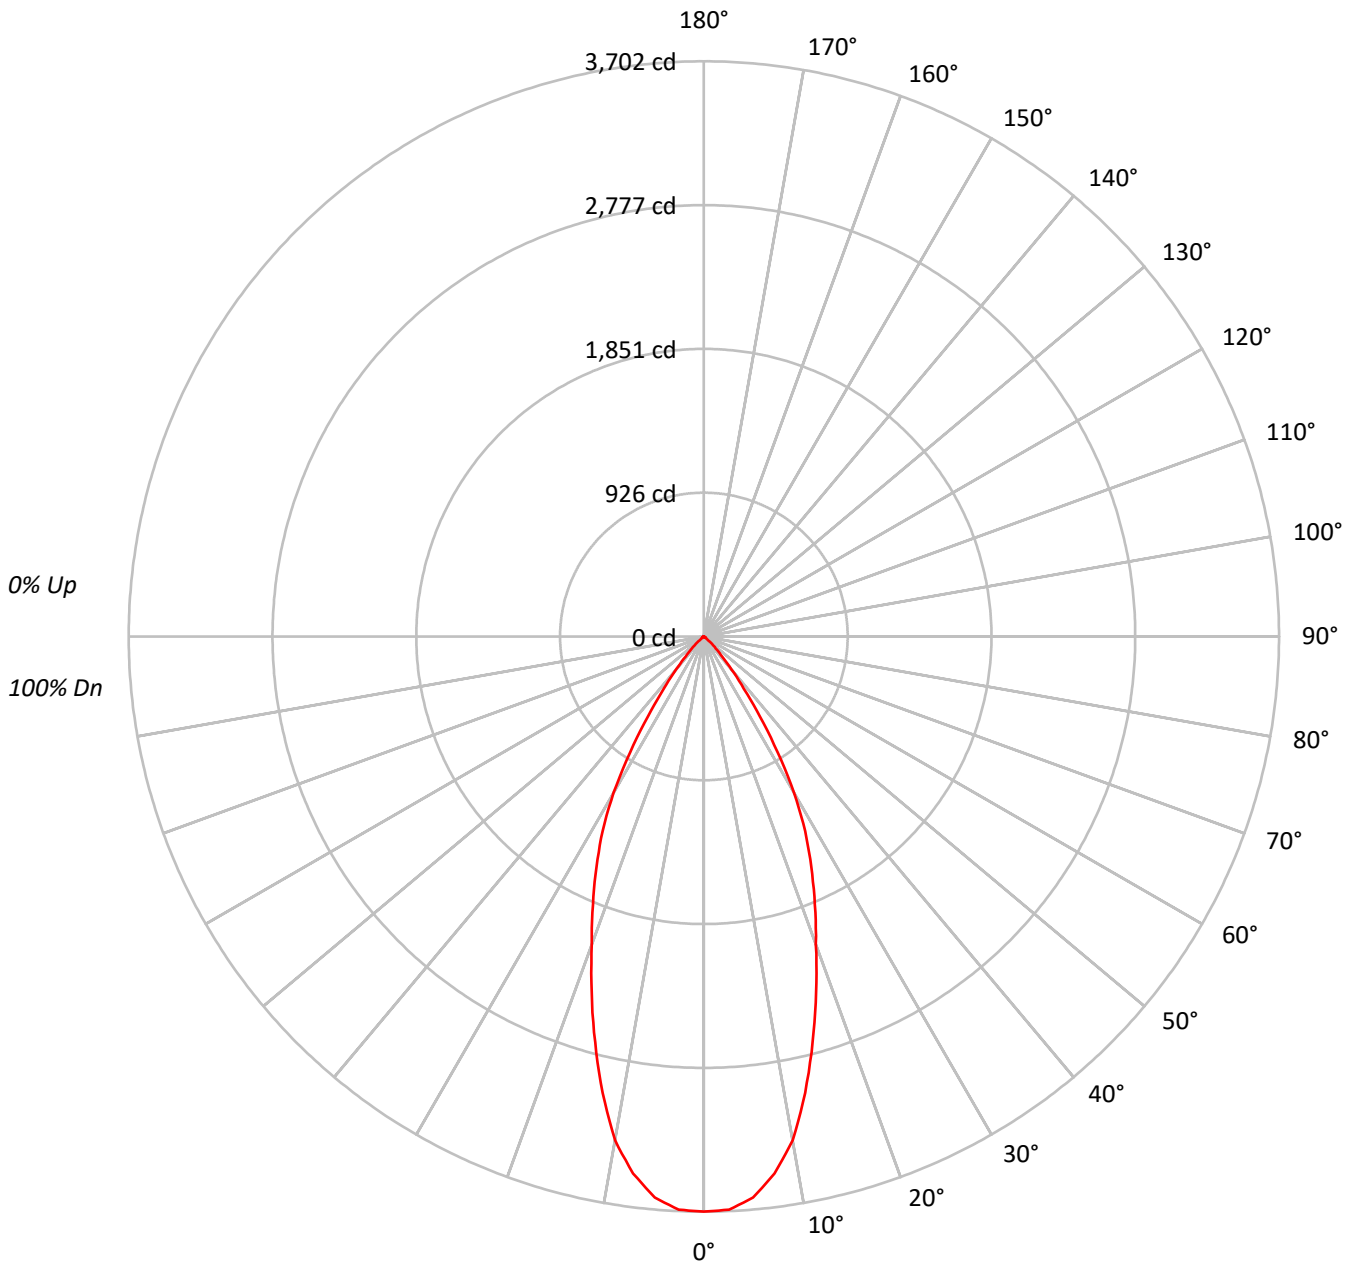



TEST NUMBER: P857355

CATALOG NUMBER: LD4C25D010 EU4259030 4LBMLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	109	104	100	97	107	102	99	96	99	96	94	96	94	92	94	92	90	88			
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83			
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	79	78			
5	94	87	81	77	93	86	81	77	84	79	76	82	78	75	81	77	75	73			
6	90	82	76	72	89	81	76	72	80	75	71	78	74	71	77	73	71	69			
7	86	77	72	68	85	77	71	68	75	71	67	74	70	67	73	69	67	65			
8	82	73	68	64	81	73	67	64	72	67	64	71	66	63	70	66	63	62			
9	79	70	64	60	78	69	64	60	68	63	60	67	63	60	67	63	60	58			
10	75	66	61	57	74	66	61	57	65	60	57	64	60	57	64	60	57	56			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	454742
5°	447008
10°	410735
15°	343965
20°	275569
25°	221414
30°	164826
35°	94170
40°	44199
45°	18764
50°	5982
55°	3041
60°	2089
65°	1657
70°	1006
75°	0
80°	0
85°	0



TEST NUMBER: P857355

CATALOG NUMBER: LD4C25D010 EU4259030 4LBMLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	335.1	14.3
10°-20°	749.3	31.9
20°-30°	744.9	31.7
30°-40°	405.7	17.3
40°-50°	93.8	4.0
50°-60°	13.2	0.6
60°-70°	4.9	0.2
70°-80°	1.1	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1829.3	77.9
0°-40°	2235.0	95.2
0°-60°	2342.0	99.7
0°-90°	2348.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2348.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3702	
5°	3625	335
15°	2704	749
25°	1633	745
35°	628	406
45°	108	94
55°	14	13
65°	6	5
75°	0	1
85°	0	0
90°	0	



TEST NUMBER: P857355

CATALOG NUMBER: LD4C25D010 EU4259030 4LBMLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	3701.5
2.5°	3692.9
5°	3624.7
7.5°	3485.6
10°	3292.5
12.5°	3008.4
15°	2704.4
17.5°	2403.3
20°	2107.8
22.5°	1866.4
25°	1633.4
27.5°	1411.9
30°	1161.9
32.5°	883.5
35°	627.9
37.5°	423.2
40°	275.6
42.5°	173.2
45°	108.0
47.5°	62.5
50°	31.3
52.5°	17.1
55°	14.2
57.5°	8.5
60°	8.5
62.5°	5.7
65°	5.7
67.5°	2.8
70°	2.8
72.5°	2.8
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)