

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P857496

Luminaire Tested: **LX4C25D010 EX4C259850 4LBNH**

Issue Date: 2/8/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P857496  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207666)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/8/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LX4C25D010 EX4C259850 4LBNH  
Description:  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1445.5 lumens  
Efficiency: N/A  
Efficacy: 45.9 lumens/watt  
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 31.5  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P857496

CATALOG NUMBER: LX4C25D010 EX4C259850 4LBNH

### Luminous Intensity Polar Plot

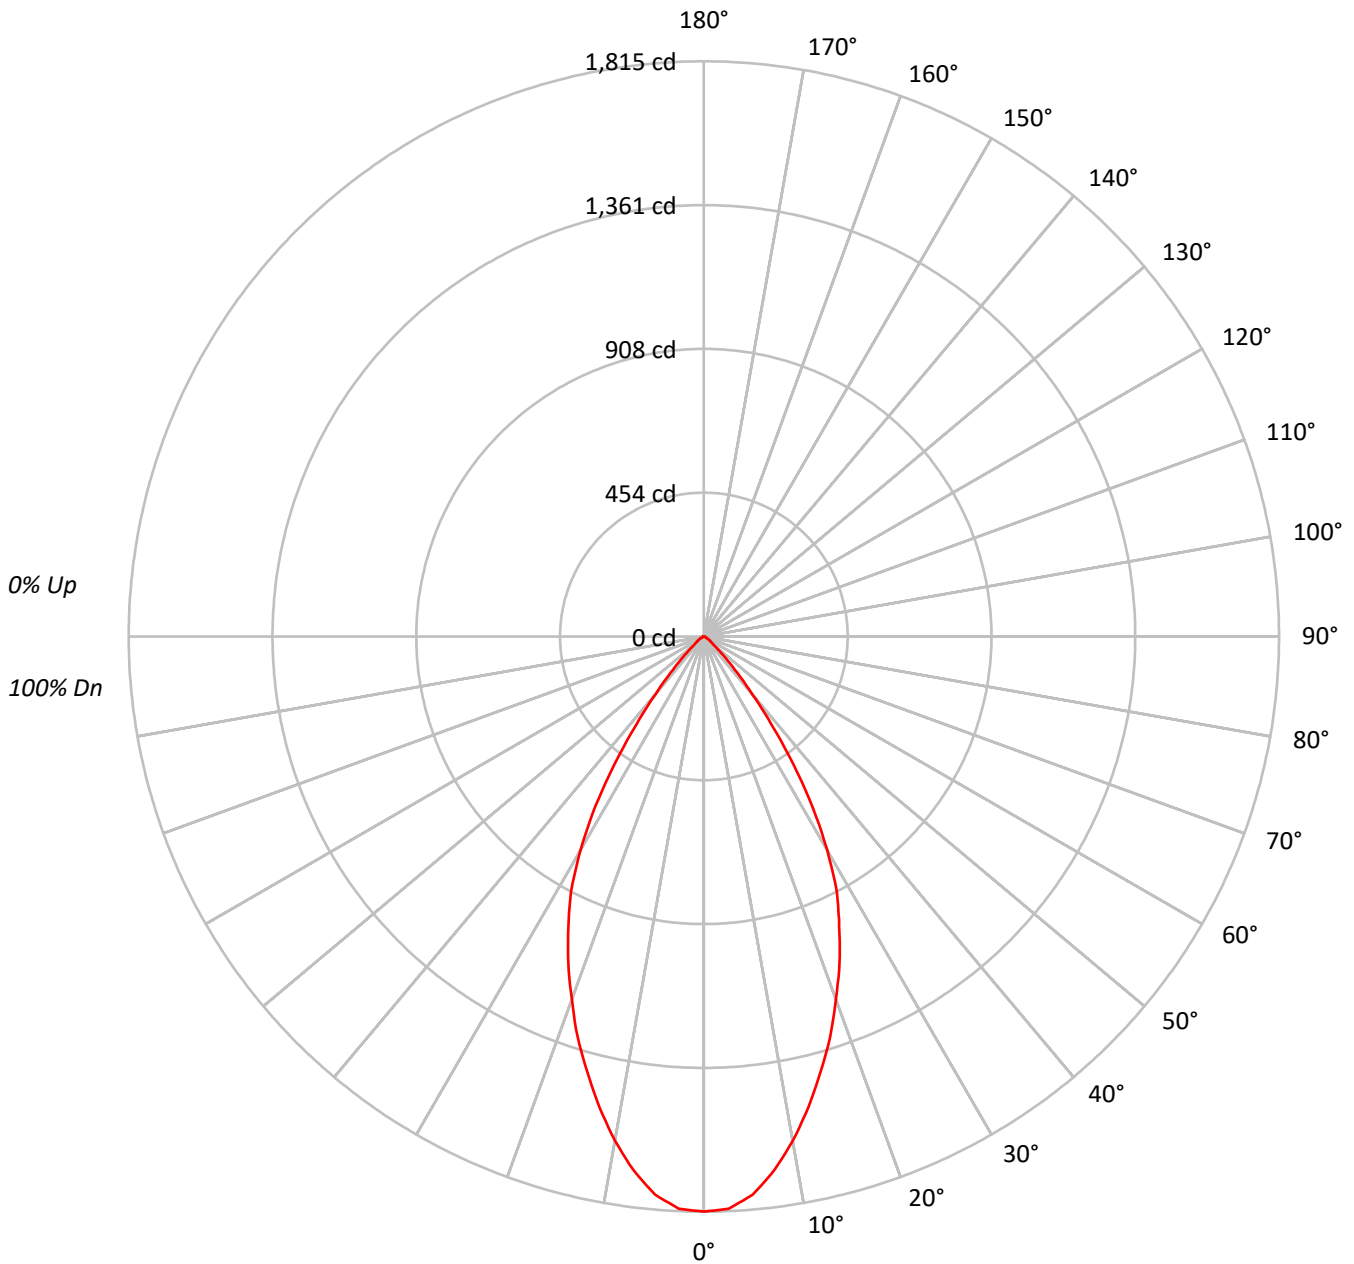



TEST NUMBER: P857496

CATALOG NUMBER: LX4C25D010 EX4C259850 4LBNH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70			
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61			
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58			
9	76	66	60	56	74	65	60	56	65	59	56	64	59	56	63	59	55	54			
10	72	62	57	53	71	62	56	53	61	56	53	60	56	52	60	55	52	51			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	222967
5°	218010
10°	201569
15°	180873
20°	159226
25°	137018
30°	110338
35°	73443
40°	38217
45°	17287
50°	7492
55°	5033
60°	3219
65°	2267
70°	1904
75°	1234
80°	0
85°	0



TEST NUMBER: P857496

CATALOG NUMBER: LX4C25D010 EX4C259850 4LBNH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	163.7	11.3
10°-20°	397.2	27.5
20°-30°	461.1	31.9
30°-40°	305.4	21.1
40°-50°	85.6	5.9
50°-60°	21.5	1.5
60°-70°	8.1	0.6
70°-80°	2.8	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1022.1	70.7
0°-40°	1327.5	91.8
0°-60°	1434.6	99.3
0°-90°	1445.5	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1445.5	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1815	
5°	1768	164
15°	1422	397
25°	1011	461
35°	490	305
45°	100	86
55°	24	22
65°	8	8
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P857496

CATALOG NUMBER: LX4C25D010 EX4C259850 4LBNH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1814.9
2.5°	1807.0
5°	1767.8
7.5°	1699.6
10°	1615.8
12.5°	1521.5
15°	1422.1
17.5°	1325.1
20°	1217.9
22.5°	1118.2
25°	1010.8
27.5°	908.8
30°	777.8
32.5°	639.0
35°	489.7
37.5°	351.0
40°	238.3
42.5°	154.4
45°	99.5
47.5°	60.3
50°	39.2
52.5°	28.8
55°	23.5
57.5°	18.4
60°	13.1
62.5°	10.5
65°	7.8
67.5°	5.3
70°	5.3
72.5°	2.6
75°	2.6
77.5°	2.6
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)