

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P858247

Luminaire Tested: **LX4C45D010 EX4C459840 4LBMDH**

Issue Date: 2/18/2022



Test Information

Test Method: LM-79-08
Report Number: P858247
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-9)
Test Lab: INNOVATION CENTER
Issue Date: 2/18/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C45D010 EX4C459840 4LBMDH
Description:
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 2999.8 lumens
Efficiency: N/A
Efficacy: 60.5 lumens/watt
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.83
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 49.6
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P858247

CATALOG NUMBER: LX4C45D010 EX4C459840 4LBMDH

Luminous Intensity Polar Plot

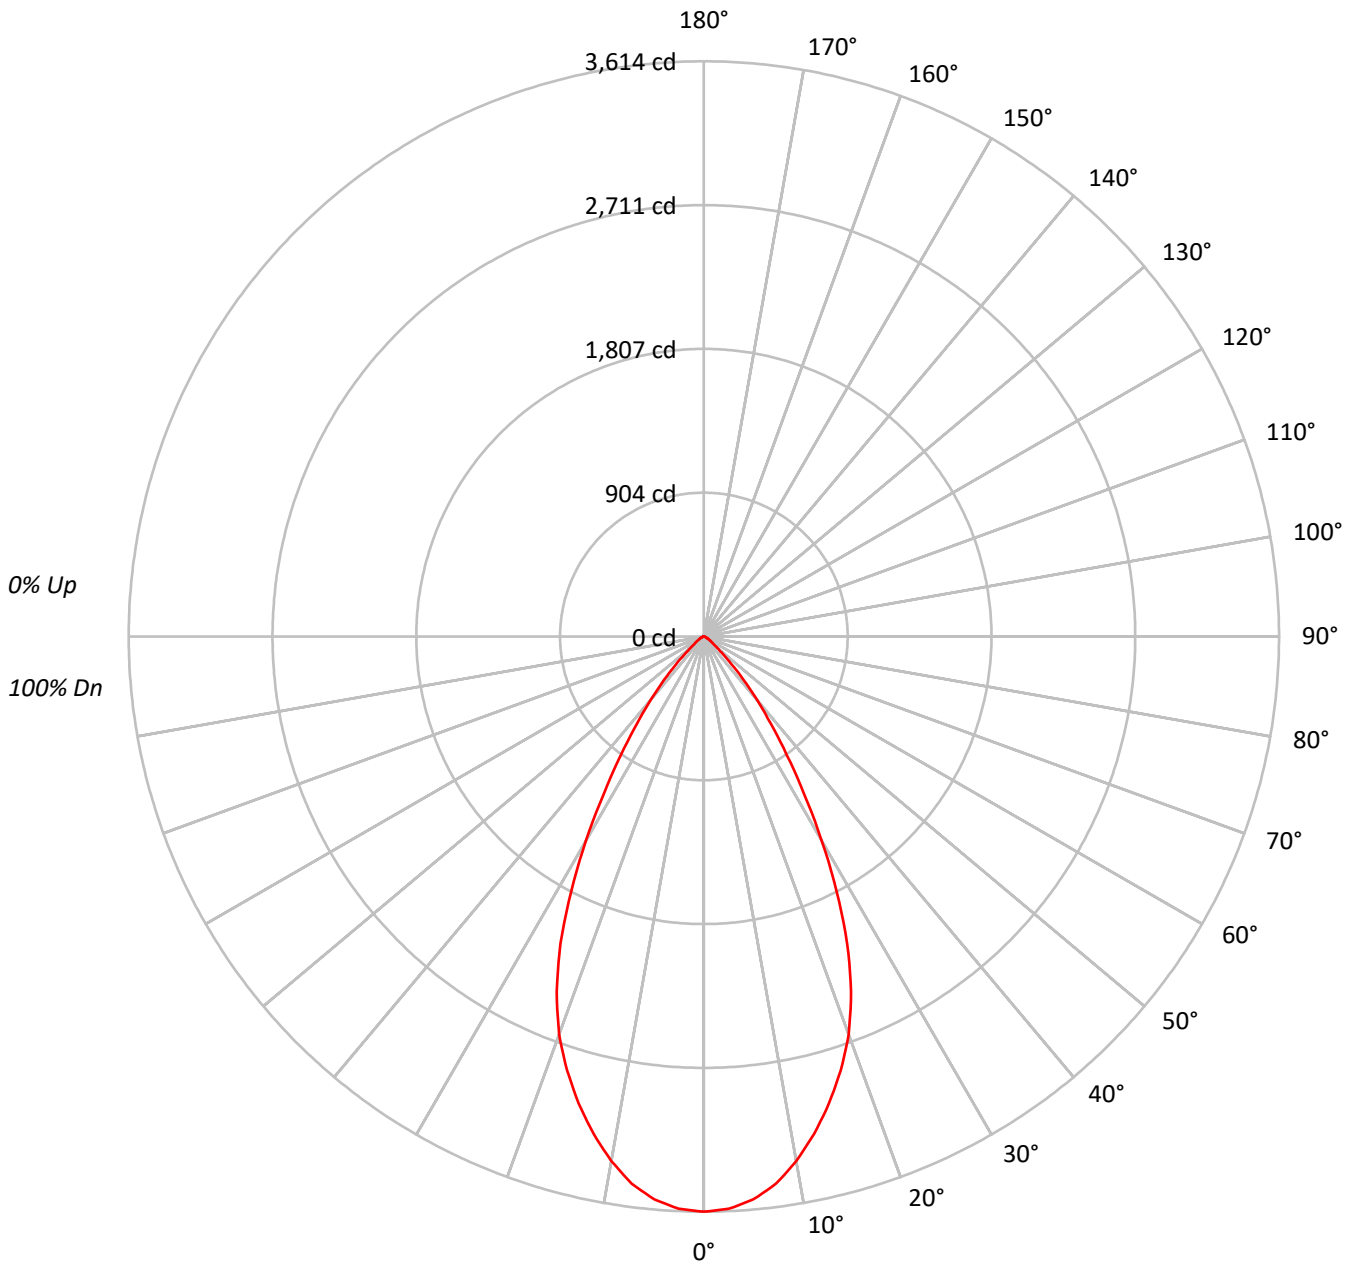



TEST NUMBER: P858247

CATALOG NUMBER: LX4C45D010 EX4C459840 4LBMDH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20			
RC	80				70				50				30				10		0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10
RCR																				
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100		
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93		
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87		
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	81		
4	97	90	84	80	95	88	83	79	86	82	78	84	80	77	82	79	77	75		
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70		
6	88	79	73	68	86	78	72	68	76	71	68	75	71	67	74	70	67	65		
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61		
8	79	70	64	60	78	69	63	60	68	63	59	67	62	59	66	62	59	57		
9	76	66	60	56	74	65	60	56	64	59	56	64	59	56	63	58	55	54		
10	72	62	57	53	71	62	56	53	61	56	53	60	56	52	60	55	52	51		

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	443980
5°	437981
10°	417447
15°	386280
20°	347724
25°	288879
30°	209994
35°	136119
40°	82368
45°	42445
50°	19227
55°	11566
60°	7764
65°	5552
70°	4167
75°	2753
80°	1769
85°	1128



TEST NUMBER: P858247

CATALOG NUMBER: LX4C45D010 EX4C459840 4LBMDH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	332.5	11.1
10°-20°	847.5	28.3
20°-30°	958.3	31.9
30°-40°	579.2	19.3
40°-50°	202.8	6.8
50°-60°	51.9	1.7
60°-70°	19.9	0.7
70°-80°	6.7	0.2
80°-90°	1.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2138.3	71.3
0°-40°	2717.5	90.6
0°-60°	2972.2	99.1
0°-90°	2999.8	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	2999.8	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	3614	
5°	3552	332
15°	3037	847
25°	2131	958
35°	908	579
45°	244	203
55°	54	52
65°	19	20
75°	6	7
85°	1	1
90°	0	



TEST NUMBER: P858247

CATALOG NUMBER: LX4C45D010 EX4C459840 4LBMDH

CANDELA DISTRIBUTION (FULL):

0°	
0°	3613.9
2.5°	3599.0
5°	3551.5
7.5°	3467.6
10°	3346.3
12.5°	3200.0
15°	3037.1
17.5°	2858.4
20°	2659.7
22.5°	2416.2
25°	2131.1
27.5°	1804.4
30°	1480.3
32.5°	1170.3
35°	907.6
37.5°	688.2
40°	513.6
42.5°	369.0
45°	244.3
47.5°	150.4
50°	100.6
52.5°	72.3
55°	54.0
57.5°	41.6
60°	31.6
62.5°	25.0
65°	19.1
67.5°	15.0
70°	11.6
72.5°	8.3
75°	5.8
77.5°	4.2
80°	2.5
82.5°	1.7
85°	0.8
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)