

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P858276

Luminaire Tested: **LD4C10W2N2050D010 4LBMH_5000K**

Issue Date: 11/9/2023



Test Information

Test Method: LM-79-08
Report Number: P858276
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)
Test Lab: INNOVATION CENTER-P3
Issue Date: 11/9/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C10W2N2050D010 4LBMH_5000K
Description: 4 INCH 1000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, W2N2050 LEDS AND 4LBMH TRIM WITH FINISH

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 820.0 lumens
Efficiency: N/A
Efficacy: 63.1 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 13
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P858276

CATALOG NUMBER: LD4C10W2N2050D010 4LBMH_5000K

Luminous Intensity Polar Plot

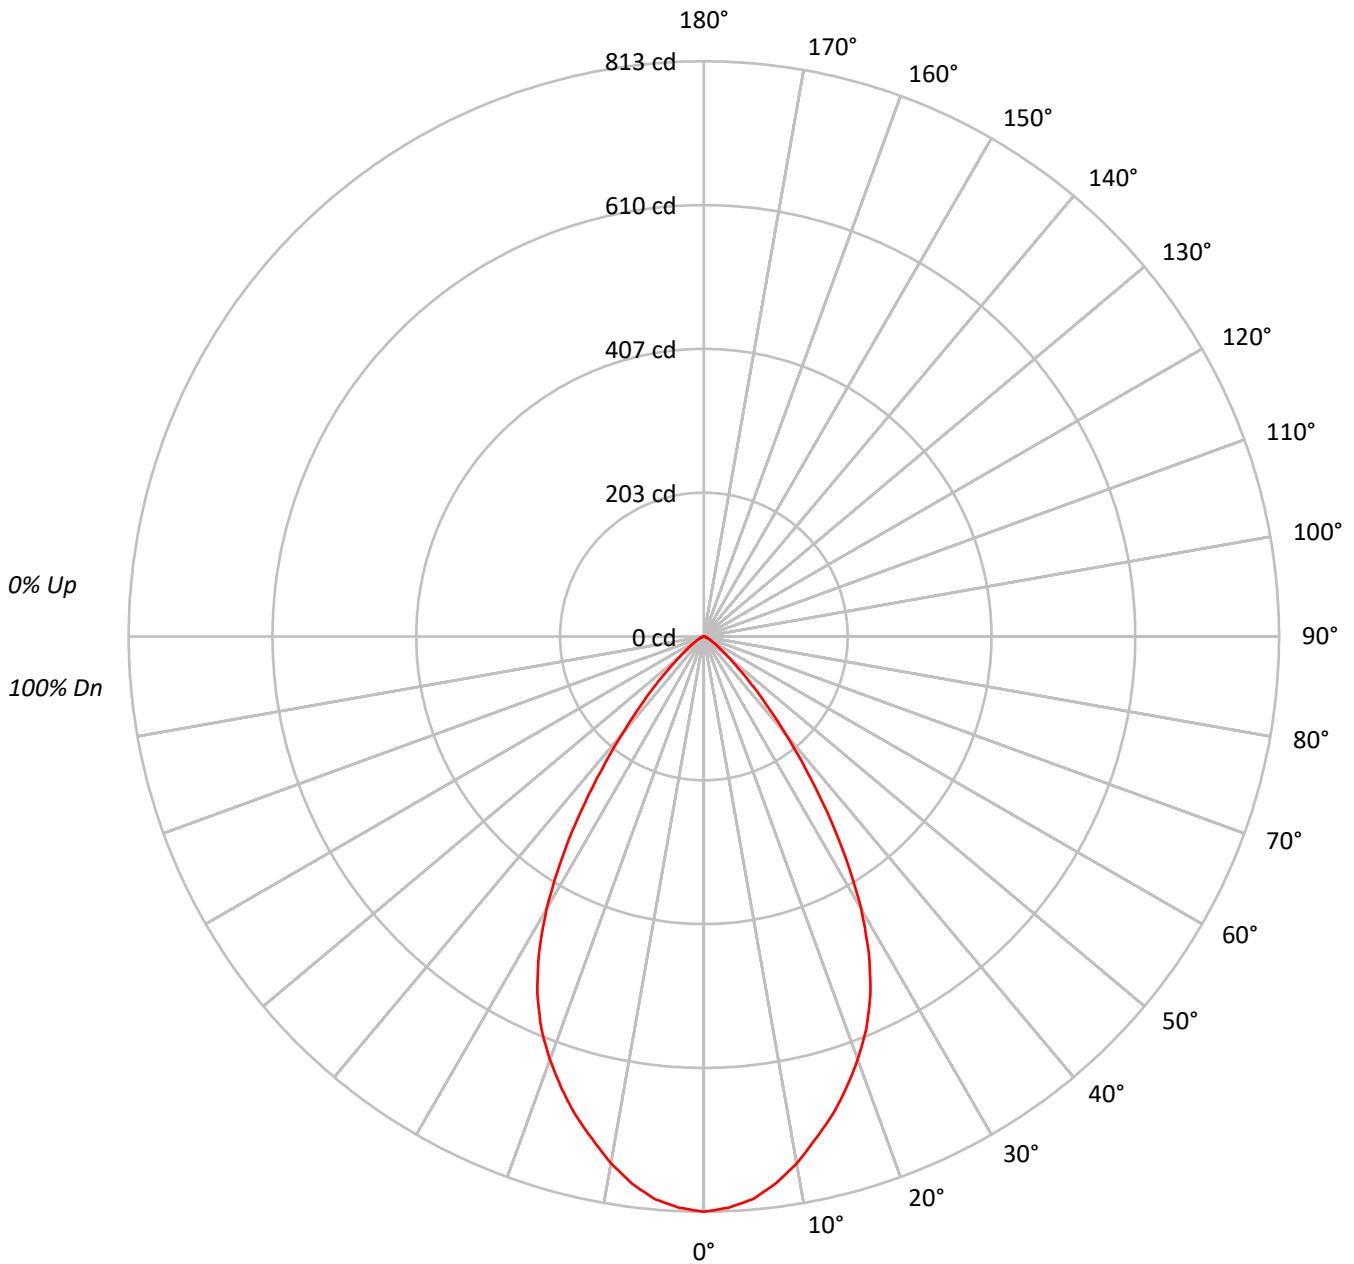



TEST NUMBER: P858276

CATALOG NUMBER: LD4C10W2N2050D010 4LBMH_5000K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85			85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	82	86	83	80	79			79
4	96	88	82	77	94	86	81	77	84	80	76	82	78	75	80	77	74	73			73
5	90	82	75	71	89	81	75	70	79	74	70	77	73	69	75	72	69	67			67
6	86	76	70	65	84	75	69	65	74	68	64	72	68	64	71	67	64	62			62
7	81	71	65	60	80	70	64	60	69	64	60	68	63	59	67	62	59	58			58
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54			54
9	73	63	56	52	72	62	56	52	61	56	52	60	55	52	59	55	52	50			50
10	69	59	53	49	68	59	53	49	58	52	49	57	52	48	56	52	48	47			47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	99892
5°	98436
10°	94322
15°	89095
20°	83162
25°	75490
30°	63028
35°	45668
40°	28579
45°	16332
50°	8524
55°	4776
60°	3047
65°	1802
70°	1329
75°	570
80°	849
85°	0



TEST NUMBER: P858276

CATALOG NUMBER: LD4C10W2N2050D010 4LBMH_5000K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	74.8	9.1
10°-20°	196.3	23.9
20°-30°	252.2	30.8
30°-40°	189.8	23.1
40°-50°	76.2	9.3
50°-60°	21.7	2.6
60°-70°	6.9	0.8
70°-80°	1.9	0.2
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	523.3	63.8
0°-40°	713.1	87.0
0°-60°	811.0	98.9
0°-90°	820.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	820.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	813	
5°	798	75
15°	700	196
25°	557	252
35°	304	190
45°	94	76
55°	22	22
65°	6	7
75°	1	2
85°	0	0
90°	0	



TEST NUMBER: P858276

CATALOG NUMBER: LD4C10W2N2050D010 4LBMH_5000K

CANDELA DISTRIBUTION (FULL):

	0°
0°	813.1
2.5°	808.1
5°	798.2
7.5°	779.7
10°	756.1
12.5°	727.7
15°	700.5
17.5°	669.5
20°	636.1
22.5°	600.2
25°	556.9
27.5°	504.9
30°	444.3
32.5°	376.2
35°	304.5
37.5°	237.6
40°	178.2
42.5°	131.2
45°	94.0
47.5°	64.4
50°	44.6
52.5°	31.0
55°	22.3
57.5°	16.1
60°	12.4
62.5°	8.7
65°	6.2
67.5°	5.0
70°	3.7
72.5°	2.5
75°	1.2
77.5°	1.2
80°	1.2
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)