

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P858277

Luminaire Tested: **LD4C10W2N2050D010 4LBMLI\_2000K**

Issue Date: 11/9/2023



**Test Information**

Test Method: LM-79-08  
Report Number: P858277  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208178)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 11/9/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD4C10W2N2050D010 4LBMLI\_2000K  
Description: 4 INCH 1000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2000K, W2N2050 LEDS AND 4LBMLI TRIM WITH FINISH  
  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 854.0 lumens  
Efficiency: N/A  
Efficacy: 65.7 lumens/watt  
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.76  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 13  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P858277

CATALOG NUMBER: LD4C10W2N2050D010 4LBMLI\_2000K

### Luminous Intensity Polar Plot

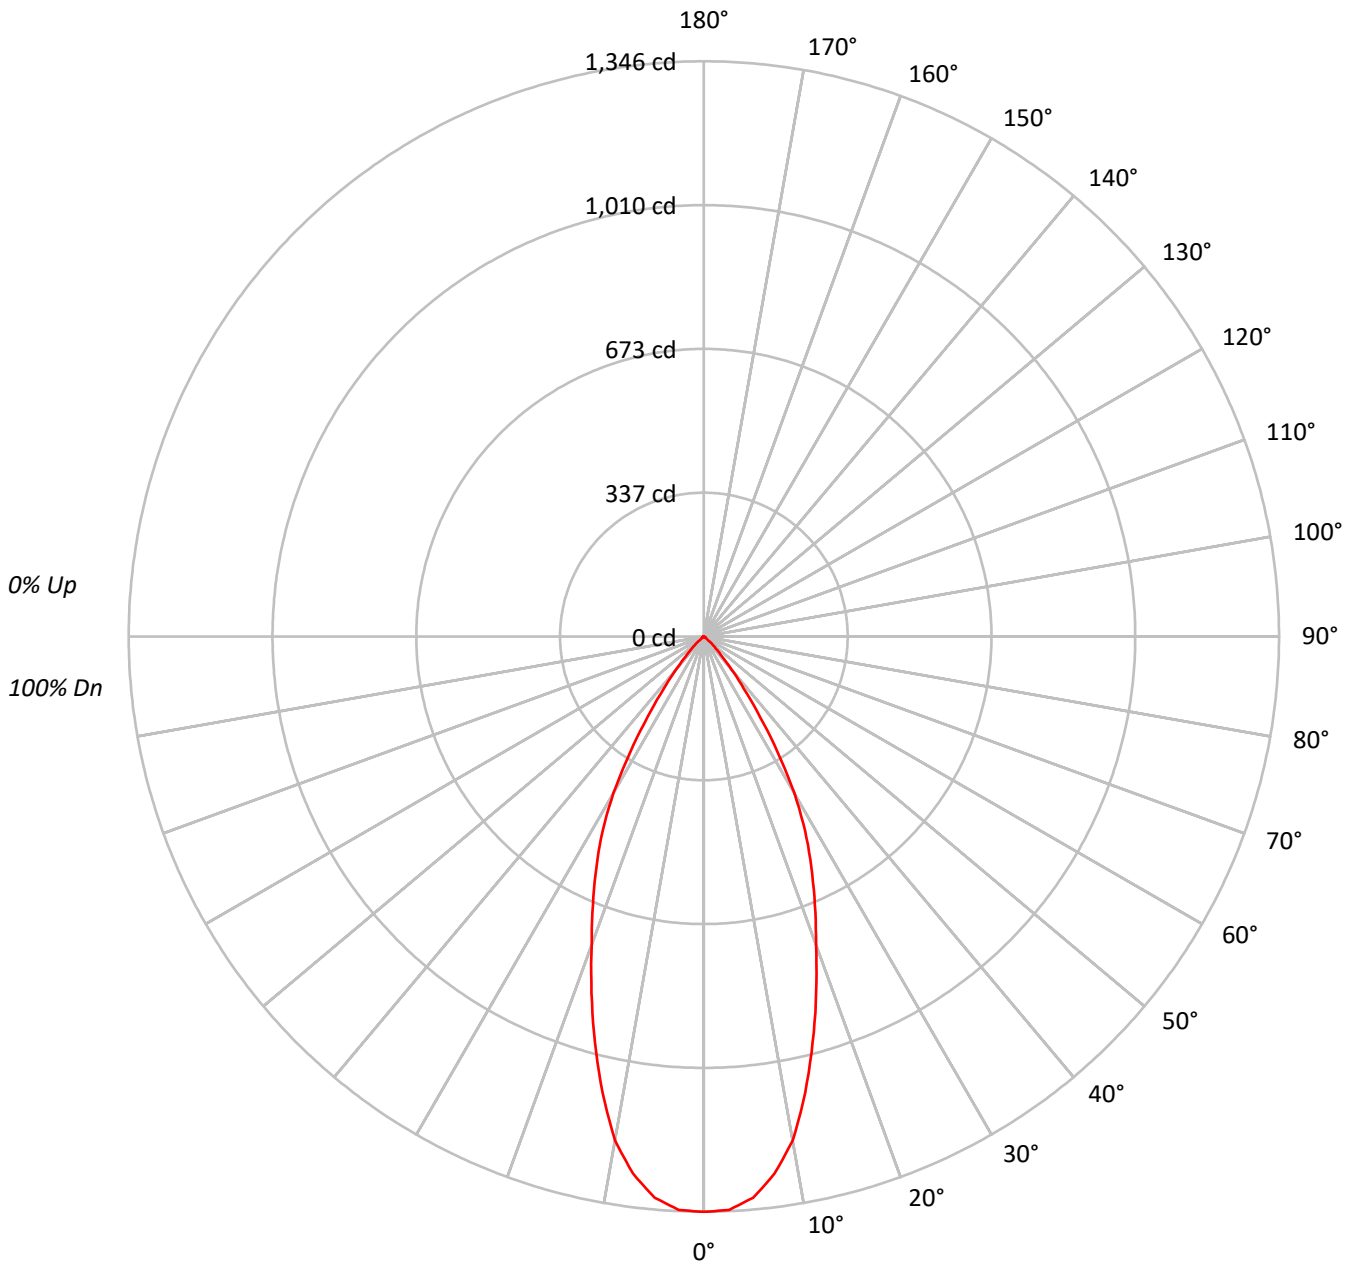



TEST NUMBER: P858277

CATALOG NUMBER: LD4C10W2N2050D010 4LBMLI\_2000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94			
2	109	104	100	97	107	102	99	96	99	96	94	96	94	92	94	92	90	88			
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83			
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	79	78			
5	94	87	81	77	93	86	81	77	84	79	76	82	78	75	81	77	75	73			
6	90	82	76	72	89	81	76	72	80	75	71	78	74	71	77	73	71	69			
7	86	77	72	68	85	77	71	68	75	71	67	74	70	67	73	69	67	65			
8	82	73	68	64	81	73	67	64	72	67	64	71	66	63	70	66	63	62			
9	79	70	64	60	78	69	64	60	68	63	60	67	63	60	67	63	60	58			
10	75	66	61	57	74	66	61	57	65	60	57	64	60	57	64	60	57	56			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	165398
5°	162589
10°	149387
15°	125101
20°	100224
25°	80533
30°	59950
35°	34255
40°	16069
45°	6828
50°	2179
55°	1114
60°	762
65°	610
70°	359
75°	0
80°	0
85°	0



TEST NUMBER: P858277

CATALOG NUMBER: LD4C10W2N2050D010 4LBMLI\_2000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	121.9	14.3
10°-20°	272.5	31.9
20°-30°	270.9	31.7
30°-40°	147.5	17.3
40°-50°	34.1	4.0
50°-60°	4.8	0.6
60°-70°	1.8	0.2
70°-80°	0.4	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	665.3	77.9
0°-40°	812.9	95.2
0°-60°	851.8	99.7
0°-90°	854.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	854.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	1346	
5°	1318	122
15°	984	273
25°	594	271
35°	228	148
45°	39	34
55°	5	5
65°	2	2
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P858277

CATALOG NUMBER: LD4C10W2N2050D010 4LBMLI\_2000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	1346.3
2.5°	1343.2
5°	1318.4
7.5°	1267.8
10°	1197.5
12.5°	1094.2
15°	983.6
17.5°	874.1
20°	766.6
22.5°	678.8
25°	594.1
27.5°	513.5
30°	422.6
32.5°	321.3
35°	228.4
37.5°	153.9
40°	100.2
42.5°	63.0
45°	39.3
47.5°	22.7
50°	11.4
52.5°	6.2
55°	5.2
57.5°	3.1
60°	3.1
62.5°	2.1
65°	2.1
67.5°	1.0
70°	1.0
72.5°	1.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)