

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P858335

Luminaire Tested: **LD4C10W2N2765D010 4LBNLI\_5000K**

Issue Date: 11/9/2023



**Test Information**

Test Method: LM-79-08  
Report Number: P858335  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 11/9/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD4C10W2N2765D010 4LBNLI\_5000K  
Description: 4 INCH 1000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, W2N2765 LEDS  
AND 4LBNLI TRIM WITH FINISH  
  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 803.0 lumens  
Efficiency: N/A  
Efficacy: 61.8 lumens/watt  
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 13  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P858335

CATALOG NUMBER: LD4C10W2N2765D010 4LBNLI\_5000K

### Luminous Intensity Polar Plot

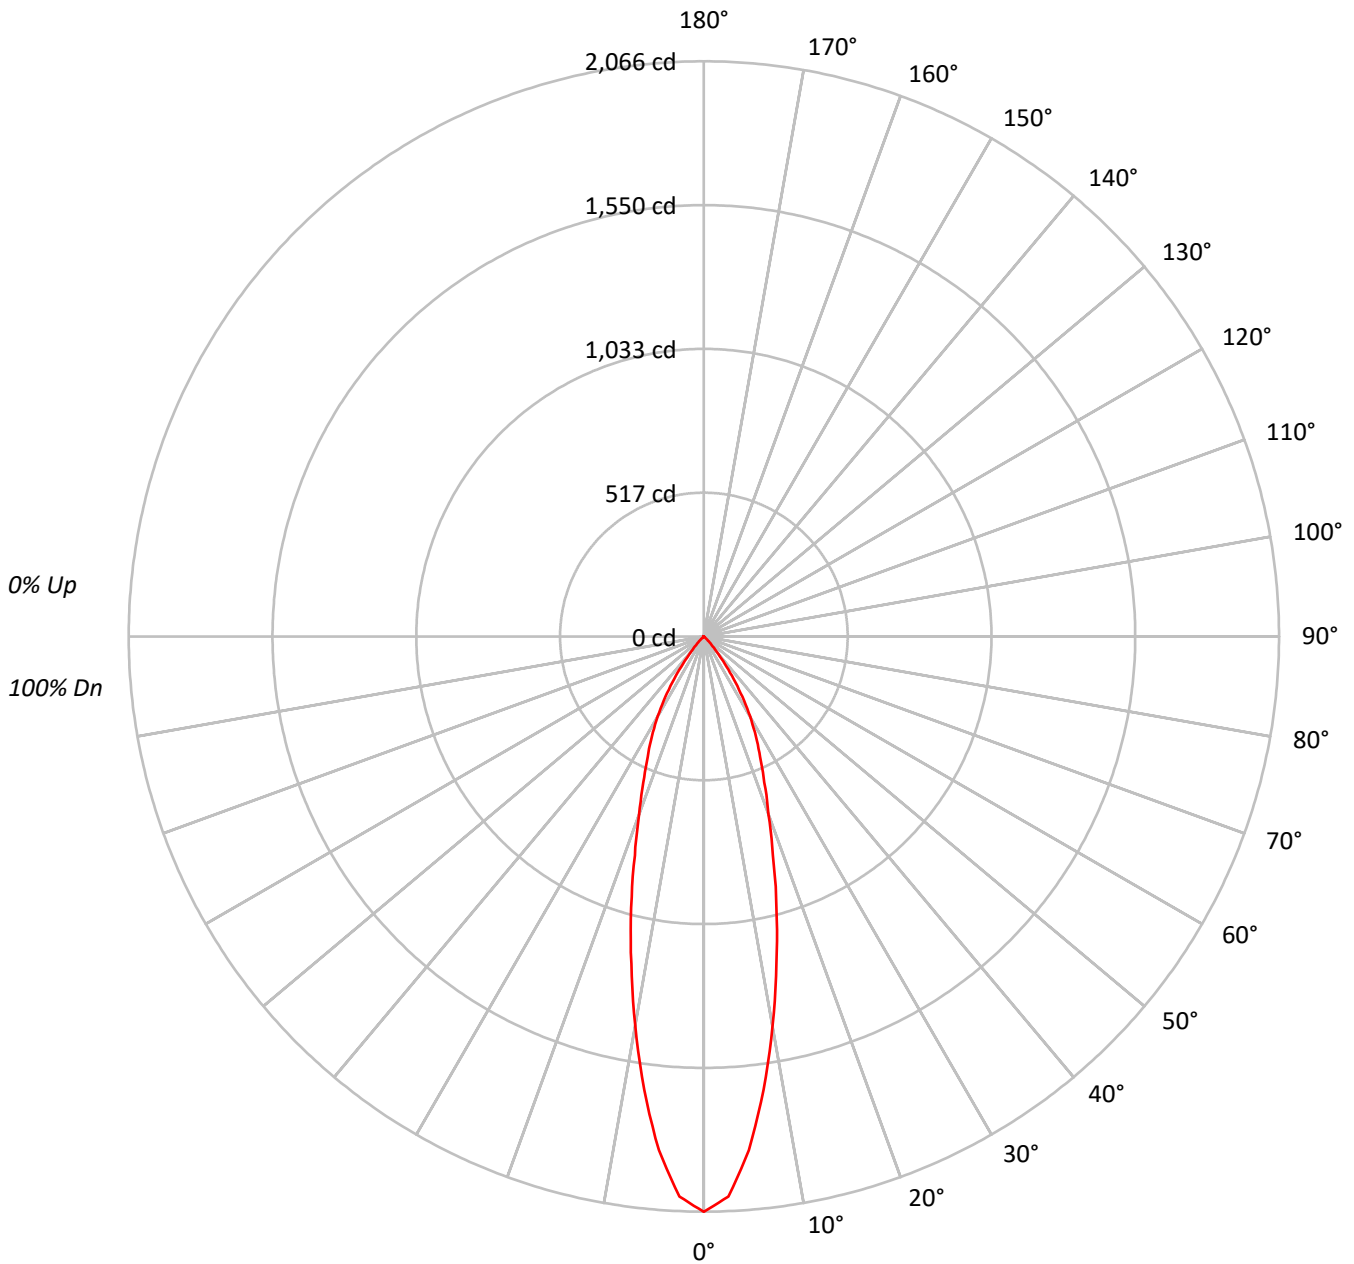



TEST NUMBER: P858335

CATALOG NUMBER: LD4C10W2N2765D010 4LBNLI\_5000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	92	90	90	90	90
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85	85	85	85
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81	81	81	81
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77	77	77	77
6	92	85	80	76	91	84	79	76	83	78	75	81	78	75	80	77	74	73	73	73	73
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	69	69	69	69
8	85	77	72	68	84	77	72	68	76	71	68	75	71	68	74	70	67	66	66	66	66
9	82	74	69	65	81	73	68	65	72	68	65	72	68	65	71	67	64	63	63	63	63
10	79	71	66	62	78	70	65	62	69	65	62	69	65	62	68	64	62	61	61	61	61

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	253877
5°	228455
10°	177106
15°	128192
20°	88758
25°	64713
30°	47012
35°	27821
40°	11707
45°	3649
50°	478
55°	257
60°	295
65°	349
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P858335

CATALOG NUMBER: LD4C10W2N2765D010 4LBNLI\_5000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	162.9	20.3
10°-20°	278.8	34.7
20°-30°	221.6	27.6
30°-40°	117.3	14.6
40°-50°	20.2	2.5
50°-60°	1.5	0.2
60°-70°	0.7	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	663.2	82.6
0°-40°	780.5	97.2
0°-60°	802.2	99.9
0°-90°	803.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	803.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	2066	
5°	1852	163
15°	1008	279
25°	477	222
35°	186	117
45°	21	20
55°	1	1
65°	1	1
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P858335

CATALOG NUMBER: LD4C10W2N2765D010 4LBNLI\_5000K

**CANDELA DISTRIBUTION (FULL):**

0°	
0°	2066.5
2.5°	2013.3
5°	1852.5
7.5°	1642.3
10°	1419.7
12.5°	1204.5
15°	1007.9
17.5°	824.8
20°	678.9
22.5°	567.6
25°	477.4
27.5°	404.4
30°	331.4
32.5°	257.2
35°	185.5
37.5°	122.5
40°	73.0
42.5°	42.1
45°	21.0
47.5°	7.4
50°	2.5
52.5°	2.5
55°	1.2
57.5°	1.2
60°	1.2
62.5°	1.2
65°	1.2
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)