

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P858354

Luminaire Tested: **LD4C10W2N2765D010 4LBWLI_6500K**

Issue Date: 11/9/2023



Test Information

Test Method: LM-79-08
Report Number: P858354
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208077)
Test Lab: INNOVATION CENTER-P3
Issue Date: 11/9/2023
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C10W2N2765D010 4LBWLI_6500K
Description: 4 INCH 1000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 6500K, W2N2765 LEDS
AND 4LBWLI TRIM WITH FINISH

Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 1116.0 lumens
Efficiency: N/A
Efficacy: 85.8 lumens/watt
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.18
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 13
Input Voltage (V): NR
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P858354

CATALOG NUMBER: LD4C10W2N2765D010 4LBWLI_6500K

Luminous Intensity Polar Plot

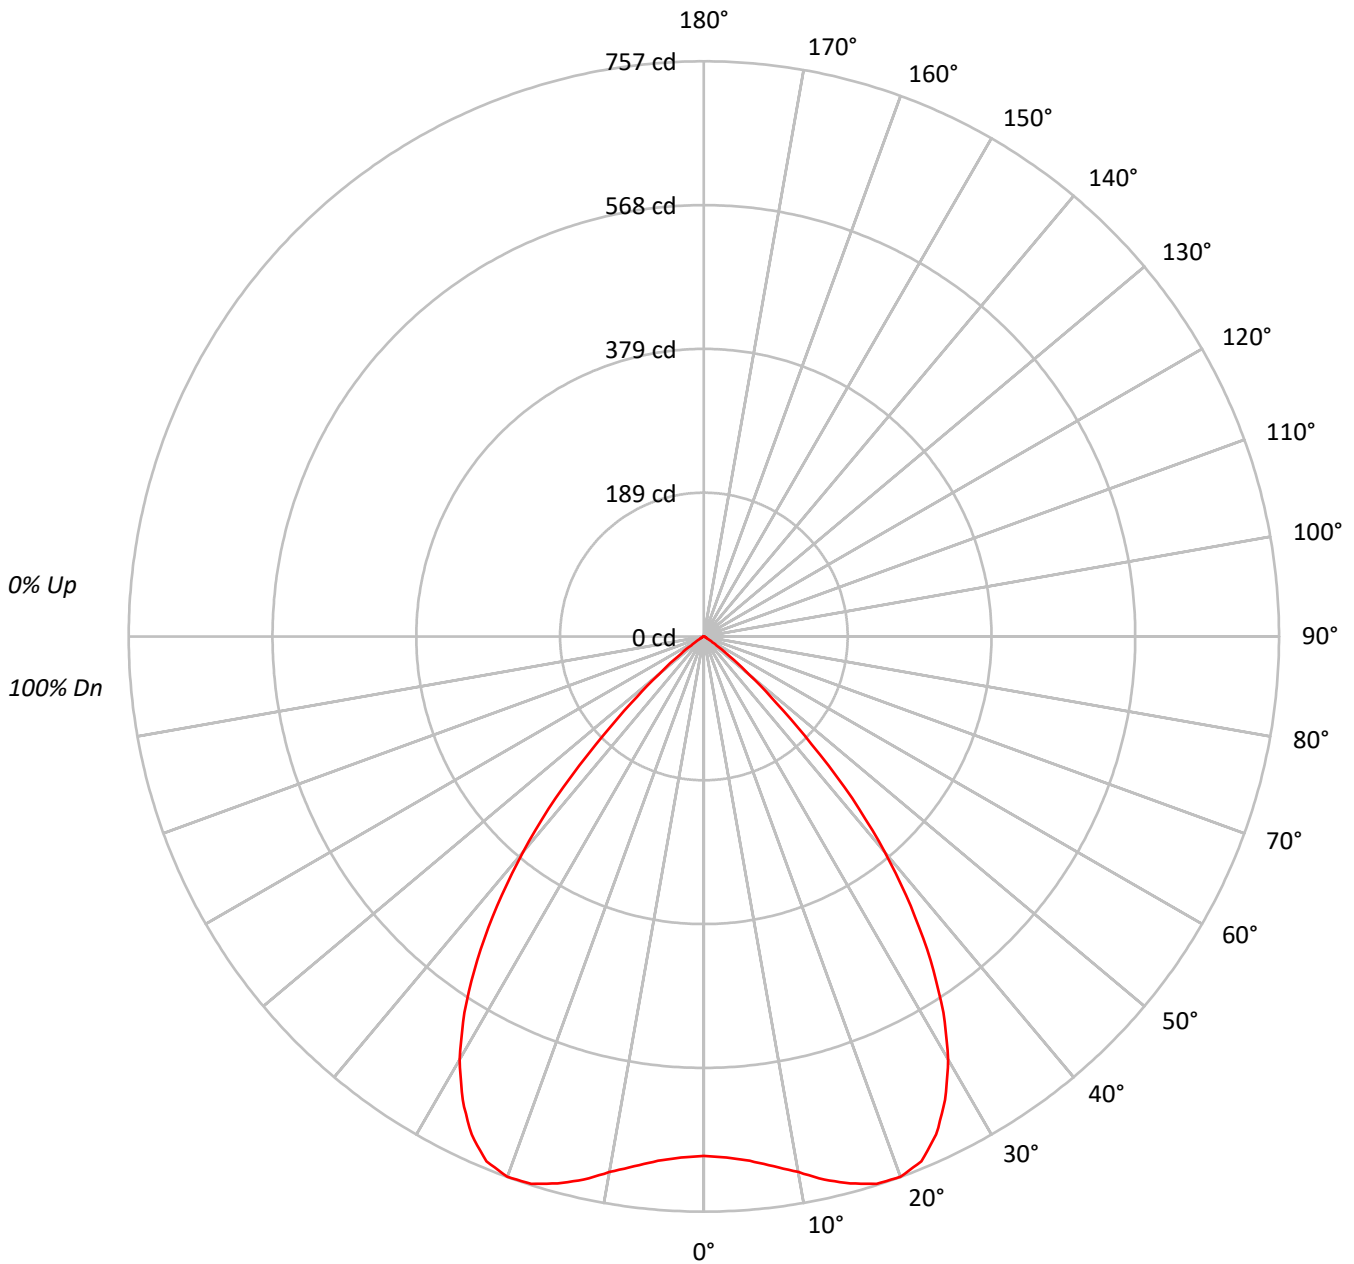



TEST NUMBER: P858354

CATALOG NUMBER: LD4C10W2N2765D010 4LBWLI_6500K

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				20	
RC	80				70				50				30				10				0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0	
RCR																						
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92				92
2	106	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84				84
3	100	93	87	83	98	92	86	82	89	85	81	86	83	80	84	81	78	77				77
4	94	86	79	75	92	84	79	74	82	77	73	80	76	72	78	75	72	70				70
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64				64
6	83	73	66	62	82	72	66	61	71	65	61	69	64	60	68	63	60	58				58
7	78	68	61	56	77	67	61	56	66	60	56	64	59	55	63	59	55	54				54
8	74	63	56	52	72	62	56	51	61	55	51	60	55	51	59	54	51	49				49
9	69	59	52	48	68	58	52	47	57	51	47	56	51	47	55	50	47	45				45
10	66	55	48	44	65	54	48	44	53	48	44	53	47	44	52	47	43	42				42

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	84007
5°	85426
10°	89295
15°	94767
20°	98929
25°	98060
30°	91201
35°	78018
40°	59435
45°	34870
50°	14889
55°	4391
60°	1253
65°	756
70°	467
75°	617
80°	0
85°	0



TEST NUMBER: P858354

CATALOG NUMBER: LD4C10W2N2765D010 4LBWLI_6500K

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	66.9	6.0
10°-20°	211.0	18.9
20°-30°	329.2	29.5
30°-40°	320.3	28.7
40°-50°	160.0	14.3
50°-60°	24.8	2.2
60°-70°	3.0	0.3
70°-80°	0.9	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	607.1	54.4
0°-40°	927.4	83.1
0°-60°	1112.2	99.7
0°-90°	1116.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1116.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	684	
5°	693	67
15°	745	211
25°	723	329
35°	520	320
45°	201	160
55°	20	25
65°	3	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P858354

CATALOG NUMBER: LD4C10W2N2765D010 4LBWLI_6500K

CANDELA DISTRIBUTION (FULL):

	0°
0°	683.8
2.5°	686.3
5°	692.7
7.5°	703.0
10°	715.8
12.5°	732.3
15°	745.1
17.5°	755.4
20°	756.7
22.5°	747.7
25°	723.4
27.5°	687.6
30°	642.9
32.5°	586.7
35°	520.2
37.5°	447.3
40°	370.6
42.5°	288.9
45°	200.7
47.5°	129.1
50°	77.9
52.5°	42.2
55°	20.5
57.5°	9.0
60°	5.1
62.5°	3.8
65°	2.6
67.5°	2.6
70°	1.3
72.5°	1.3
75°	1.3
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)