

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P858434

Luminaire Tested: **LD4C15W2N2765D010 4LBWLI\_3000K**

Issue Date: 11/9/2023

**Test Information**

Test Method: LM-79-08  
Report Number: P858434  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208077)  
Test Lab: INNOVATION CENTER-P3  
Issue Date: 11/9/2023  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD4C15W2N2765D010 4LBWLI\_3000K  
Description: 4 INCH 1500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, W2N2765 LEDS  
AND 4LBWLI TRIM WITH FINISH  
  
Light Source: -  
Ballast/Driver: -

**Summary**


Lumens per Lamp: N/A  
Luminaire Lumens: 1496.0 lumens  
Efficiency: N/A  
Efficacy: 77.9 lumens/watt  
Spacing Criteria (0/90/45): 1.29 / 1.29 / 1.18  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct

Input Watts (W): 19.2  
Input Voltage (V): NR  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P858434

CATALOG NUMBER: LD4C15W2N2765D010 4LBWLI\_3000K

### Luminous Intensity Polar Plot

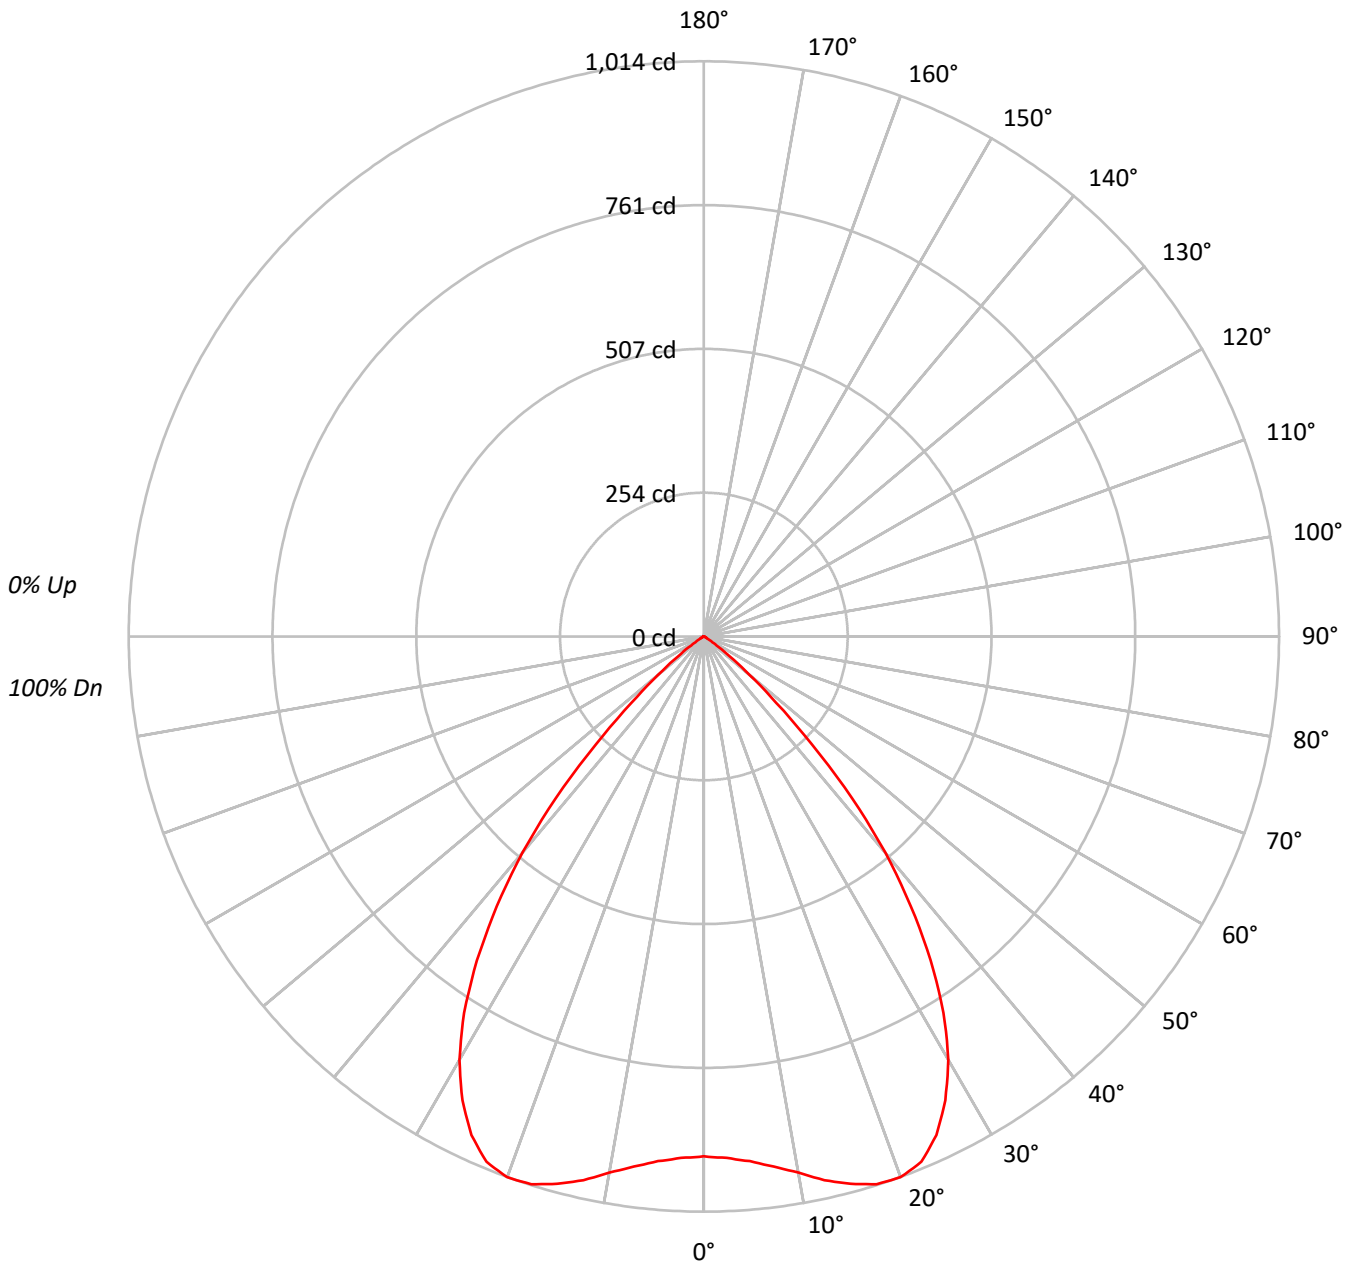



TEST NUMBER: P858434

CATALOG NUMBER: LD4C15W2N2765D010 4LBWLI\_3000K

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92	92	92	92
2	106	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84	84	84	84
3	100	93	87	83	98	92	86	82	89	85	81	86	83	80	84	81	78	77	77	77	77
4	94	86	79	75	92	84	79	74	82	77	73	80	76	72	78	75	72	70	70	70	70
5	88	79	72	68	87	78	72	67	76	71	67	74	70	66	73	69	65	64	64	64	64
6	83	73	66	62	82	72	66	61	71	65	61	69	64	60	68	63	60	58	58	58	58
7	78	68	61	56	77	67	61	56	66	60	56	64	59	55	63	59	55	54	54	54	54
8	74	63	56	52	72	62	56	51	61	55	51	60	55	51	59	54	51	49	49	49	49
9	69	59	52	48	68	58	52	47	57	51	47	56	51	47	55	50	47	45	45	45	45
10	66	55	48	44	65	54	48	44	53	48	44	53	47	44	52	47	43	42	42	42	42

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	112607
5°	114518
10°	119696
15°	127047
20°	132607
25°	131460
30°	122254
35°	104579
40°	79690
45°	46736
50°	19973
55°	5869
60°	1695
65°	988
70°	611
75°	807
80°	0
85°	0



TEST NUMBER: P858434

CATALOG NUMBER: LD4C15W2N2765D010 4LBWLI\_3000K

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	89.6	6.0
10°-20°	282.9	18.9
20°-30°	441.3	29.5
30°-40°	429.4	28.7
40°-50°	214.5	14.3
50°-60°	33.2	2.2
60°-70°	4.0	0.3
70°-80°	1.1	0.1
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	813.8	54.4
0°-40°	1243.2	83.1
0°-60°	1490.9	99.7
0°-90°	1496.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1496.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	917	
5°	929	90
15°	999	283
25°	970	441
35°	697	429
45°	269	214
55°	27	33
65°	3	4
75°	2	1
85°	0	0
90°	0	



TEST NUMBER: P858434

CATALOG NUMBER: LD4C15W2N2765D010 4LBWLI\_3000K

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	916.6
2.5°	920.0
5°	928.6
7.5°	942.3
10°	959.5
12.5°	981.7
15°	998.9
17.5°	1012.6
20°	1014.3
22.5°	1002.3
25°	969.8
27.5°	921.7
30°	861.8
32.5°	786.5
35°	697.3
37.5°	599.6
40°	496.9
42.5°	387.2
45°	269.0
47.5°	173.0
50°	104.5
52.5°	56.5
55°	27.4
57.5°	12.0
60°	6.9
62.5°	5.1
65°	3.4
67.5°	3.4
70°	1.7
72.5°	1.7
75°	1.7
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)