

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P858796

Luminaire Tested: **LX4C05D010 EX4C059030 4LBMH**

Issue Date: 2/8/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P858796  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/8/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LX4C05D010 EX4C059030 4LBMH  
Description: 4 INCH 500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS AND 4LBM TRIM WITH H FINISH  
Light Source: -  
Ballast/Driver:


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 492.0 lumens  
Efficiency: N/A  
Efficacy: 68.3 lumens/watt  
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.2  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P858796

CATALOG NUMBER: LX4C05D010 EX4C059030 4LBMH

### Luminous Intensity Polar Plot

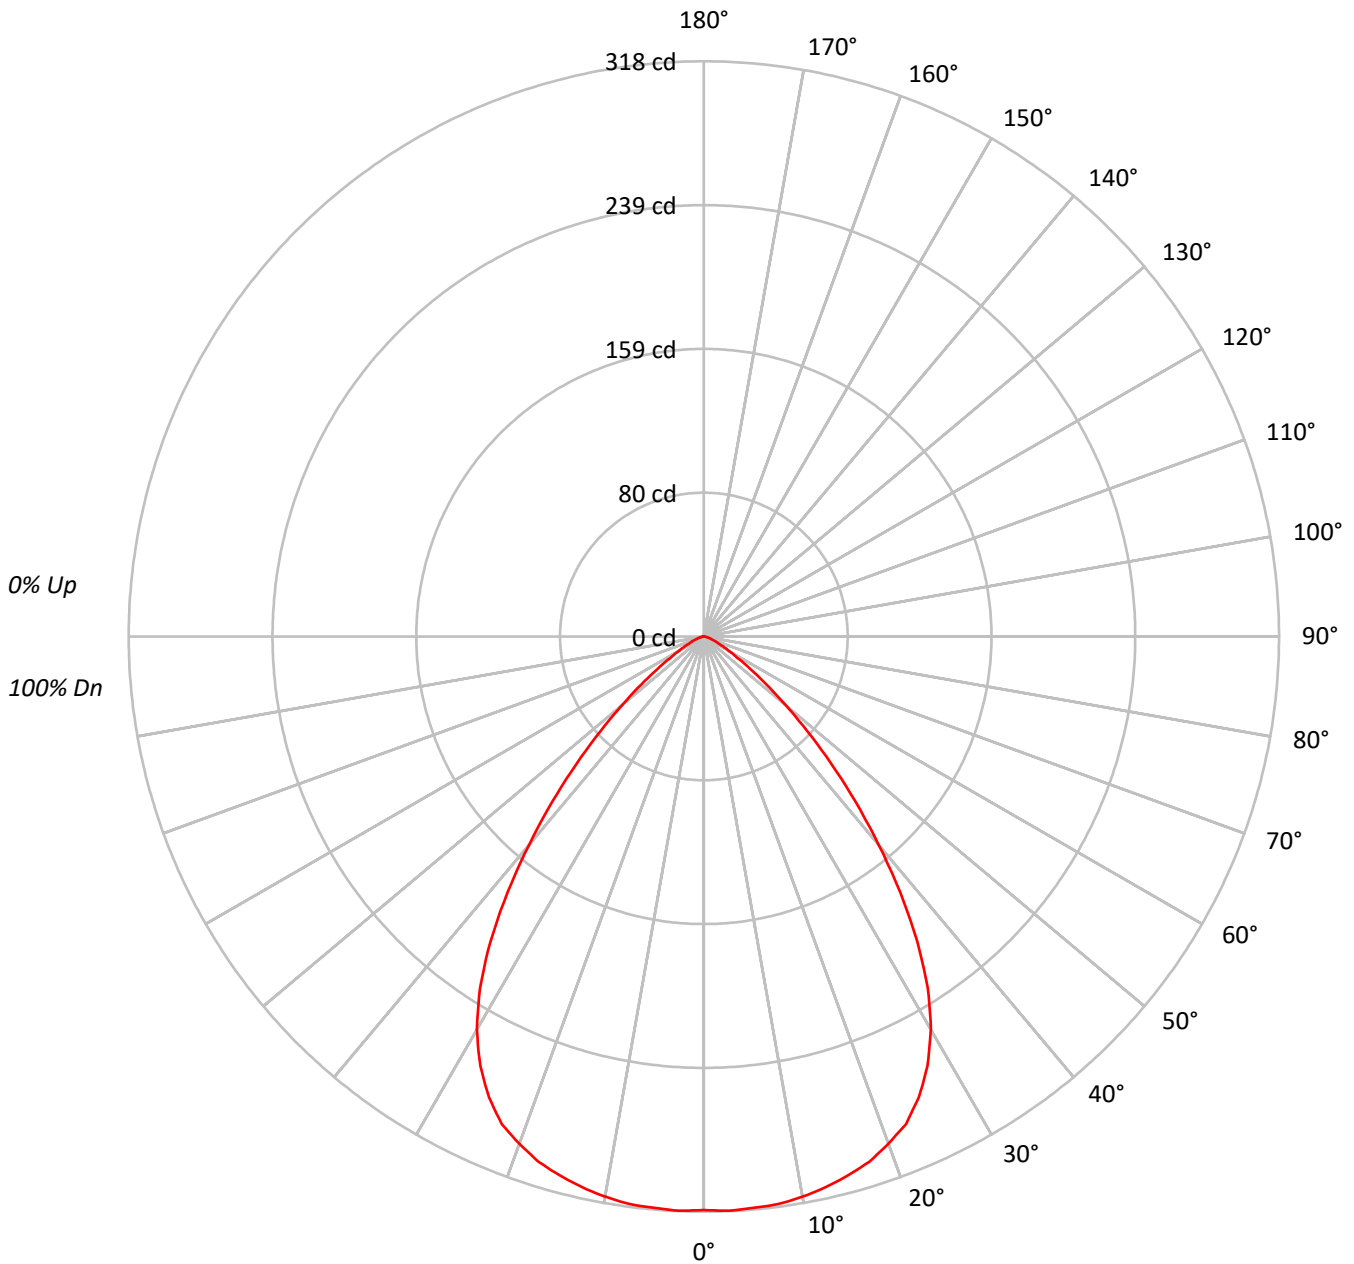



TEST NUMBER: P858796

CATALOG NUMBER: LX4C05D010 EX4C059030 4LBMH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91			91
2	105	100	95	91	103	98	93	90	95	91	88	91	88	86	89	86	84	82			82
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74			74
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67			67
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	62	61			61
6	81	71	64	58	80	70	63	58	68	62	58	67	61	57	65	61	57	55			55
7	76	65	58	53	75	65	58	53	63	57	53	62	56	52	61	56	52	50			50
8	72	60	53	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46			46
9	68	56	49	45	66	56	49	45	55	49	44	54	48	44	53	48	44	43			43
10	64	52	46	41	63	52	46	41	51	45	41	50	45	41	49	44	41	39			39

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	38957
5°	39106
10°	39233
15°	39225
20°	39012
25°	38104
30°	35607
35°	30835
40°	24088
45°	17287
50°	11219
55°	6726
60°	3931
65°	2529
70°	1688
75°	1282
80°	920
85°	0



TEST NUMBER: P858796

CATALOG NUMBER: LX4C05D010 EX4C059030 4LBMH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	30.2	6.1
10°-20°	87.0	17.7
20°-30°	128.4	26.1
30°-40°	126.7	25.8
40°-50°	77.5	15.8
50°-60°	29.7	6.0
60°-70°	9.3	1.9
70°-80°	2.7	0.6
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	245.6	49.9
0°-40°	372.3	75.7
0°-60°	479.6	97.5
0°-90°	492.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	492.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	317	
5°	317	30
15°	308	87
25°	281	128
35°	206	127
45°	100	78
55°	31	30
65°	9	9
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P858796

CATALOG NUMBER: LX4C05D010 EX4C059030 4LBMH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	317.1
2.5°	317.8
5°	317.1
7.5°	316.5
10°	314.5
12.5°	311.8
15°	308.4
17.5°	304.4
20°	298.4
22.5°	291.8
25°	281.1
27.5°	267.7
30°	251.0
32.5°	230.3
35°	205.6
37.5°	178.2
40°	150.2
42.5°	124.2
45°	99.5
47.5°	77.4
50°	58.7
52.5°	43.4
55°	31.4
57.5°	22.0
60°	16.0
62.5°	12.0
65°	8.7
67.5°	6.7
70°	4.7
72.5°	3.3
75°	2.7
77.5°	1.3
80°	1.3
82.5°	0.7
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)