

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P858839

Luminaire Tested: **LX4C05D010 EX4C059050 4LBMDH**

Issue Date: 2/18/2022

**Test Information**

Test Method: LM-79-08  
Report Number: P858839  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-9)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/18/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LX4C05D010 EX4C059050 4LBMDH  
Description: 4 INCH 500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS AND 4LRMD45 TRIM WITH H FINISH  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 482.0 lumens  
Efficiency: N/A  
Efficacy: 66.9 lumens/watt  
Spacing Criteria (0/90/45): 0.86 / 0.86 / 0.83  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.2  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P858839

CATALOG NUMBER: LX4C05D010 EX4C059050 4LBMDH

### Luminous Intensity Polar Plot

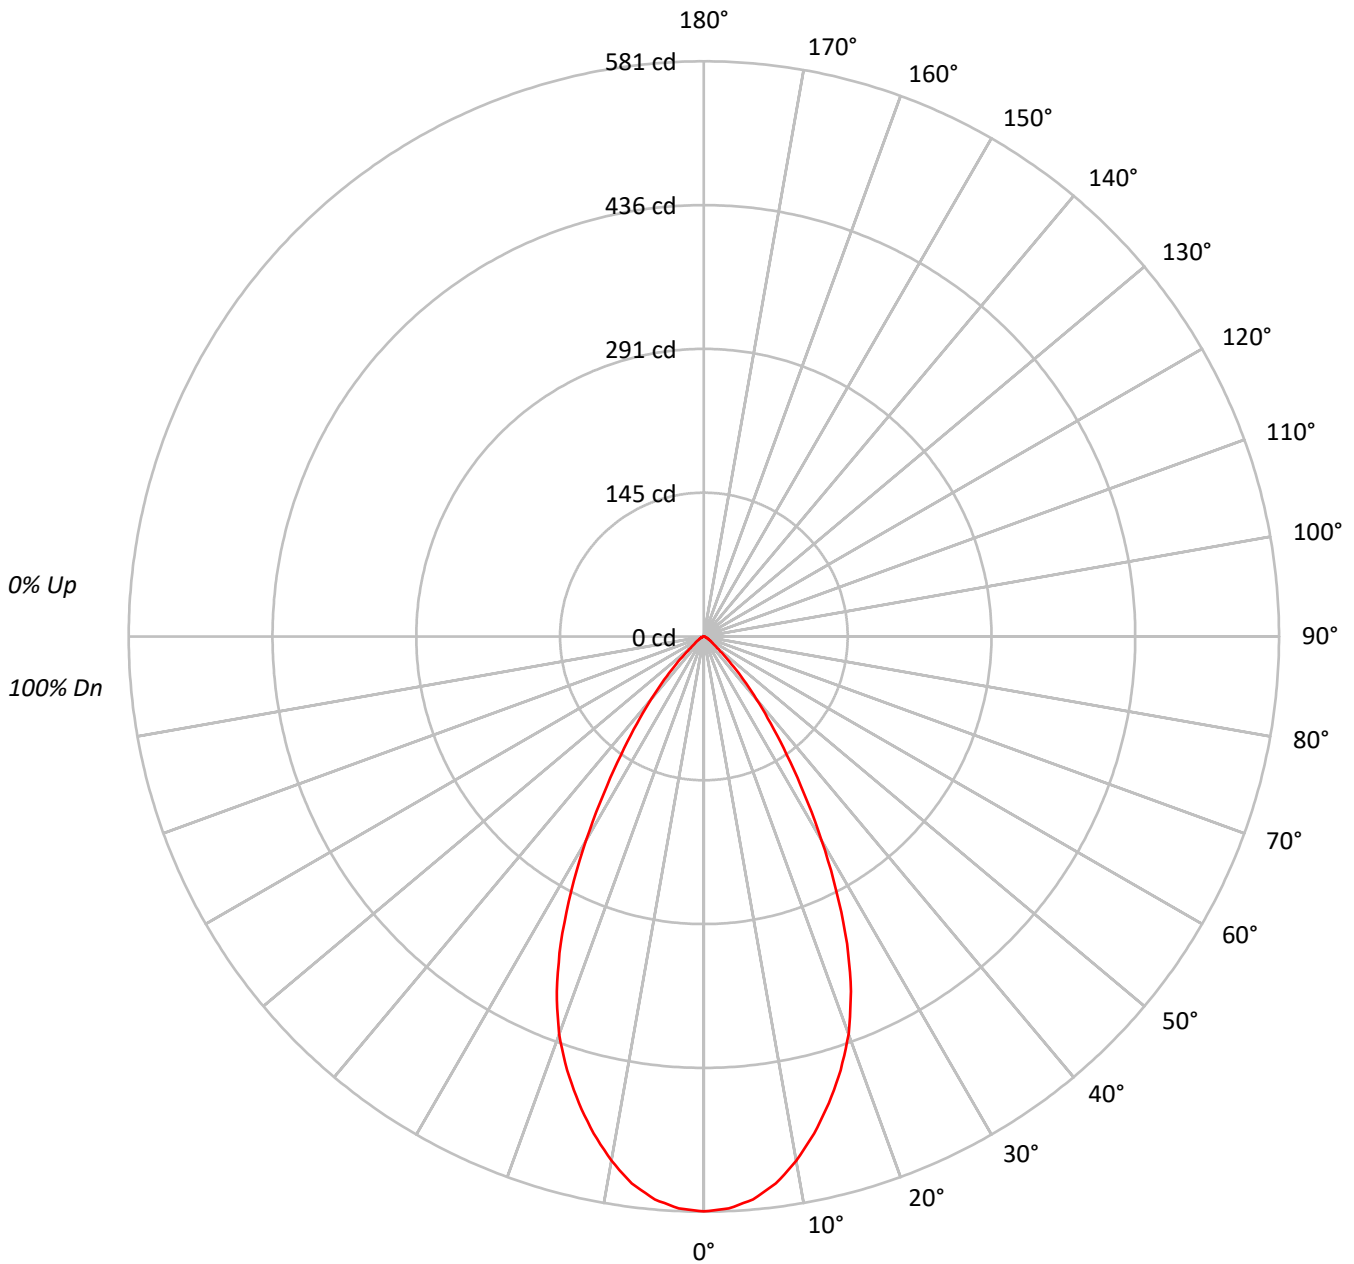



TEST NUMBER: P858839

CATALOG NUMBER: LX4C05D010 EX4C059050 4LBMDH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	104	103	101	101	99	98	97	96	95	93			
2	108	103	99	95	106	101	97	94	98	95	92	95	92	90	92	90	88	87			
3	102	96	91	87	100	94	90	86	92	88	85	89	86	83	87	84	82	81			
4	97	90	84	80	95	88	83	79	86	82	78	84	80	77	82	79	77	75			
5	92	84	78	74	91	83	77	73	81	76	73	79	75	72	78	74	71	70			
6	88	79	73	68	86	78	72	68	76	71	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61			
8	79	70	64	60	78	69	63	60	68	63	59	67	62	59	66	62	59	57			
9	76	66	60	56	74	65	60	56	64	59	56	64	59	56	63	58	55	54			
10	72	62	57	53	71	62	56	53	61	56	53	60	56	52	60	55	52	51			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	71341
5°	70380
10°	67077
15°	62067
20°	55877
25°	46414
30°	33748
35°	21867
40°	13231
45°	6828
50°	3096
55°	1863
60°	1253
65°	901
70°	682
75°	427
80°	283
85°	141



TEST NUMBER: P858839

CATALOG NUMBER: LX4C05D010 EX4C059050 4LBMDH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	53.4	11.1
10°-20°	136.2	28.3
20°-30°	154.0	31.9
30°-40°	93.1	19.3
40°-50°	32.6	6.8
50°-60°	8.4	1.7
60°-70°	3.2	0.7
70°-80°	1.1	0.2
80°-90°	0.2	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	343.6	71.3
0°-40°	436.6	90.6
0°-60°	477.6	99.1
0°-90°	482.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	482.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	581	
5°	571	53
15°	488	136
25°	342	154
35°	146	93
45°	39	33
55°	9	8
65°	3	3
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P858839

CATALOG NUMBER: LX4C05D010 EX4C059050 4LBMDH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	580.7
2.5°	578.3
5°	570.7
7.5°	557.2
10°	537.7
12.5°	514.2
15°	488.0
17.5°	459.3
20°	427.4
22.5°	388.2
25°	342.4
27.5°	289.9
30°	237.9
32.5°	188.0
35°	145.8
37.5°	110.6
40°	82.5
42.5°	59.3
45°	39.3
47.5°	24.2
50°	16.2
52.5°	11.6
55°	8.7
57.5°	6.7
60°	5.1
62.5°	4.0
65°	3.1
67.5°	2.4
70°	1.9
72.5°	1.3
75°	0.9
77.5°	0.7
80°	0.4
82.5°	0.3
85°	0.1
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)