

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P858893

Luminaire Tested: **LX4C05D010 EX4C059835 4LBWH**

Issue Date: 2/8/2022



Test Information

Test Method: LM-79-08
Report Number: P858893
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C05D010 EX4C059835 4LBWH
Description:
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 494.0 lumens
Efficiency: N/A
Efficacy: 68.6 lumens/watt
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P858893

CATALOG NUMBER: LX4C05D010 EX4C059835 4LBWH

Luminous Intensity Polar Plot

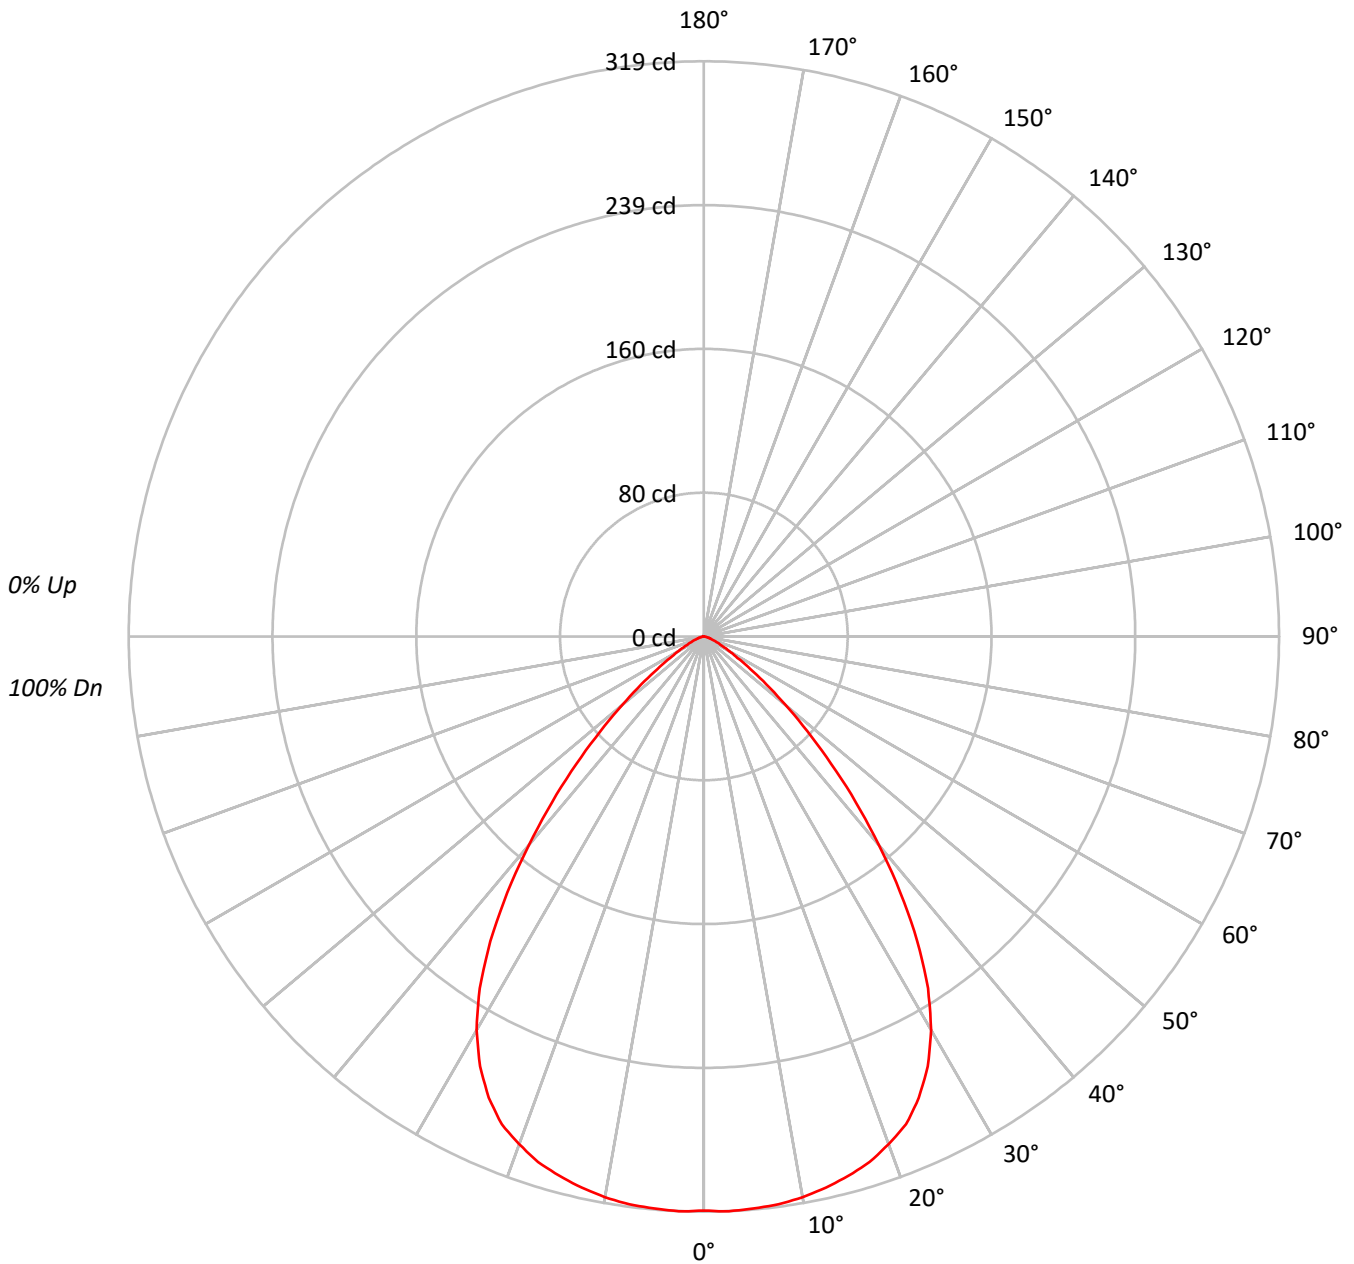



TEST NUMBER: P858893

CATALOG NUMBER: LX4C05D010 EX4C059835 4LBWH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20																	
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91																											
2	105	100	95	91	103	98	93	90	95	91	88	91	88	86	89	86	84	82																											
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74																											
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67																											
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	62	61																											
6	81	71	64	58	80	70	63	58	68	62	58	67	61	57	65	61	57	55																											
7	76	65	58	53	75	65	58	53	63	57	53	62	56	52	61	56	52	50																											
8	72	60	53	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46																											
9	68	56	49	45	66	56	49	45	55	49	44	54	48	44	53	48	44	43																											
10	64	52	46	41	63	52	46	41	51	45	41	50	45	41	49	44	41	39																											

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	39117
5°	39266
10°	39396
15°	39390
20°	39169
25°	38253
30°	35763
35°	30955
40°	24184
45°	17357
50°	11257
55°	6747
60°	3956
65°	2529
70°	1688
75°	1282
80°	920
85°	0



TEST NUMBER: P858893

CATALOG NUMBER: LX4C05D010 EX4C059835 4LBWH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	30.3	6.1
10°-20°	87.4	17.7
20°-30°	128.9	26.1
30°-40°	127.2	25.8
40°-50°	77.9	15.8
50°-60°	29.8	6.0
60°-70°	9.3	1.9
70°-80°	2.7	0.6
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	246.6	49.9
0°-40°	373.9	75.7
0°-60°	481.6	97.5
0°-90°	494.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	494.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	318	
5°	318	30
15°	310	87
25°	282	129
35°	206	127
45°	100	78
55°	32	30
65°	9	9
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P858893

CATALOG NUMBER: LX4C05D010 EX4C059835 4LBWH

CANDELA DISTRIBUTION (FULL):

0°	
0°	318.4
2.5°	319.1
5°	318.4
7.5°	317.7
10°	315.8
12.5°	313.1
15°	309.7
17.5°	305.7
20°	299.6
22.5°	292.9
25°	282.2
27.5°	268.8
30°	252.1
32.5°	231.3
35°	206.4
37.5°	179.0
40°	150.8
42.5°	124.7
45°	99.9
47.5°	77.8
50°	58.9
52.5°	43.6
55°	31.5
57.5°	22.1
60°	16.1
62.5°	12.0
65°	8.7
67.5°	6.7
70°	4.7
72.5°	3.4
75°	2.7
77.5°	1.3
80°	1.3
82.5°	0.7
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)