

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P858938

Luminaire Tested: **LX4C05D010 EX4C059030 4LBMH**

Issue Date: 2/8/2022

Test Information

Test Method: LM-79-08
Report Number: P858938
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C05D010 EX4C059030 4LBMH
Description: 4 INCH 500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS AND 4LBM TRIM WITH H FINISH, DIM TO WARM
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 500.4 lumens
Efficiency: N/A
Efficacy: 69.5 lumens/watt
Spacing Criteria (0/90/45): 1.17 / 1.17 / 1.13
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P858938

CATALOG NUMBER: LX4C05D010 EX4C059030 4LBMH

Luminous Intensity Polar Plot

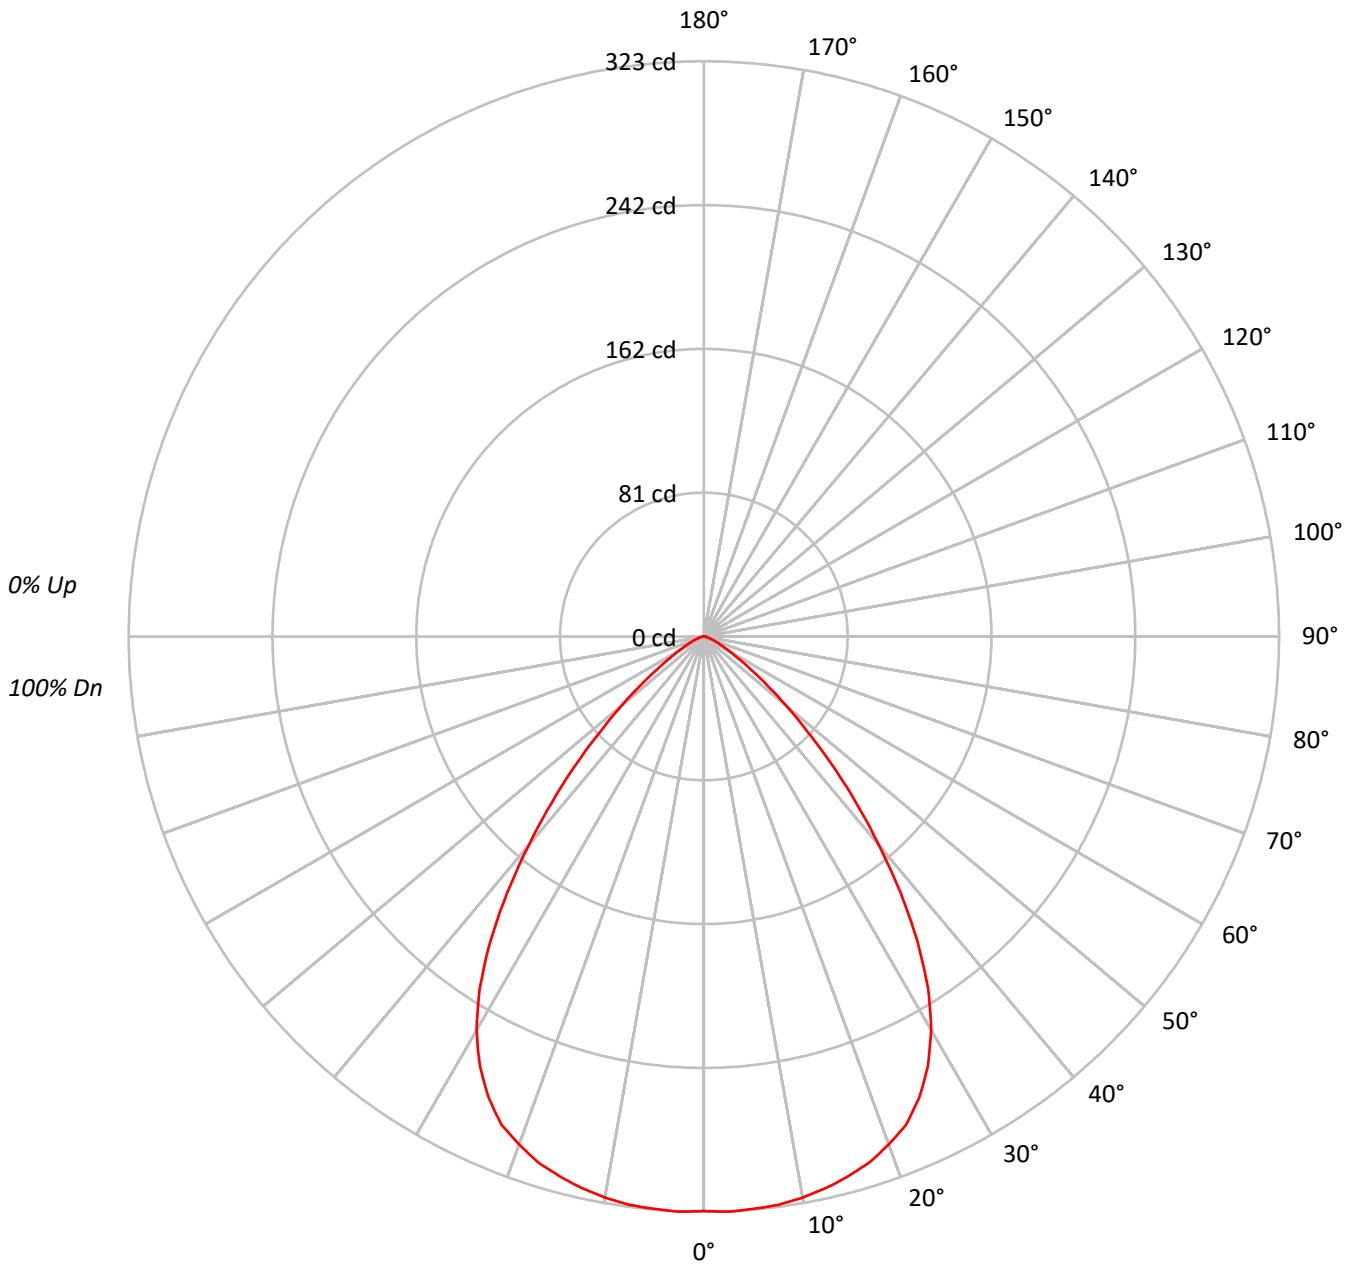



TEST NUMBER: P858938

CATALOG NUMBER: LX4C05D010 EX4C059030 4LBMH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									20								
RC	80									50									30									10									0								
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0															
RCR																																													
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																											
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91																											
2	105	100	95	91	103	98	93	90	95	91	88	91	88	86	89	86	84	82																											
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74																											
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67																											
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	62	61																											
6	81	71	64	58	80	70	63	58	68	62	58	67	61	57	65	61	57	55																											
7	76	65	58	53	75	65	58	53	63	57	53	62	56	52	61	56	52	50																											
8	72	60	53	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46																											
9	68	56	49	45	66	56	49	45	55	49	44	54	48	44	53	48	44	43																											
10	64	52	46	41	63	52	46	41	51	45	41	50	45	41	49	44	41	39																											

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	39633
5°	39784
10°	39907
15°	39899
20°	39679
25°	38755
30°	36217
35°	31360
40°	24505
45°	17583
50°	11410
55°	6833
60°	4005
65°	2558
70°	1724
75°	1282
80°	920
85°	0



TEST NUMBER: P858938

CATALOG NUMBER: LX4C05D010 EX4C059030 4LBMH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	30.7	6.1
10°-20°	88.5	17.7
20°-30°	130.6	26.1
30°-40°	128.9	25.8
40°-50°	78.9	15.8
50°-60°	30.2	6.0
60°-70°	9.4	1.9
70°-80°	2.7	0.5
80°-90°	0.4	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	249.8	49.9
0°-40°	378.7	75.7
0°-60°	487.8	97.5
0°-90°	500.4	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	500.4	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	323	
5°	323	31
15°	314	89
25°	286	131
35°	209	129
45°	101	79
55°	32	30
65°	9	9
75°	3	3
85°	0	0
90°	0	



TEST NUMBER: P858938

CATALOG NUMBER: LX4C05D010 EX4C059030 4LBMH

CANDELA DISTRIBUTION (FULL):

	0°
0°	322.6
2.5°	323.3
5°	322.6
7.5°	321.9
10°	319.9
12.5°	317.2
15°	313.7
17.5°	309.6
20°	303.5
22.5°	296.8
25°	285.9
27.5°	272.3
30°	255.3
32.5°	234.3
35°	209.1
37.5°	181.3
40°	152.8
42.5°	126.3
45°	101.2
47.5°	78.7
50°	59.7
52.5°	44.1
55°	31.9
57.5°	22.4
60°	16.3
62.5°	12.2
65°	8.8
67.5°	6.8
70°	4.8
72.5°	3.4
75°	2.7
77.5°	1.3
80°	1.3
82.5°	0.7
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)