

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P859179

Luminaire Tested: **LX4C60D010 EX4C609027 4LBMLI**

Issue Date: 1/26/2022



Test Information

Test Method: LM-79-08
Report Number: P859179
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)
Test Lab: INNOVATION CENTER
Issue Date: 1/26/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C60D010 EX4C609027 4LBMLI
Description: 4 INCH 6000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 2700K, 90CRI LEDS
AND 4LBM TRIM WITH LI FINISH
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 5755.1 lumens
Efficiency: N/A
Efficacy: 79.9 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 72
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P859179

CATALOG NUMBER: LX4C60D010 EX4C609027 4LBMLI

Luminous Intensity Polar Plot

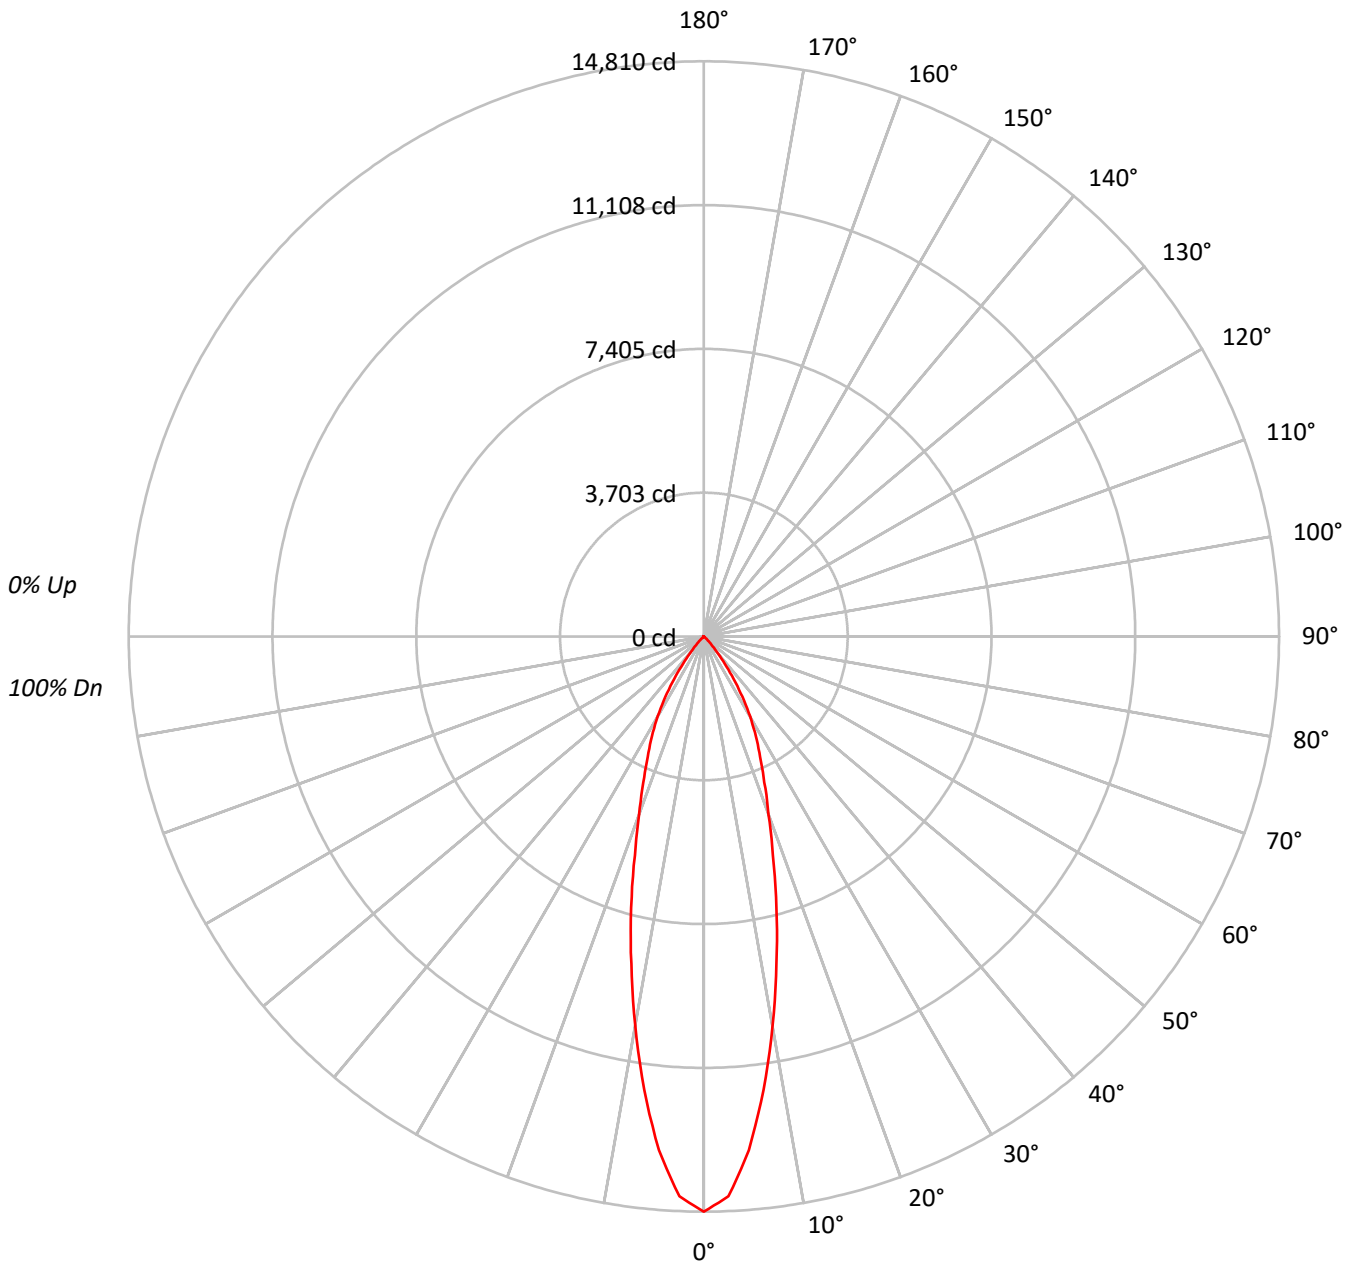



TEST NUMBER: P859179

CATALOG NUMBER: LX4C60D010 EX4C609027 4LBMLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	92	90	90	90	90
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85	85	85	85
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81	81	81	81
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77	77	77	77
6	92	85	80	76	91	84	79	76	83	78	75	81	78	75	80	77	74	73	73	73	73
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	69	69	69	69
8	85	77	72	68	84	77	72	68	76	71	68	75	71	68	74	70	67	66	66	66	66
9	82	74	69	65	81	73	68	65	72	68	65	72	68	65	71	67	64	63	63	63	63
10	79	71	66	62	78	70	65	62	69	65	62	69	65	62	68	64	62	61	61	61	61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1819472
5°	1637332
10°	1269293
15°	918712
20°	636132
25°	463757
30°	336958
35°	199394
40°	83859
45°	26148
50°	3402
55°	1906
60°	2187
65°	2587
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P859179

CATALOG NUMBER: LX4C60D010 EX4C609027 4LBMLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1167.1	20.3
10°-20°	1998.1	34.7
20°-30°	1588.0	27.6
30°-40°	840.6	14.6
40°-50°	144.8	2.5
50°-60°	10.9	0.2
60°-70°	5.4	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	4753.3	82.6
0°-40°	5593.9	97.2
0°-60°	5749.6	99.9
0°-90°	5755.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5755.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	14810	
5°	13277	###
15°	7223	1998
25°	3421	1588
35°	1330	841
45°	150	145
55°	9	11
65°	9	5
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P859179

CATALOG NUMBER: LX4C60D010 EX4C609027 4LBMLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	14810.1
2.5°	14428.8
5°	13276.8
7.5°	11770.2
10°	10174.8
12.5°	8632.7
15°	7223.3
17.5°	5911.5
20°	4865.7
22.5°	4068.0
25°	3421.2
27.5°	2898.3
30°	2375.3
32.5°	1843.5
35°	1329.5
37.5°	877.6
40°	522.9
42.5°	301.4
45°	150.5
47.5°	53.3
50°	17.8
52.5°	17.8
55°	8.9
57.5°	8.9
60°	8.9
62.5°	8.9
65°	8.9
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)