

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P859298

Luminaire Tested: **LD4C60D010 EU4609030 4LBMLI**

Issue Date: 1/26/2022



Test Information

Test Method: LM-79-08
Report Number: P859298
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)
Test Lab: INNOVATION CENTER
Issue Date: 1/26/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C60D010 EU4609030 4LBMLI
Description: 4 INCH 6000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS
AND 4LBM TRIM WITH LI FINISH, DIM TO WARM
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7000.0 lumens
Efficiency: N/A
Efficacy: 71.8 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 97.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P859298

CATALOG NUMBER: LD4C60D010 EU4609030 4LBMLI

Luminous Intensity Polar Plot

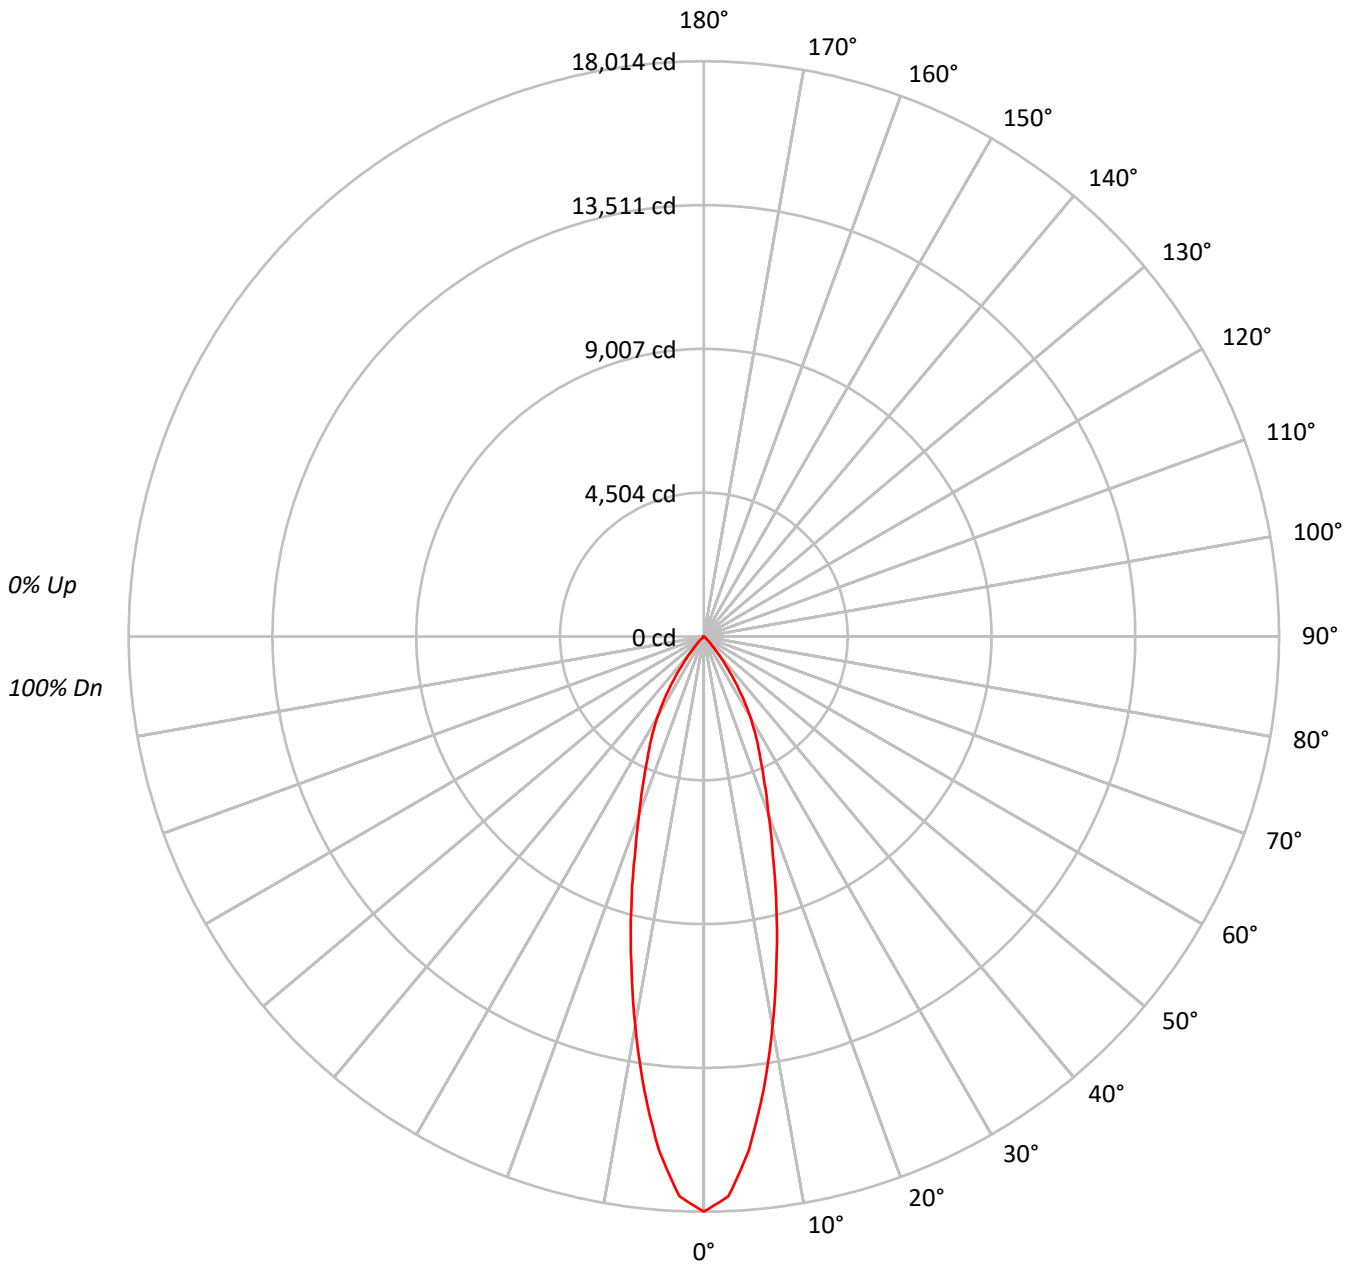



TEST NUMBER: P859298

CATALOG NUMBER: LD4C60D010 EU4609030 4LBMLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

| | | | | | | | | | | | | | | | | | | | | | |
|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| RF | 20 | | | | 20 | | | | 20 | | | | 20 | | | | 20 | | | | |
| RC | 80 | | | | 70 | | | | 50 | | | | 30 | | | | 10 | | | 0 | |
| RW | 70 | 50 | 30 | 10 | 70 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 50 | 30 | 10 | 0 |
| RCR | | | | | | | | | | | | | | | | | | | | | |
| 0 | 119 | 119 | 119 | 119 | 116 | 116 | 116 | 116 | 111 | 111 | 111 | 106 | 106 | 106 | 102 | 102 | 102 | 100 | 100 | 100 | 100 |
| 1 | 114 | 112 | 110 | 108 | 112 | 110 | 108 | 106 | 106 | 104 | 103 | 102 | 101 | 100 | 99 | 98 | 97 | 95 | 95 | 95 | 95 |
| 2 | 109 | 105 | 102 | 99 | 107 | 103 | 100 | 98 | 100 | 98 | 95 | 97 | 95 | 93 | 95 | 93 | 92 | 90 | 90 | 90 | 90 |
| 3 | 105 | 99 | 95 | 92 | 103 | 98 | 94 | 91 | 95 | 92 | 89 | 93 | 90 | 88 | 91 | 89 | 87 | 85 | 85 | 85 | 85 |
| 4 | 101 | 94 | 89 | 86 | 99 | 93 | 88 | 85 | 91 | 87 | 84 | 89 | 86 | 83 | 87 | 84 | 82 | 81 | 81 | 81 | 81 |
| 5 | 96 | 89 | 84 | 80 | 95 | 88 | 84 | 80 | 87 | 82 | 79 | 85 | 81 | 79 | 83 | 80 | 78 | 77 | 77 | 77 | 77 |
| 6 | 92 | 85 | 80 | 76 | 91 | 84 | 79 | 76 | 83 | 78 | 75 | 81 | 78 | 75 | 80 | 77 | 74 | 73 | 73 | 73 | 73 |
| 7 | 89 | 81 | 76 | 72 | 88 | 80 | 75 | 72 | 79 | 75 | 71 | 78 | 74 | 71 | 77 | 73 | 71 | 69 | 69 | 69 | 69 |
| 8 | 85 | 77 | 72 | 68 | 84 | 77 | 72 | 68 | 76 | 71 | 68 | 75 | 71 | 68 | 74 | 70 | 67 | 66 | 66 | 66 | 66 |
| 9 | 82 | 74 | 69 | 65 | 81 | 73 | 68 | 65 | 72 | 68 | 65 | 72 | 68 | 65 | 71 | 67 | 64 | 63 | 63 | 63 | 63 |
| 10 | 79 | 71 | 66 | 62 | 78 | 70 | 65 | 62 | 69 | 65 | 62 | 69 | 65 | 62 | 68 | 64 | 62 | 61 | 61 | 61 | 61 |

AVERAGE LUMINANCE (cd/sqm):

| | |
|-----|---------|
| | 0° |
| 0° | 2213070 |
| 5° | 1991539 |
| 10° | 1543890 |
| 15° | 1117455 |
| 20° | 773746 |
| 25° | 564080 |
| 30° | 409873 |
| 35° | 242527 |
| 40° | 102014 |
| 45° | 31812 |
| 50° | 4147 |
| 55° | 2313 |
| 60° | 2654 |
| 65° | 3140 |
| 70° | 0 |
| 75° | 0 |
| 80° | 0 |
| 85° | 0 |



TEST NUMBER: P859298

CATALOG NUMBER: LD4C60D010 EU4609030 4LBMLI

ZONAL LUMENS:

| Zone | Lumens | % Fixture |
|-----------|--------|-----------|
| 0°-10° | 1419.6 | 20.3 |
| 10°-20° | 2430.4 | 34.7 |
| 20°-30° | 1931.6 | 27.6 |
| 30°-40° | 1022.5 | 14.6 |
| 40°-50° | 176.2 | 2.5 |
| 50°-60° | 13.2 | 0.2 |
| 60°-70° | 6.6 | 0.1 |
| 70°-80° | 0.0 | 0.0 |
| 80°-90° | 0.0 | 0.0 |
| 90°-100° | 0.0 | 0.0 |
| 100°-110° | 0.0 | 0.0 |
| 110°-120° | 0.0 | 0.0 |
| 120°-130° | 0.0 | 0.0 |
| 130°-140° | 0.0 | 0.0 |
| 140°-150° | 0.0 | 0.0 |
| 150°-160° | 0.0 | 0.0 |
| 160°-170° | 0.0 | 0.0 |
| 170°-180° | 0.0 | 0.0 |
| 0°-30° | 5781.5 | 82.6 |
| 0°-40° | 6804.0 | 97.2 |
| 0°-60° | 6993.4 | 99.9 |
| 0°-90° | 7000.0 | 100.0 |
| 90°-120° | 0.0 | 0.0 |
| 90°-150° | 0.0 | 0.0 |
| 90°-180° | 0.0 | 0.0 |
| 0°-180° | 7000.0 | 100.0 |

CANDELA DISTRIBUTION:

| | 0° | Flux |
|-----|-------|------|
| 0° | 18014 | |
| 5° | 16149 | ### |
| 15° | 8786 | 2430 |
| 25° | 4161 | 1932 |
| 35° | 1617 | 1023 |
| 45° | 183 | 176 |
| 55° | 11 | 13 |
| 65° | 11 | 7 |
| 75° | 0 | 0 |
| 85° | 0 | 0 |
| 90° | 0 | |



TEST NUMBER: P859298

CATALOG NUMBER: LD4C60D010 EU4609030 4LBMLI

CANDELA DISTRIBUTION (FULL):

| 0° | |
|-------|---------|
| 0° | 18013.9 |
| 2.5° | 17550.1 |
| 5° | 16149.0 |
| 7.5° | 14316.4 |
| 10° | 12376.0 |
| 12.5° | 10500.1 |
| 15° | 8785.9 |
| 17.5° | 7190.3 |
| 20° | 5918.3 |
| 22.5° | 4948.0 |
| 25° | 4161.3 |
| 27.5° | 3525.2 |
| 30° | 2889.3 |
| 32.5° | 2242.3 |
| 35° | 1617.1 |
| 37.5° | 1067.4 |
| 40° | 636.1 |
| 42.5° | 366.6 |
| 45° | 183.1 |
| 47.5° | 64.8 |
| 50° | 21.7 |
| 52.5° | 21.7 |
| 55° | 10.8 |
| 57.5° | 10.8 |
| 60° | 10.8 |
| 62.5° | 10.8 |
| 65° | 10.8 |
| 67.5° | 0.0 |
| 70° | 0.0 |
| 72.5° | 0.0 |
| 75° | 0.0 |
| 77.5° | 0.0 |
| 80° | 0.0 |
| 82.5° | 0.0 |
| 85° | 0.0 |
| 87.5° | 0.0 |
| 90° | 0.0 |



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)