

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P859399

Luminaire Tested: **LX4C65D010 EX4C659040 4LBWH**

Issue Date: 2/8/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P859399  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P206636)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/8/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LX4C65D010 EX4C659040 4LBWH  
Description: 4 INCH 6500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, 90CRI LEDS  
AND 4LBW TRIM WITH H FINISH  
Light Source: -  
Ballast/Driver:


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 5663.0 lumens  
Efficiency: N/A  
Efficacy: 78.2 lumens/watt  
Spacing Criteria (0/90/45): 1.18 / 1.18 / 1.13  
Luminous Opening: Circular (Dia: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 72.4  
Input Voltage (V):  
Input Current (Ain): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P859399

CATALOG NUMBER: LX4C65D010 EX4C659040 4LBWH

### Luminous Intensity Polar Plot

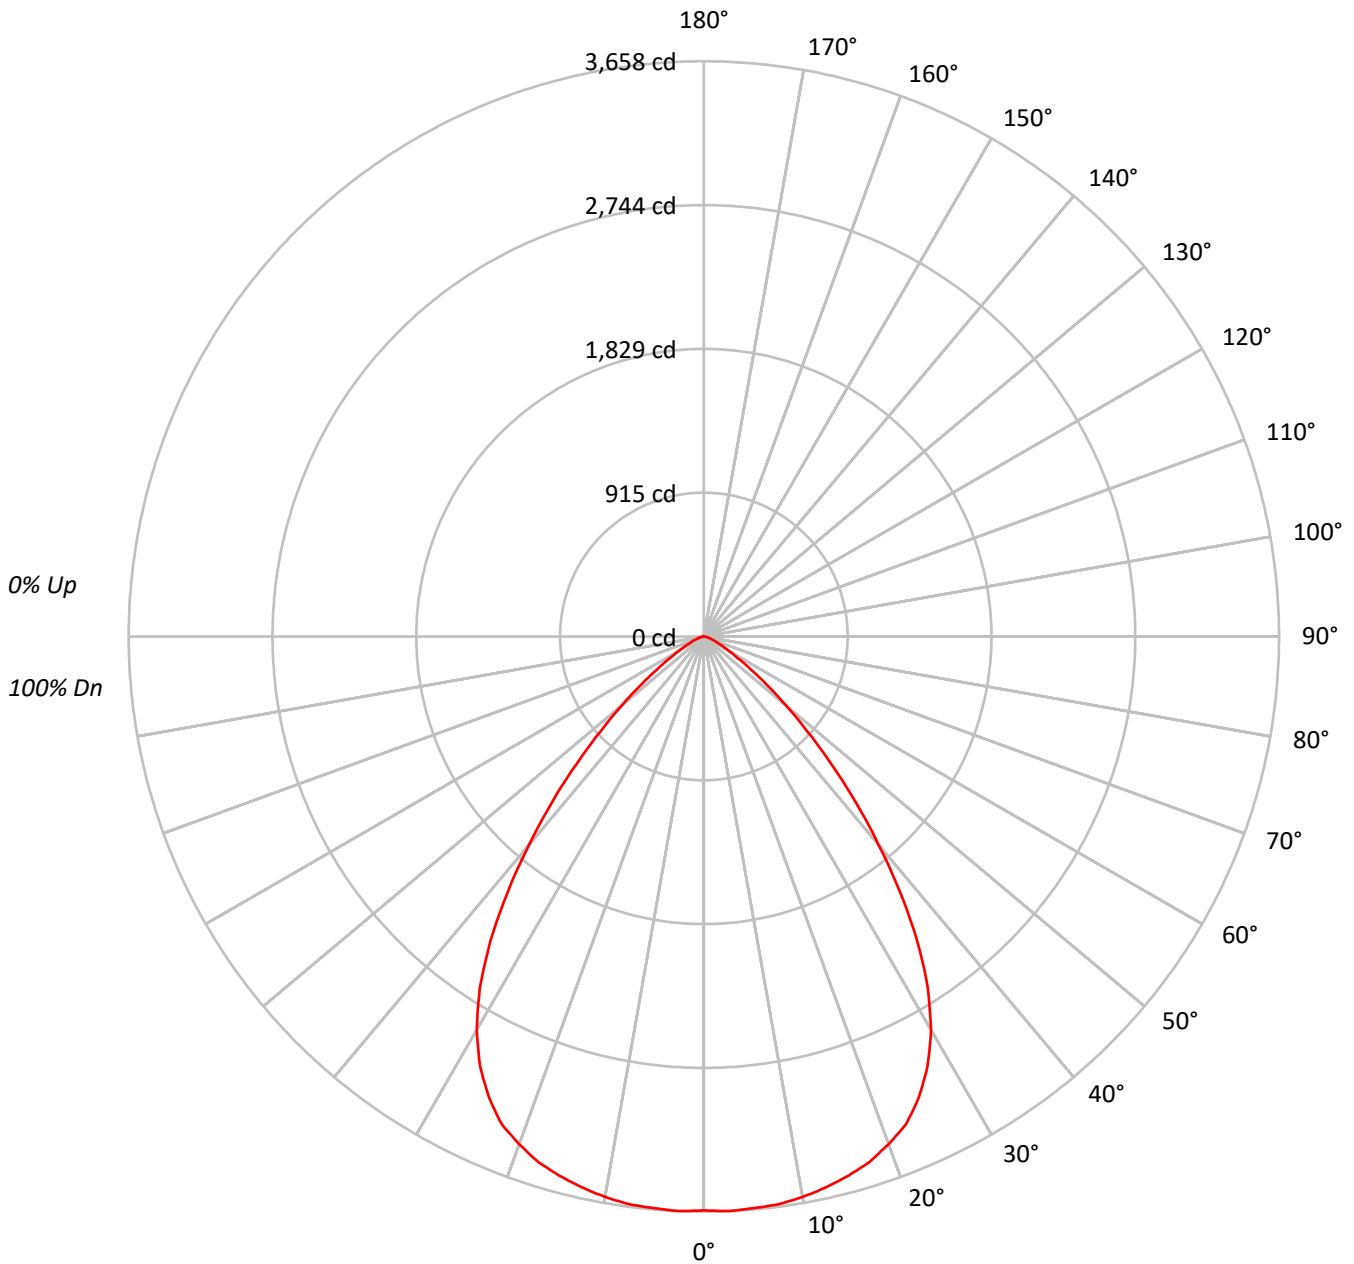



TEST NUMBER: P859399

CATALOG NUMBER: LX4C65D010 EX4C659040 4LBWH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	112	109	106	104	110	107	104	102	103	101	99	99	97	96	96	94	93	91																			
2	105	100	95	91	103	98	93	90	95	91	88	91	88	86	89	86	84	82																			
3	99	91	85	80	97	90	84	80	87	82	78	84	80	77	82	79	76	74																			
4	92	83	77	72	90	82	76	71	80	75	70	78	73	70	76	72	69	67																			
5	87	77	70	65	85	76	69	64	74	68	64	72	67	63	70	66	62	61																			
6	81	71	64	58	80	70	63	58	68	62	58	67	61	57	65	61	57	55																			
7	76	65	58	53	75	65	58	53	63	57	53	62	56	52	61	56	52	50																			
8	72	60	53	49	70	60	53	49	59	53	48	58	52	48	57	52	48	46																			
9	68	56	49	45	66	56	49	45	55	49	44	54	48	44	53	48	44	43																			
10	64	52	46	41	63	52	46	41	51	45	41	50	45	41	49	44	41	39																			

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	448427
5°	450140
10°	451515
15°	451528
20°	449059
25°	438530
30°	409873
35°	354934
40°	277270
45°	198934
50°	129239
55°	77365
60°	45284
65°	29070
70°	19325
75°	14620
80°	10895
85°	0



TEST NUMBER: P859399

CATALOG NUMBER: LX4C65D010 EX4C659040 4LBWH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	347.6	6.1
10°-20°	1001.6	17.7
20°-30°	1478.0	26.1
30°-40°	1458.5	25.8
40°-50°	892.6	15.8
50°-60°	342.2	6.0
60°-70°	107.0	1.9
70°-80°	31.4	0.6
80°-90°	4.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2827.2	49.9
0°-40°	4285.7	75.7
0°-60°	5520.4	97.5
0°-90°	5663.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	5663.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3650	
5°	3650	348
15°	3550	1002
25°	3235	1478
35°	2367	1459
45°	1145	893
55°	361	342
65°	100	107
75°	31	31
85°	0	4
90°	0	



TEST NUMBER: P859399

CATALOG NUMBER: LX4C65D010 EX4C659040 4LBWH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3650.1
2.5°	3657.8
5°	3650.1
7.5°	3642.5
10°	3619.4
12.5°	3588.6
15°	3550.1
17.5°	3504.0
20°	3434.8
22.5°	3358.2
25°	3235.1
27.5°	3081.3
30°	2889.3
32.5°	2651.2
35°	2366.6
37.5°	2051.6
40°	1728.9
42.5°	1429.3
45°	1145.0
47.5°	891.2
50°	676.2
52.5°	499.6
55°	361.2
57.5°	253.5
60°	184.3
62.5°	138.5
65°	100.0
67.5°	76.9
70°	53.8
72.5°	38.5
75°	30.8
77.5°	15.4
80°	15.4
82.5°	7.7
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)