

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P859505

Luminaire Tested: **LX4C70D010 EX4C709040 4LBNH**

Issue Date: 2/8/2022



Test Information

Test Method: LM-79-08
Report Number: P859505
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207666)
Test Lab: INNOVATION CENTER
Issue Date: 2/8/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C70D010 EX4C709040 4LBNH
Description: 4 INCH 7000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, 90CRI LEDS
AND 4LBN TRIM WITH H FINISH
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 4446.0 lumens
Efficiency: N/A
Efficacy: 57.0 lumens/watt
Spacing Criteria (0/90/45): 0.81 / 0.81 / 0.85
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 78
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P859505

CATALOG NUMBER: LX4C70D010 EX4C709040 4LBNH

Luminous Intensity Polar Plot

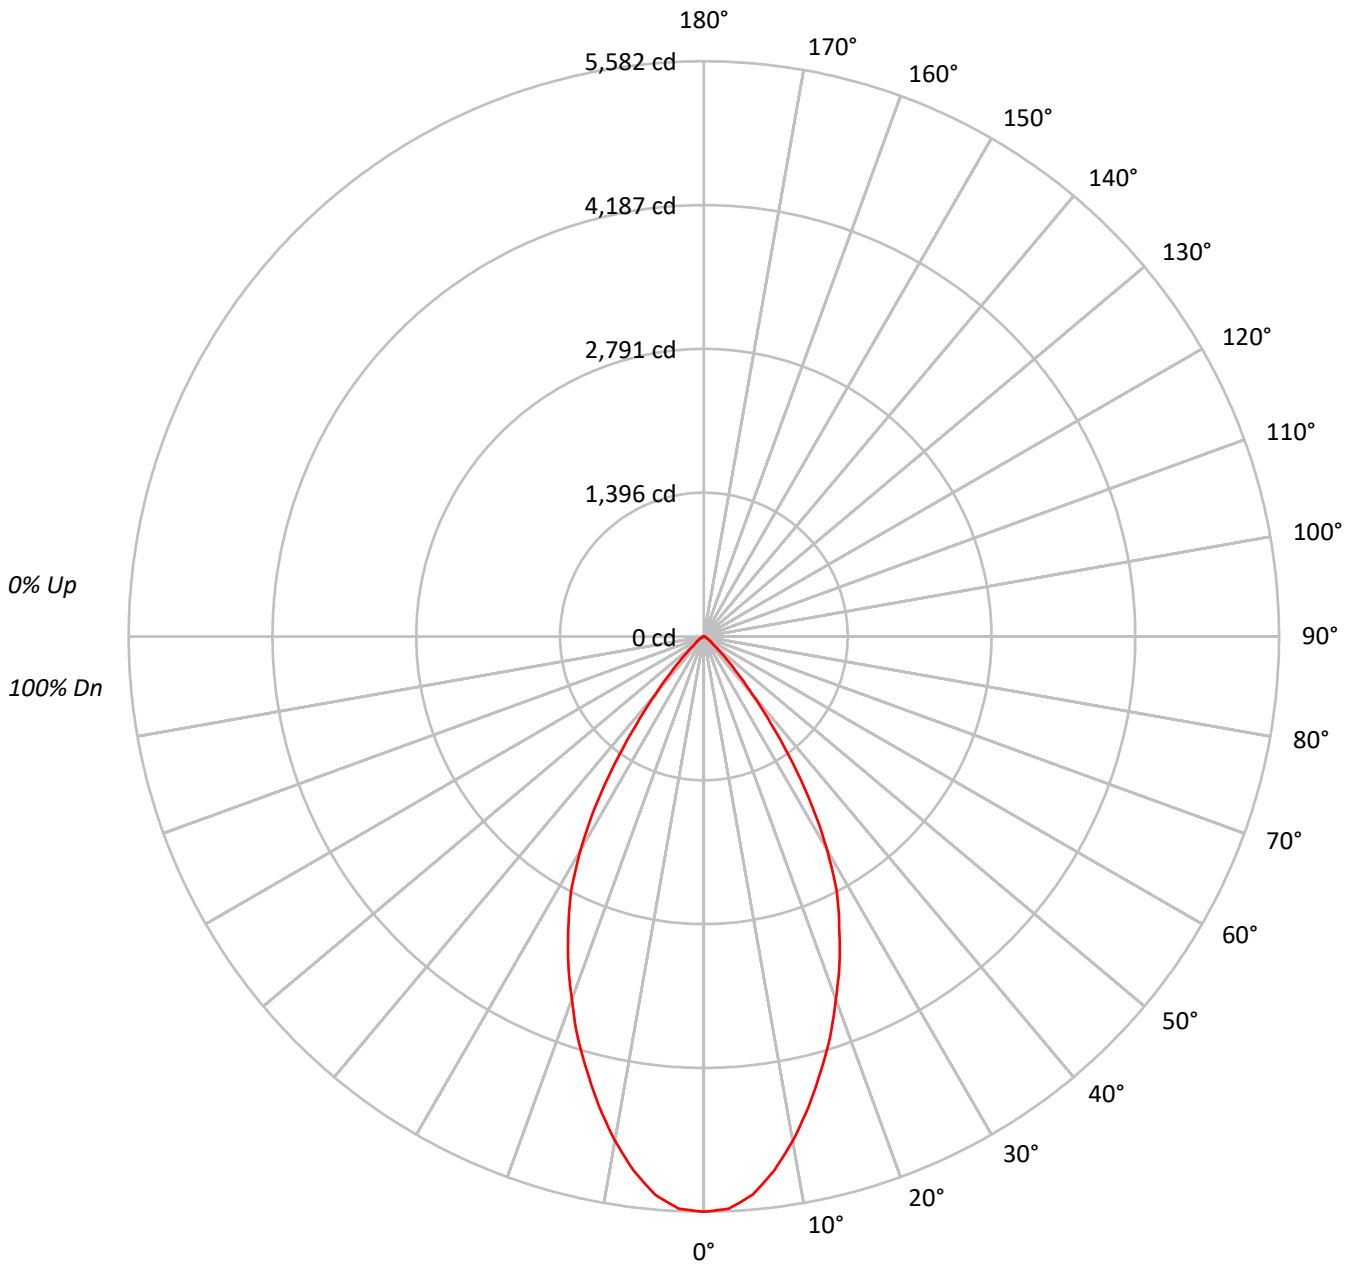



TEST NUMBER: P859505

CATALOG NUMBER: LX4C70D010 EX4C709040 4LBNH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			
1	113	111	108	106	111	109	106	104	105	103	101	101	99	98	97	96	95	93			
2	108	103	99	96	106	101	98	94	98	95	92	95	93	90	92	90	89	87			
3	102	96	91	87	100	95	90	86	92	88	85	90	86	84	87	85	82	81			
4	97	90	84	80	95	89	83	79	86	82	78	84	81	78	83	79	77	75			
5	92	84	78	74	91	83	78	73	81	76	73	80	75	72	78	74	72	70			
6	88	79	73	69	86	78	72	68	77	72	68	75	71	67	74	70	67	65			
7	83	74	68	64	82	73	68	64	72	67	63	71	66	63	70	66	63	61			
8	79	70	64	60	78	69	64	60	68	63	59	67	63	59	66	62	59	58			
9	76	66	60	56	74	65	60	56	65	59	56	64	59	56	63	59	55	54			
10	72	62	57	53	71	62	56	53	61	56	53	60	56	52	60	55	52	51			

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	685780
5°	670518
10°	619964
15°	556304
20°	489705
25°	421437
30°	339369
35°	225924
40°	117522
45°	53200
50°	23088
55°	15486
60°	9927
65°	7035
70°	5819
75°	3845
80°	0
85°	0



TEST NUMBER: P859505

CATALOG NUMBER: LX4C70D010 EX4C709040 4LBNH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	503.6	11.3
10°-20°	1221.7	27.5
20°-30°	1418.4	31.9
30°-40°	939.3	21.1
40°-50°	263.4	5.9
50°-60°	66.2	1.5
60°-70°	24.9	0.6
70°-80°	8.5	0.2
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	3143.7	70.7
0°-40°	4083.0	91.8
0°-60°	4412.6	99.2
0°-90°	4446.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	4446.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	5582	
5°	5437	504
15°	4374	1222
25°	3109	1418
35°	1506	939
45°	306	263
55°	72	66
65°	24	25
75°	8	9
85°	0	0
90°	0	



TEST NUMBER: P859505

CATALOG NUMBER: LX4C70D010 EX4C709040 4LBNH

CANDELA DISTRIBUTION (FULL):

	0°
0°	5582.1
2.5°	5557.9
5°	5437.1
7.5°	5227.5
10°	4969.7
12.5°	4679.7
15°	4373.9
17.5°	4075.7
20°	3745.7
22.5°	3439.5
25°	3109.0
27.5°	2795.1
30°	2392.3
32.5°	1965.4
35°	1506.4
37.5°	1079.4
40°	732.8
42.5°	475.1
45°	306.2
47.5°	185.4
50°	120.8
52.5°	88.5
55°	72.3
57.5°	56.5
60°	40.4
62.5°	32.3
65°	24.2
67.5°	16.2
70°	16.2
72.5°	8.1
75°	8.1
77.5°	8.1
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)