

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P859581

Luminaire Tested: **LD4C75D010 EU4759040 4LBMLI**

Issue Date: 7/19/2024



Test Information

Test Method: LM-79-08
Report Number: P859581
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208178)
Test Lab: INNOVATION CENTER
Issue Date: 7/19/2024
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C75D010 EU4759040 4LBMLI
Description: 4 INCH 7500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 4000K, 90CRI LEDS
AND 4LBM TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 7849.0 lumens
Efficiency: N/A
Efficacy: 96.3 lumens/watt
Spacing Criteria (0/90/45): 0.7 / 0.7 / 0.76
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 81.5
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P859581

CATALOG NUMBER: LD4C75D010 EU4759040 4LBMLI

Luminous Intensity Polar Plot

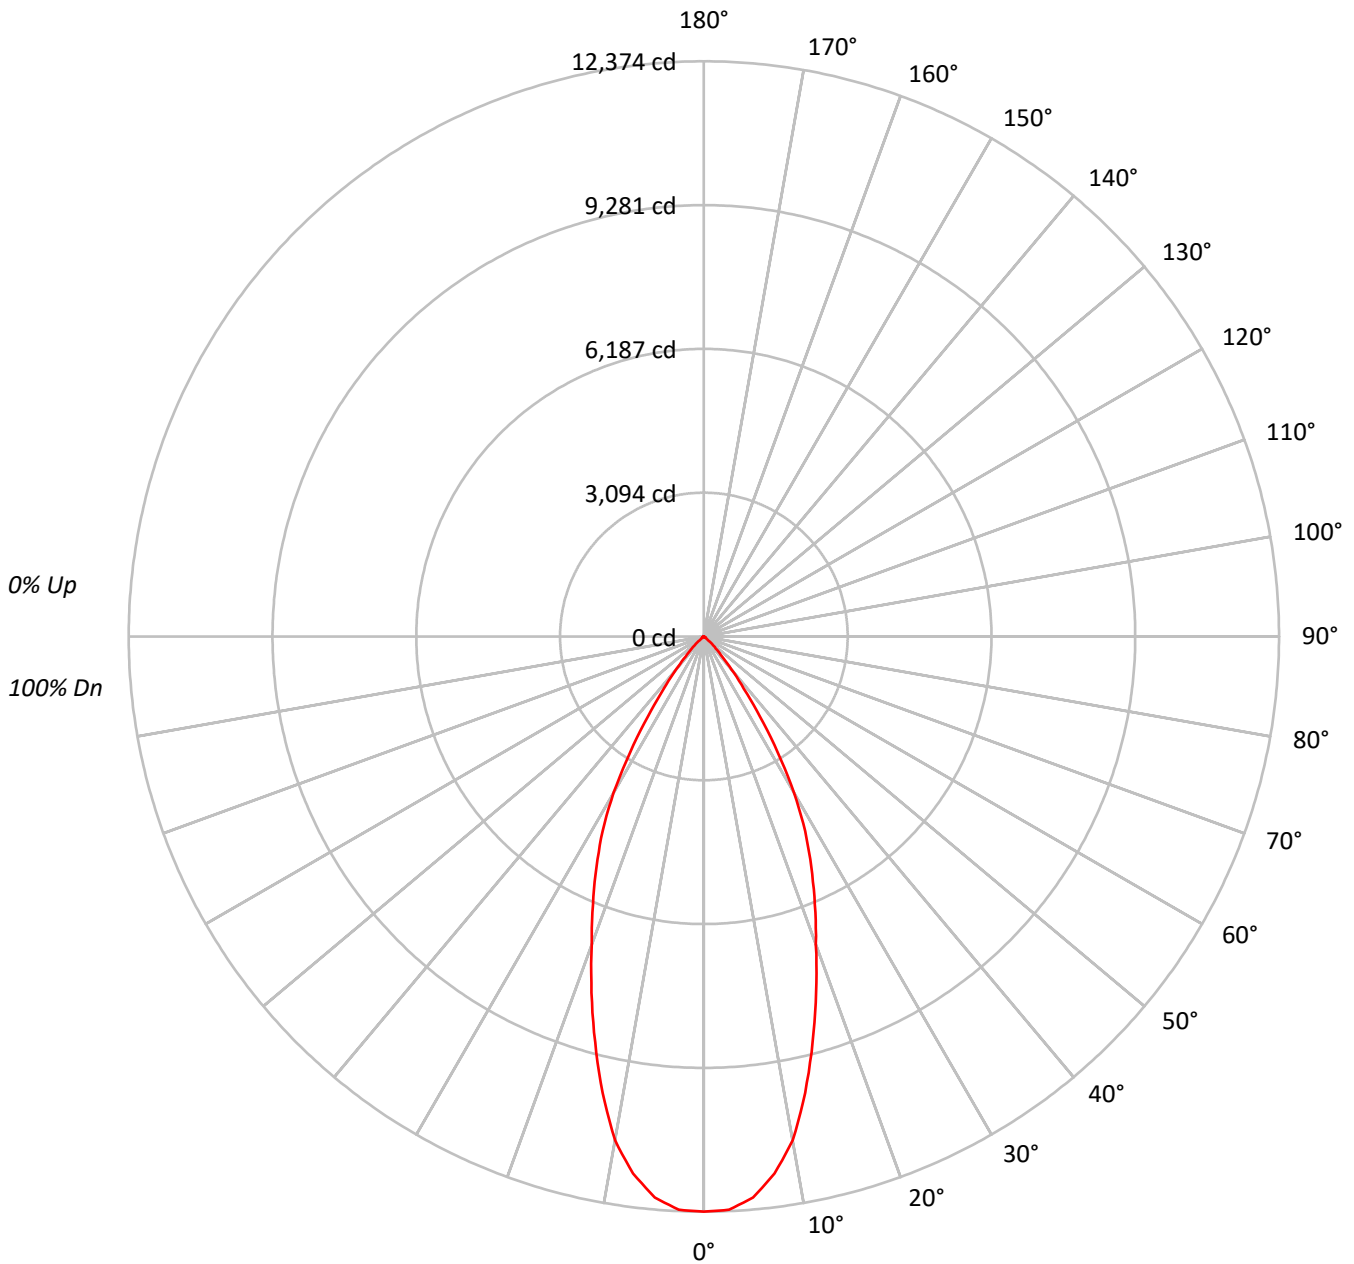



TEST NUMBER: P859581

CATALOG NUMBER: LD4C75D010 EU4759040 4LBMLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20	
RC	80				70				50				30				10	0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																		
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100
1	114	111	109	107	111	109	107	105	105	103	102	101	100	99	98	97	96	94
2	109	104	100	97	107	102	99	96	99	96	94	96	94	92	94	92	90	88
3	104	98	93	89	102	96	92	89	94	90	87	91	88	86	89	87	85	83
4	99	92	87	83	97	91	86	82	89	85	81	87	83	80	85	82	79	78
5	94	87	81	77	93	86	81	77	84	79	76	82	78	75	81	77	75	73
6	90	82	76	72	89	81	76	72	80	75	71	78	74	71	77	73	71	69
7	86	77	72	68	85	77	71	68	75	71	67	74	70	67	73	69	67	65
8	82	73	68	64	81	73	67	64	72	67	64	71	66	63	70	66	63	62
9	79	70	64	60	78	69	64	60	68	63	60	67	63	60	67	63	60	58
10	75	66	61	57	74	66	61	57	65	60	57	64	60	57	64	60	57	56

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	1520127
5°	1494289
10°	1373009
15°	1149824
20°	921193
25°	740164
30°	550994
35°	314770
40°	147720
45°	62721
50°	19973
55°	10174
60°	7003
65°	5523
70°	3412
75°	0
80°	0
85°	0



TEST NUMBER: P859581

CATALOG NUMBER: LD4C75D010 EU4759040 4LBMLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1120.3	14.3
10°-20°	2504.7	31.9
20°-30°	2490.2	31.7
30°-40°	1356.1	17.3
40°-50°	313.4	4.0
50°-60°	44.2	0.6
60°-70°	16.4	0.2
70°-80°	3.7	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6115.2	77.9
0°-40°	7471.3	95.2
0°-60°	7828.9	99.7
0°-90°	7849.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	7849.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	12374	
5°	12117	###
15°	9040	2505
25°	5460	2490
35°	2099	1356
45°	361	313
55°	48	44
65°	19	16
75°	0	4
85°	0	0
90°	0	



TEST NUMBER: P859581

CATALOG NUMBER: LD4C75D010 EU4759040 4LBMLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	12373.5
2.5°	12345.0
5°	12116.9
7.5°	11651.8
10°	11006.2
12.5°	10056.6
15°	9040.4
17.5°	8033.8
20°	7046.1
22.5°	6239.0
25°	5460.3
27.5°	4719.7
30°	3884.1
32.5°	2953.4
35°	2098.8
37.5°	1414.8
40°	921.1
42.5°	579.1
45°	361.0
47.5°	209.0
50°	104.5
52.5°	57.0
55°	47.5
57.5°	28.5
60°	28.5
62.5°	19.0
65°	19.0
67.5°	9.5
70°	9.5
72.5°	9.5
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)