

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P859601

Luminaire Tested: **LX4C75D010 EX4C759050 4LBMLI**

Issue Date: 1/26/2022

Test Information

Test Method: LM-79-08
Report Number: P859601
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P208279)
Test Lab: INNOVATION CENTER
Issue Date: 1/26/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LX4C75D010 EX4C759050 4LBMLI
Description: 4 INCH 7500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 5000K, 90CRI LEDS
AND 4LBM TRIM WITH LI FINISH
Light Source: -
Ballast/Driver:

Summary


Lumens per Lamp: N/A
Luminaire Lumens: 8011.1 lumens
Efficiency: N/A
Efficacy: 98.3 lumens/watt
Spacing Criteria (0/90/45): 0.48 / 0.48 / 0.54
Luminous Opening: Circular (Dia: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 81.5
Input Voltage (V):
Input Current (Ain): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P859601

CATALOG NUMBER: LX4C75D010 EX4C759050 4LBMLI

Luminous Intensity Polar Plot

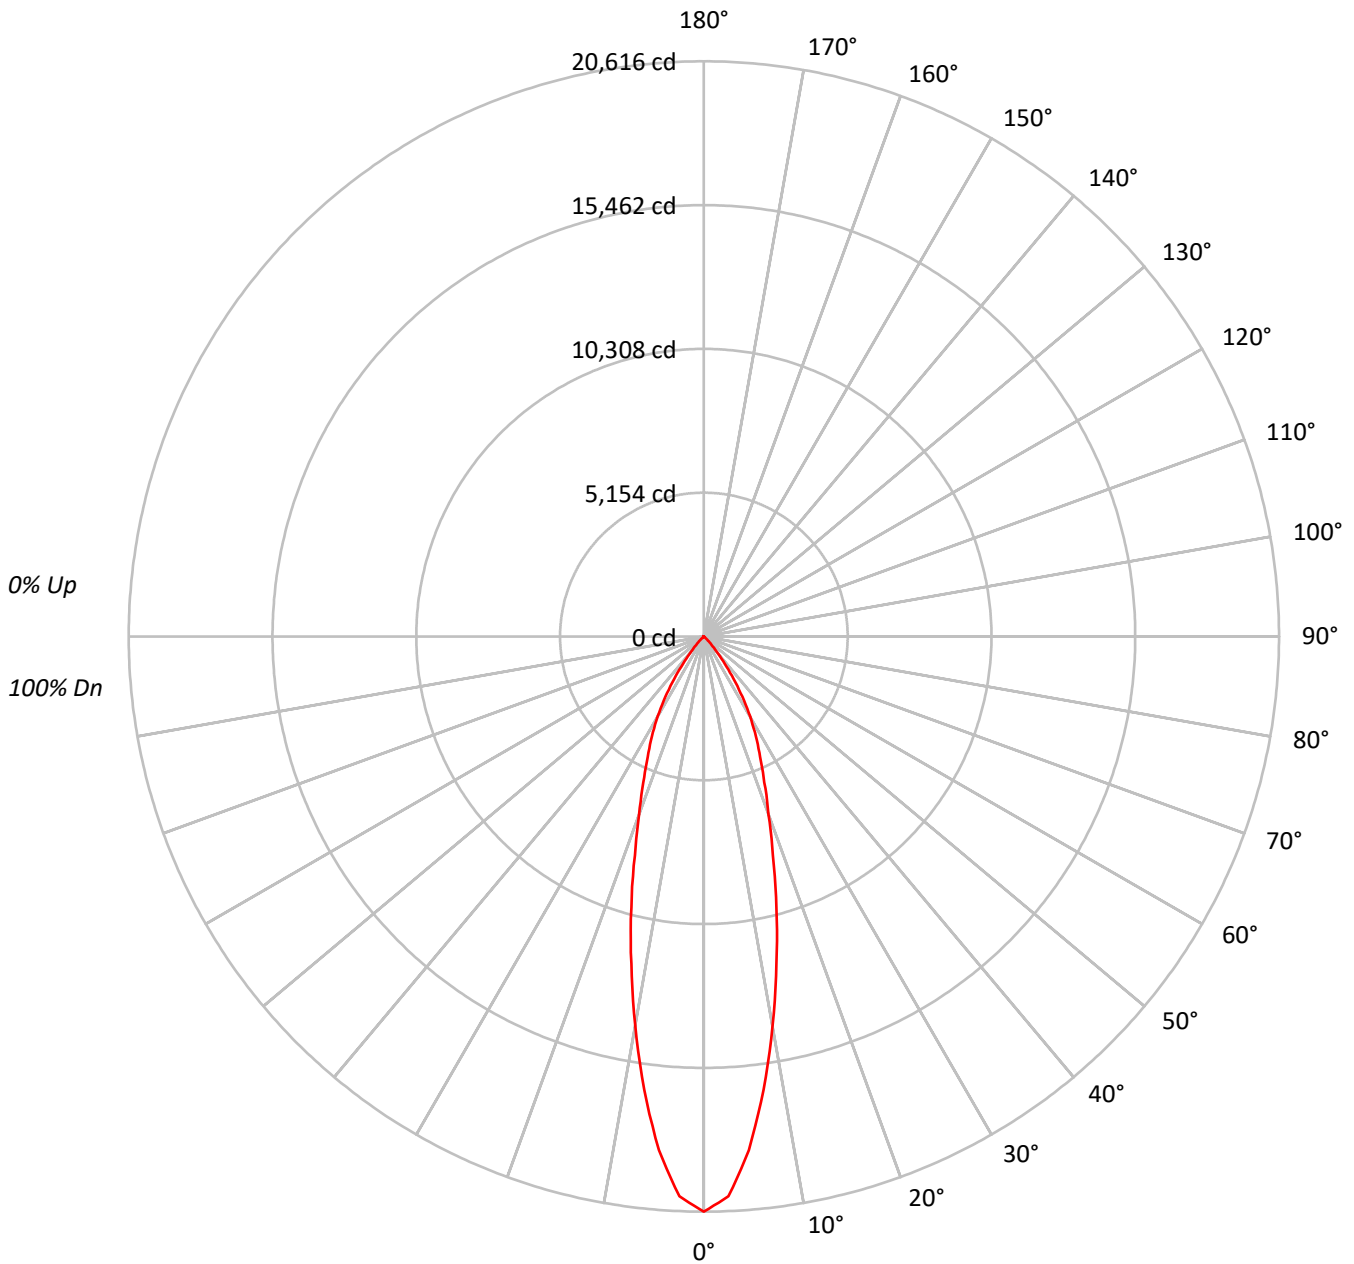



TEST NUMBER: P859601

CATALOG NUMBER: LX4C75D010 EX4C759050 4LBMLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	114	112	110	108	112	110	108	106	106	104	103	102	101	100	99	98	97	95	95	95	95
2	109	105	102	99	107	103	100	98	100	98	95	97	95	93	95	93	92	90	90	90	90
3	105	99	95	92	103	98	94	91	95	92	89	93	90	88	91	89	87	85	85	85	85
4	101	94	89	86	99	93	88	85	91	87	84	89	86	83	87	84	82	81	81	81	81
5	96	89	84	80	95	88	84	80	87	82	79	85	81	79	83	80	78	77	77	77	77
6	92	85	80	76	91	84	79	76	83	78	75	81	78	75	80	77	74	73	73	73	73
7	89	81	76	72	88	80	75	72	79	75	71	78	74	71	77	73	71	69	69	69	69
8	85	77	72	68	84	77	72	68	76	71	68	75	71	68	74	70	67	66	66	66	66
9	82	74	69	65	81	73	68	65	72	68	65	72	68	65	71	67	64	63	63	63	63
10	79	71	66	62	78	70	65	62	69	65	62	69	65	62	68	64	62	61	61	61	61

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	2532710
5°	2279177
10°	1766866
15°	1278843
20°	885501
25°	645548
30°	469057
35°	277561
40°	116736
45°	36399
50°	4721
55°	2656
60°	3047
65°	3605
70°	0
75°	0
80°	0
85°	0



TEST NUMBER: P859601

CATALOG NUMBER: LX4C75D010 EX4C759050 4LBMLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	1624.6	20.3
10°-20°	2781.4	34.7
20°-30°	2210.5	27.6
30°-40°	1170.2	14.6
40°-50°	201.6	2.5
50°-60°	15.1	0.2
60°-70°	7.6	0.1
70°-80°	0.0	0.0
80°-90°	0.0	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	6616.6	82.6
0°-40°	7786.8	97.2
0°-60°	8003.5	99.9
0°-90°	8011.1	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	8011.1	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	20616	
5°	18481	###
15°	10055	2781
25°	4762	2211
35°	1851	1170
45°	210	202
55°	12	15
65°	12	8
75°	0	0
85°	0	0
90°	0	



TEST NUMBER: P859601

CATALOG NUMBER: LX4C75D010 EX4C759050 4LBMLI

CANDELA DISTRIBUTION (FULL):

	0°
0°	20615.7
2.5°	20085.0
5°	18481.4
7.5°	16384.2
10°	14163.4
12.5°	12016.7
15°	10054.8
17.5°	8228.9
20°	6773.1
22.5°	5662.7
25°	4762.3
27.5°	4034.4
30°	3306.5
32.5°	2566.2
35°	1850.7
37.5°	1221.6
40°	727.9
42.5°	419.6
45°	209.5
47.5°	74.1
50°	24.7
52.5°	24.7
55°	12.4
57.5°	12.4
60°	12.4
62.5°	12.4
65°	12.4
67.5°	0.0
70°	0.0
72.5°	0.0
75°	0.0
77.5°	0.0
80°	0.0
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)