

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P#

Luminaire Tested: **LD4C20D010 EX4C209030 4LCSQWLI**

Issue Date: 2/18/2022

Test Information

Test Method: LM-79-08
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-13)
Test Lab: INNOVATION CENTER
Issue Date: 2/18/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C20D010 EX4C209030 4LCSQWLI
Description: 4 INCH 2000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS
AND 4LCSQW TRIM WITH LI FINISH
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 1530.0 lumens
Efficiency: N/A
Efficacy: 70.2 lumens/watt
Spacing Criteria (0/90/45): 0.91 / 0.91 / 0.9
Luminous Opening: Rectangular (W 0.33' x L: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 21.8
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P#
CATALOG NUMBER: LD4C20D010 EX4C209030 4LCSQWLI

Luminous Intensity Polar Plot

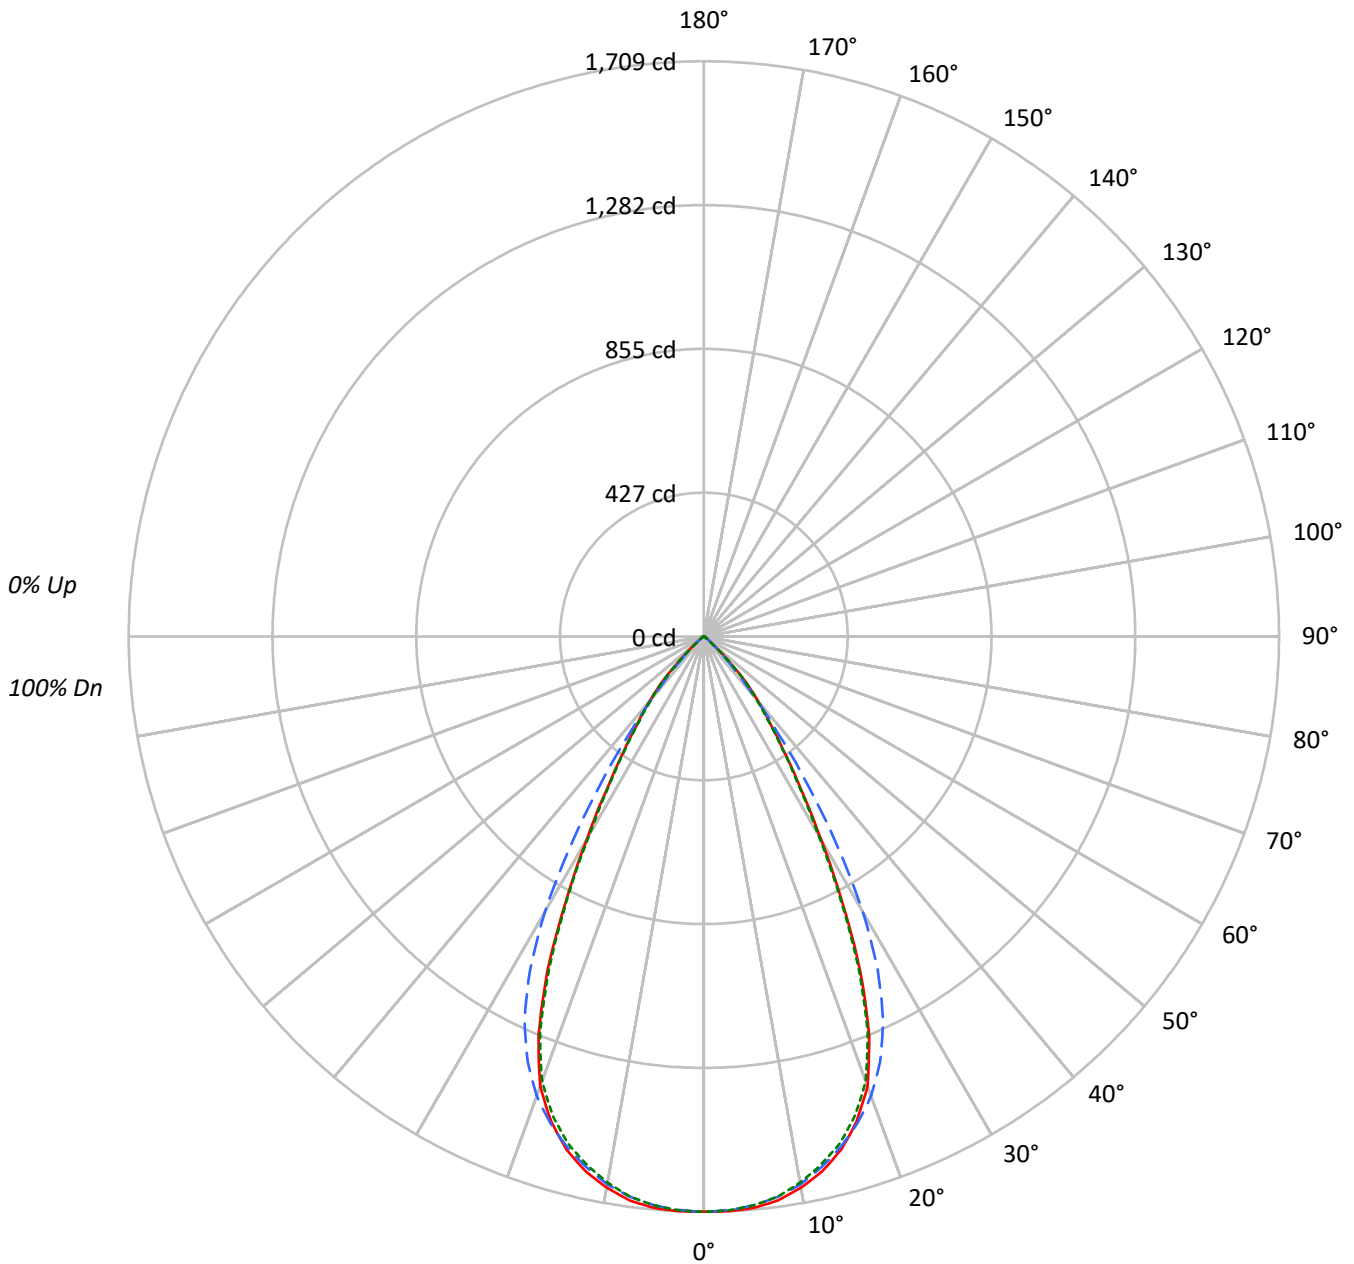



TEST NUMBER: P#

CATALOG NUMBER: LD4C20D010 EX4C209030 4LCSQWLI

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20									20									20									20									
RC	80									50									30									10									0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0																
RCR																																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100																			
1	114	111	108	106	111	109	106	104	105	103	101	101	100	98	97	96	95	94																			
2	108	103	99	96	106	102	98	95	98	95	93	95	93	91	93	91	89	87																			
3	103	96	91	88	101	95	90	87	92	89	85	90	87	84	88	85	83	81																			
4	98	90	85	80	96	89	84	80	87	82	79	85	81	78	83	80	77	76																			
5	93	84	79	74	91	84	78	74	82	77	73	80	76	73	79	75	72	71																			
6	88	79	73	69	87	79	73	69	77	72	68	76	71	68	74	71	68	66																			
7	84	75	69	65	82	74	68	64	73	68	64	71	67	64	70	66	63	62																			
8	80	70	64	60	79	70	64	60	69	64	60	68	63	60	67	63	59	58																			
9	76	66	61	57	75	66	60	57	65	60	56	64	60	56	63	59	56	55																			
10	72	63	57	53	71	62	57	53	62	57	53	61	56	53	60	56	53	52																			

AVERAGE LUMINANCE (cd/sqm):

	0°	45°	90°
0°	164900	164900	164900
5°	165074	164319	164319
10°	162907	161947	161447
15°	157621	156871	155813
20°	145972	149165	144360
25°	117376	134176	115822
30°	77467	105199	75629
35°	48424	63171	47541
40°	31603	29272	30368
45°	15215	11681	14355
50°	3828	4653	3588
55°	2120	1918	2052
60°	1447	1216	1370
65°	982	890	982
70°	762	677	762
75°	596	596	596
80°	445	667	667
85°	443	886	886



TEST NUMBER: P#

CATALOG NUMBER: LD4C20D010 EX4C209030 4LCSQWLI

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	160.7	10.5
10°-20°	438.9	28.7
20°-30°	523.1	34.2
30°-40°	296.2	19.4
40°-50°	91.6	6.0
50°-60°	12.7	0.8
60°-70°	4.3	0.3
70°-80°	1.7	0.1
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1122.7	73.4
0°-40°	1418.9	92.7
0°-60°	1523.2	99.6
0°-90°	1530.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1530.0	100.0

CANDELA DISTRIBUTION:

	0°	22.5°	45°	67.5°	90°	Flux
0°	1709	1709	1709	1709	1709	
5°	1704	1700	1696	1695	1696	161
15°	1578	1575	1570	1564	1560	440
25°	1102	1167	1260	1169	1088	492
35°	411	448	536	450	404	268
45°	112	130	86	126	105	92
55°	13	13	11	12	12	12
65°	4	4	4	4	4	5
75°	2	2	2	2	2	2
85°	0	1	1	1	1	1
90°	0	0	0	0	0	



TEST NUMBER: P#

CATALOG NUMBER: LD4C20D010 EX4C209030 4LCSQWLI

CANDELA DISTRIBUTION (FULL):

	0°	22.5°	45°	67.5°	90°
0°	1709.0	1709.0	1709.0	1709.0	1709.0
2.5°	1709.4	1706.7	1705.9	1705.1	1706.7
5°	1704.3	1700.4	1696.5	1695.3	1696.5
7.5°	1689.8	1685.9	1679.2	1677.6	1678.8
10°	1662.7	1659.2	1652.9	1649.4	1647.8
12.5°	1627.0	1621.1	1615.2	1611.3	1607.4
15°	1577.9	1575.2	1570.4	1564.2	1559.8
17.5°	1510.0	1513.9	1516.7	1504.1	1492.7
20°	1421.6	1436.2	1452.7	1427.1	1405.9
22.5°	1283.8	1325.5	1367.5	1319.2	1272.1
25°	1102.5	1166.8	1260.3	1168.8	1087.9
27.5°	890.8	972.5	1119.7	972.9	879.1
30°	695.3	779.3	944.2	768.3	678.8
32.5°	534.0	596.8	737.7	587.3	522.6
35°	411.1	448.4	536.3	449.5	403.6
37.5°	319.6	338.4	360.8	331.8	310.2
40°	250.9	251.7	232.4	247.7	241.1
42.5°	186.1	185.3	142.9	180.6	181.8
45°	111.5	130.0	85.6	126.4	105.2
47.5°	53.0	73.4	51.4	69.5	49.1
50°	25.5	35.3	31.0	33.0	23.9
52.5°	17.3	18.1	17.7	17.3	16.5
55°	12.6	12.6	11.4	12.2	12.2
57.5°	9.4	9.4	8.2	9.0	9.0
60°	7.5	7.1	6.3	7.1	7.1
62.5°	5.5	5.5	4.7	5.5	5.5
65°	4.3	4.3	3.9	4.3	4.3
67.5°	3.5	3.5	2.7	3.5	3.1
70°	2.7	2.7	2.4	2.7	2.7
72.5°	2.0	2.0	2.0	2.0	2.0
75°	1.6	1.6	1.6	1.6	1.6
77.5°	1.2	1.2	1.2	1.2	1.2
80°	0.8	0.8	1.2	1.2	1.2
82.5°	0.8	0.8	0.8	0.8	0.8
85°	0.4	0.8	0.8	0.8	0.8
87.5°	0.4	0.4	0.8	0.8	0.8
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180° - - 45°-225° - - - - 90°-270°







(END OF REPORT)