

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P563820

Luminaire Tested: **LD4C30D010 EX4C309030 4LCSQWH**

Issue Date: 2/18/2022



**Test Information**

Test Method: LM-79-08  
Report Number: P563820  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (G1-2105-247-14)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/18/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD4C30D010 EX4C309030 4LCSQWH  
Description: 4 INCH 3000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS  
AND 4LCSQW TRIM WITH H FINISH, DIM TO WARM  
Light Source: -  
Ballast/Driver: -


**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 1942.0 lumens  
Efficiency: N/A  
Efficacy: 61.5 lumens/watt  
Spacing Criteria (0/90/45): 0.93 / 0.93 / 0.94  
Luminous Opening: Rectangular (W 0.33' x L: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 31.6  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P563820

CATALOG NUMBER: LD4C30D010 EX4C309030 4LCSQWH

### Luminous Intensity Polar Plot

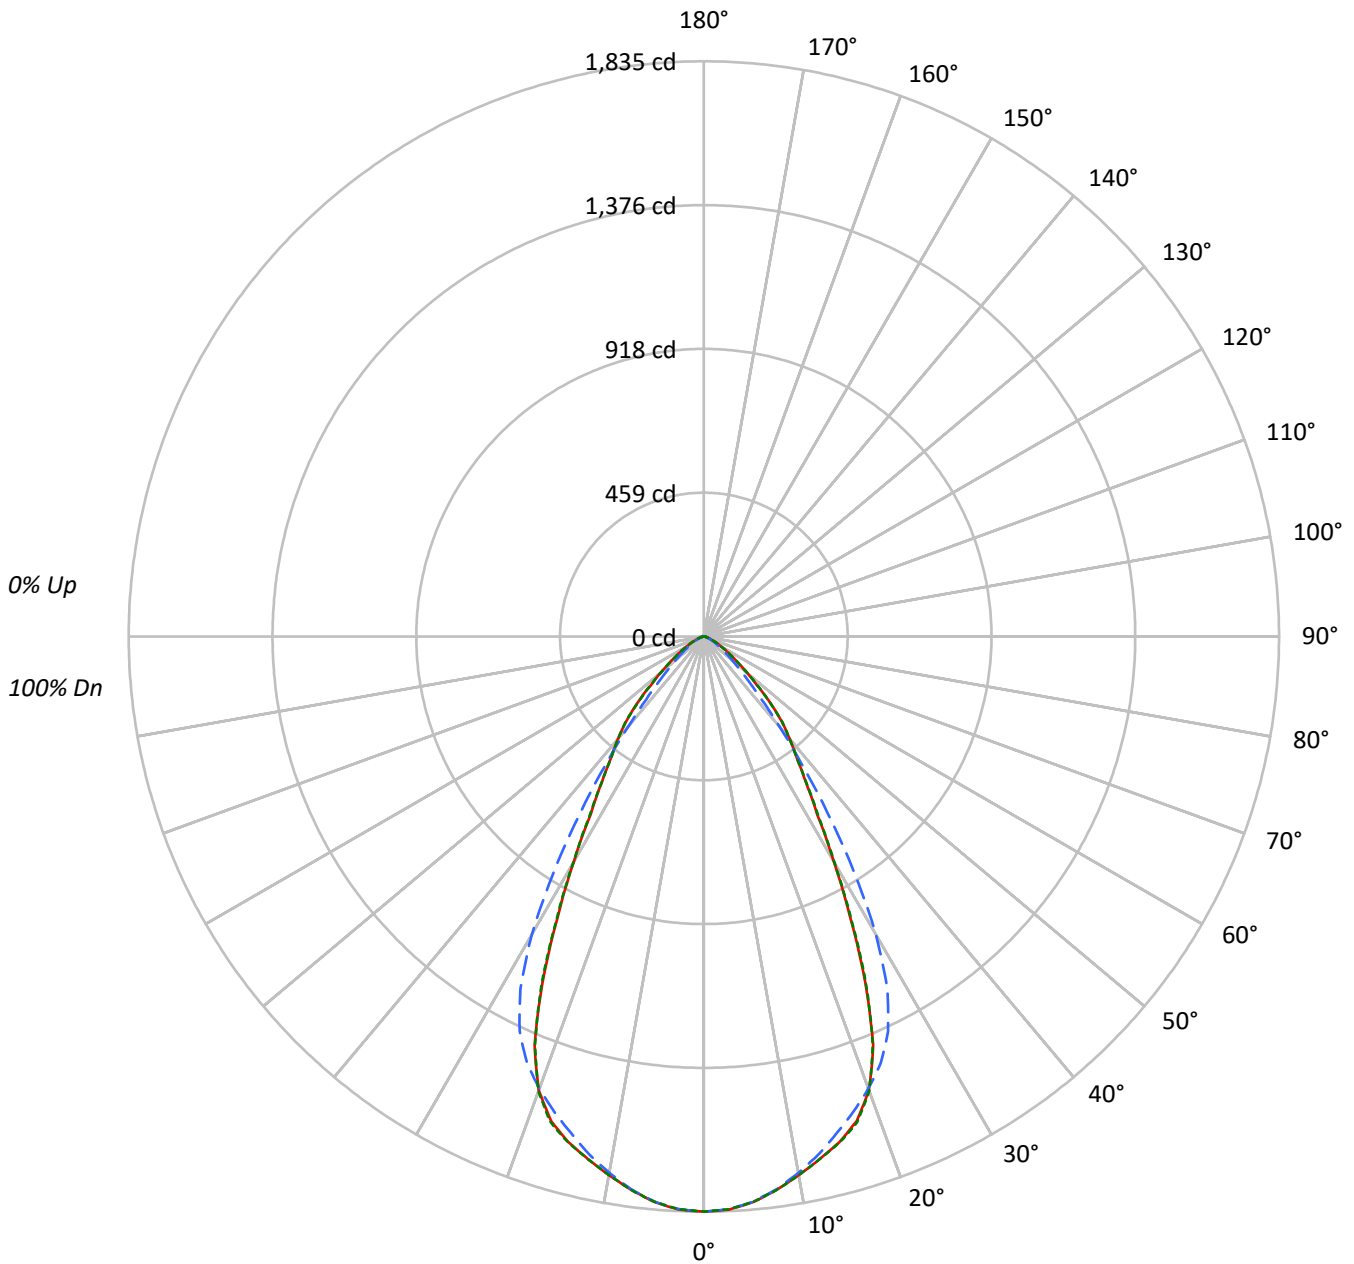



TEST NUMBER: P563820

CATALOG NUMBER: LD4C30D010 EX4C309030 4LCSQWH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20					20					20					20					20					
RC	80					70					50					30					10					0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0					
RCR																										
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100				100				
1	113	110	107	105	110	108	105	103	104	102	100	100	98	97	96	95	94	92				92				
2	107	101	97	93	104	99	95	92	96	93	90	93	90	88	90	88	86	84				84				
3	101	93	88	84	98	92	87	83	89	85	82	87	83	80	85	82	79	77				77				
4	95	87	80	76	93	85	80	75	83	78	74	81	77	74	79	76	73	71				71				
5	89	80	74	69	88	79	73	69	78	72	68	76	71	68	74	70	67	66				66				
6	85	75	68	64	83	74	68	63	72	67	63	71	66	63	70	65	62	61				61				
7	80	70	63	59	79	69	63	59	68	62	58	67	62	58	65	61	58	56				56				
8	76	65	59	55	74	65	59	54	64	58	54	63	58	54	62	57	54	52				52				
9	72	61	55	51	71	61	55	51	60	54	51	59	54	50	58	54	50	49				49				
10	68	58	52	48	67	57	51	47	57	51	47	56	51	47	55	50	47	46				46				

**AVERAGE LUMINANCE (cd/sqm):**

	0°	45°	90°
0°	177038	177038	177038
5°	175419	175302	175360
10°	170931	170246	170931
15°	166811	163804	166991
20°	158160	157565	158458
25°	129737	148027	130418
30°	92509	122301	92642
35°	66729	81040	66929
40°	53494	47083	53494
45°	40814	27482	40500
50°	26930	17548	26840
55°	18101	11776	17916
60°	12177	8047	12273
65°	8333	5685	8196
70°	5558	4091	5558
75°	3653	3020	3653
80°	2556	2278	2556
85°	1882	1882	1882



TEST NUMBER: P563820

CATALOG NUMBER: LD4C30D010 EX4C309030 4LCSQWH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	170.6	8.8
10°-20°	465.1	23.9
20°-30°	581.4	29.9
30°-40°	391.1	20.1
40°-50°	206.5	10.6
50°-60°	84.0	4.3
60°-70°	31.1	1.6
70°-80°	10.1	0.5
80°-90°	2.2	0.1
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	1217.1	62.7
0°-40°	1608.2	82.8
0°-60°	1898.7	97.8
0°-90°	1942.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	1942.0	100.0

**CANDELA DISTRIBUTION:**

	0°	22.5°	45°	67.5°	90°	Flux
0°	1835	1835	1835	1835	1835	
5°	1811	1809	1810	1810	1810	171
15°	1670	1656	1640	1656	1672	468
25°	1219	1287	1390	1289	1225	548
35°	566	595	688	596	568	365
45°	299	284	201	283	297	229
55°	108	90	70	90	106	100
65°	36	30	25	30	36	38
75°	10	9	8	9	10	11
85°	2	2	2	2	2	2
90°	0	0	0	0	0	



TEST NUMBER: P563820

CATALOG NUMBER: LD4C30D010 EX4C309030 4LCSQWH

**CANDELA DISTRIBUTION (FULL):**

	0°	22.5°	45°	67.5°	90°
0°	1834.8	1834.8	1834.8	1834.8	1834.8
2.5°	1830.2	1829.0	1828.5	1828.5	1829.0
5°	1811.1	1809.4	1809.9	1809.9	1810.5
7.5°	1780.4	1779.9	1778.1	1780.4	1780.4
10°	1744.6	1741.7	1737.6	1742.2	1744.6
12.5°	1707.5	1698.8	1691.9	1698.8	1707.5
15°	1669.9	1656.0	1639.8	1655.5	1671.7
17.5°	1620.7	1606.8	1588.9	1609.7	1625.4
20°	1540.3	1541.5	1534.5	1540.3	1543.2
22.5°	1411.3	1437.3	1473.8	1437.9	1407.2
25°	1218.6	1286.9	1390.4	1289.2	1225.0
27.5°	1012.0	1098.8	1268.3	1104.0	1018.4
30°	830.3	907.3	1097.7	912.5	831.5
32.5°	672.4	729.6	892.2	736.6	679.9
35°	566.5	594.8	688.0	596.0	568.2
37.5°	485.5	485.5	510.9	487.8	483.2
40°	424.7	406.2	373.8	405.6	424.7
42.5°	368.0	340.2	271.4	339.1	369.2
45°	299.1	284.1	201.4	282.9	296.8
47.5°	229.7	219.3	151.6	218.1	231.5
50°	179.4	163.2	116.9	162.0	178.8
52.5°	137.7	120.4	90.3	120.4	136.6
55°	107.6	90.3	70.0	90.3	106.5
57.5°	82.7	68.9	53.2	67.7	82.2
60°	63.1	51.5	41.7	51.5	63.6
62.5°	48.0	39.3	31.8	38.8	47.4
65°	36.5	29.5	24.9	29.5	35.9
67.5°	26.6	22.0	19.1	22.0	27.2
70°	19.7	16.8	14.5	16.2	19.7
72.5°	14.5	12.2	11.0	12.2	14.5
75°	9.8	8.7	8.1	8.7	9.8
77.5°	6.9	6.4	5.8	6.4	6.9
80°	4.6	4.1	4.1	4.6	4.6
82.5°	2.9	2.9	2.9	2.9	2.9
85°	1.7	1.7	1.7	1.7	1.7
87.5°	1.2	1.2	1.2	1.2	1.2
90°	0.0	0.0	0.0	0.0	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°    - - 45°-225°    - - - - 90°-270°







(END OF REPORT)