

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P#

Luminaire Tested: **LD4C40D010 EX4C409030 4LBSQH**

Issue Date: 2/9/2022



**Test Information**


Test Method: LM-79-08  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/9/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD4C40D010 EX4C409030 4LBSQH  
Description: 4 INCH 4000 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS  
AND 4LBSQ TRIM WITH H FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 3205.0 lumens  
Efficiency: N/A  
Efficacy: 68.2 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93  
Luminous Opening: Rectangular (W 0.33' x L: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 47  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P#  
CATALOG NUMBER: LD4C40D010 EX4C409030 4LBSQH

### Luminous Intensity Polar Plot

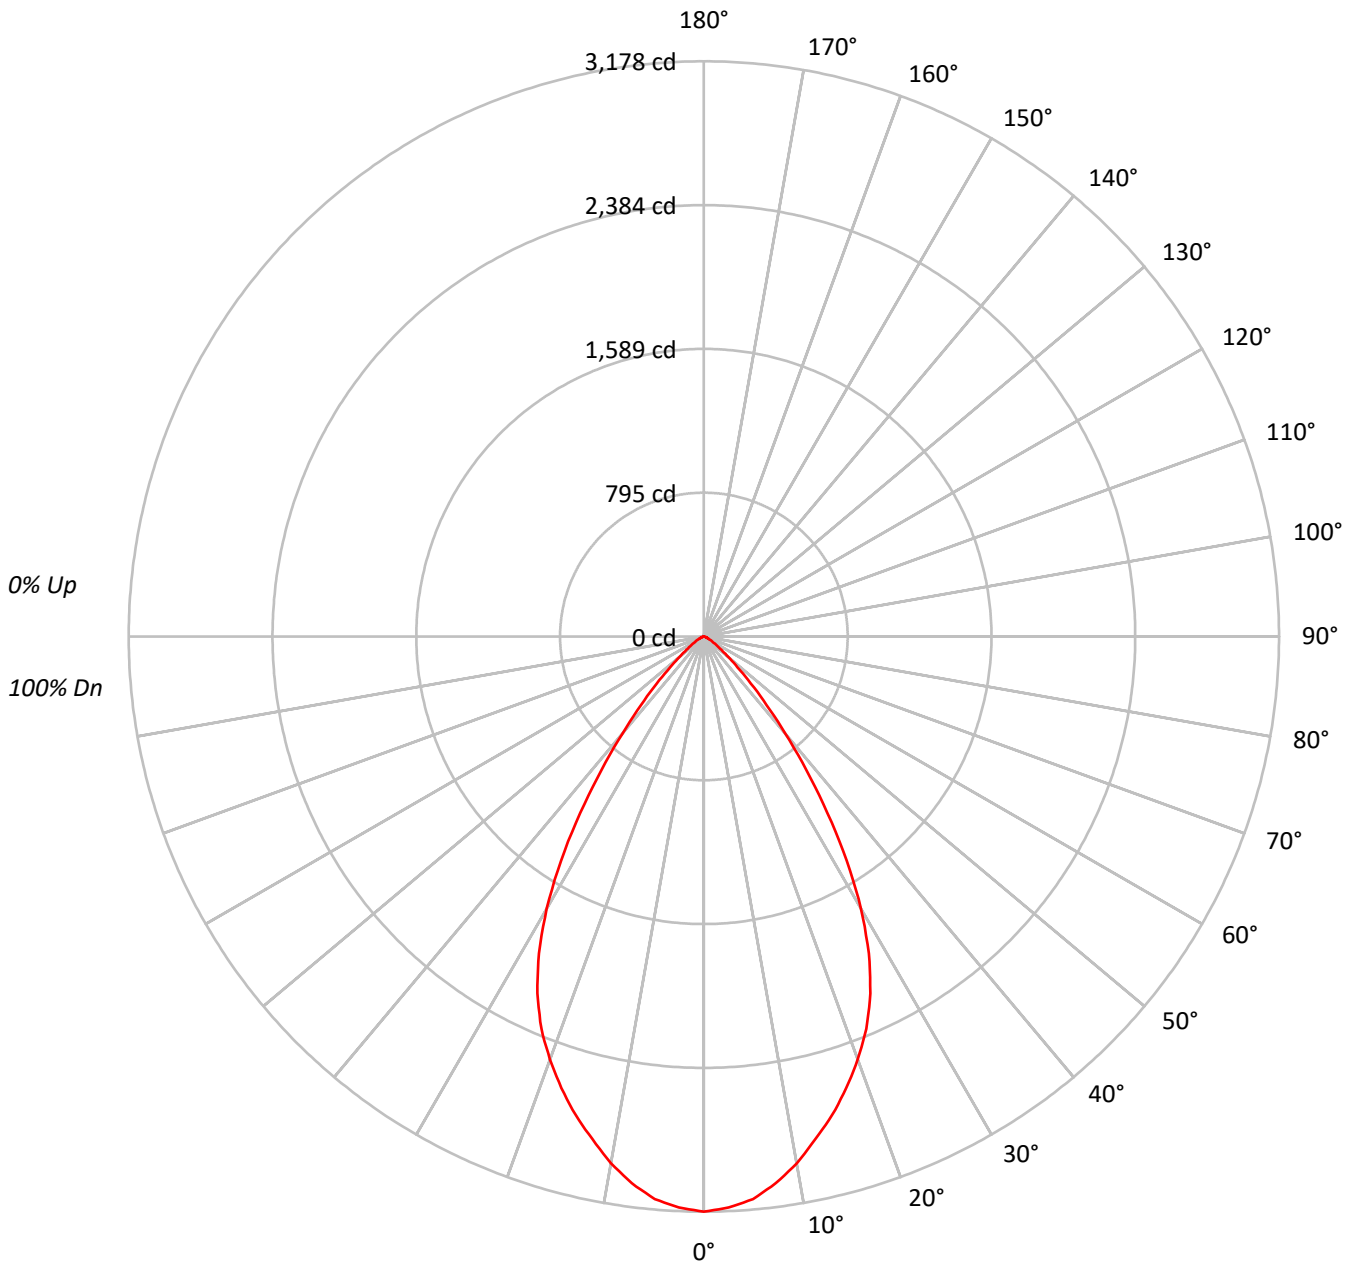



TEST NUMBER: P#

CATALOG NUMBER: LD4C40D010 EX4C409030 4LBSQH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100			100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93			93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85			85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	82	86	83	80	79			79
4	96	88	82	77	94	86	81	77	84	80	76	82	78	75	80	77	74	73			73
5	90	82	75	71	89	81	75	70	79	74	70	77	73	69	75	72	69	67			67
6	86	76	70	65	84	75	69	65	74	68	64	72	68	64	71	67	64	62			62
7	81	71	65	60	80	70	64	60	69	64	60	68	63	59	67	62	59	58			58
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54			54
9	73	63	56	52	72	62	56	52	61	56	52	60	55	52	59	55	52	50			50
10	69	59	53	49	68	59	53	49	58	52	49	57	52	48	56	52	48	47			47

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	306642
5°	302186
10°	289562
15°	273486
20°	255286
25°	231740
30°	193485
35°	140172
40°	87742
45°	50161
50°	26149
55°	14652
60°	9340
65°	5525
70°	4091
75°	1789
80°	2667
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD4C40D010 EX4C409030 4LBSQH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	292.4	9.1
10°-20°	767.2	23.9
20°-30°	985.9	30.8
30°-40°	741.8	23.1
40°-50°	297.9	9.3
50°-60°	84.7	2.6
60°-70°	26.8	0.8
70°-80°	7.6	0.2
80°-90°	0.7	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	2045.5	63.8
0°-40°	2787.3	87.0
0°-60°	3169.9	98.9
0°-90°	3205.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	3205.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	3178	
5°	3120	292
15°	2738	767
25°	2177	986
35°	1190	742
45°	368	298
55°	87	85
65°	24	27
75°	5	8
85°	0	1
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD4C40D010 EX4C409030 4LBSQH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	3178.0
2.5°	3158.6
5°	3119.9
7.5°	3047.3
10°	2955.4
12.5°	2844.3
15°	2737.8
17.5°	2616.8
20°	2486.2
22.5°	2346.1
25°	2176.7
27.5°	1973.5
30°	1736.6
32.5°	1470.4
35°	1190.0
37.5°	928.7
40°	696.6
42.5°	512.7
45°	367.6
47.5°	251.6
50°	174.2
52.5°	121.0
55°	87.1
57.5°	62.9
60°	48.4
62.5°	33.9
65°	24.2
67.5°	19.4
70°	14.5
72.5°	9.7
75°	4.8
77.5°	4.8
80°	4.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)