

Scaled data based on original data using  
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State  
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P#

Luminaire Tested: **LD4C05D010 EX4C059030 4LBSQH**

Issue Date: 2/9/2022



**Test Information**


Test Method: LM-79-08  
Report Number: P#  
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)  
Test Lab: INNOVATION CENTER  
Issue Date: 2/9/2022  
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)  
Product Line: PORTFOLIO  
Catalog Number: LD4C05D010 EX4C059030 4LBSQH  
Description: 4 INCH 500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3000K, 90CRI LEDS AND 4LBSQ TRIM WITH H FINISH  
Light Source: -  
Ballast/Driver: -

**Summary**

Lumens per Lamp: N/A  
Luminaire Lumens: 521.0 lumens  
Efficiency: N/A  
Efficacy: 72.4 lumens/watt  
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93  
Luminous Opening: Rectangular (W 0.33' x L: 0.33' x H: 0')  
CIE Type: Direct  
  
Input Watts (W): 7.2  
Input Voltage (V):  
Input Current (A<sub>in</sub>): NR  
Voltage Rise (V): NR  
Power Factor: NR  
Total Harmonic Distortion (THDi): NR  
Frequency (hertz): 60  
Stabilization Time: NR  
Operation Time: NR  
Ambient Temperature (°C): NR  
Test Distance: 25 FT

TEST NUMBER: P#  
CATALOG NUMBER: LD4C05D010 EX4C059030 4LBSQH

### Luminous Intensity Polar Plot

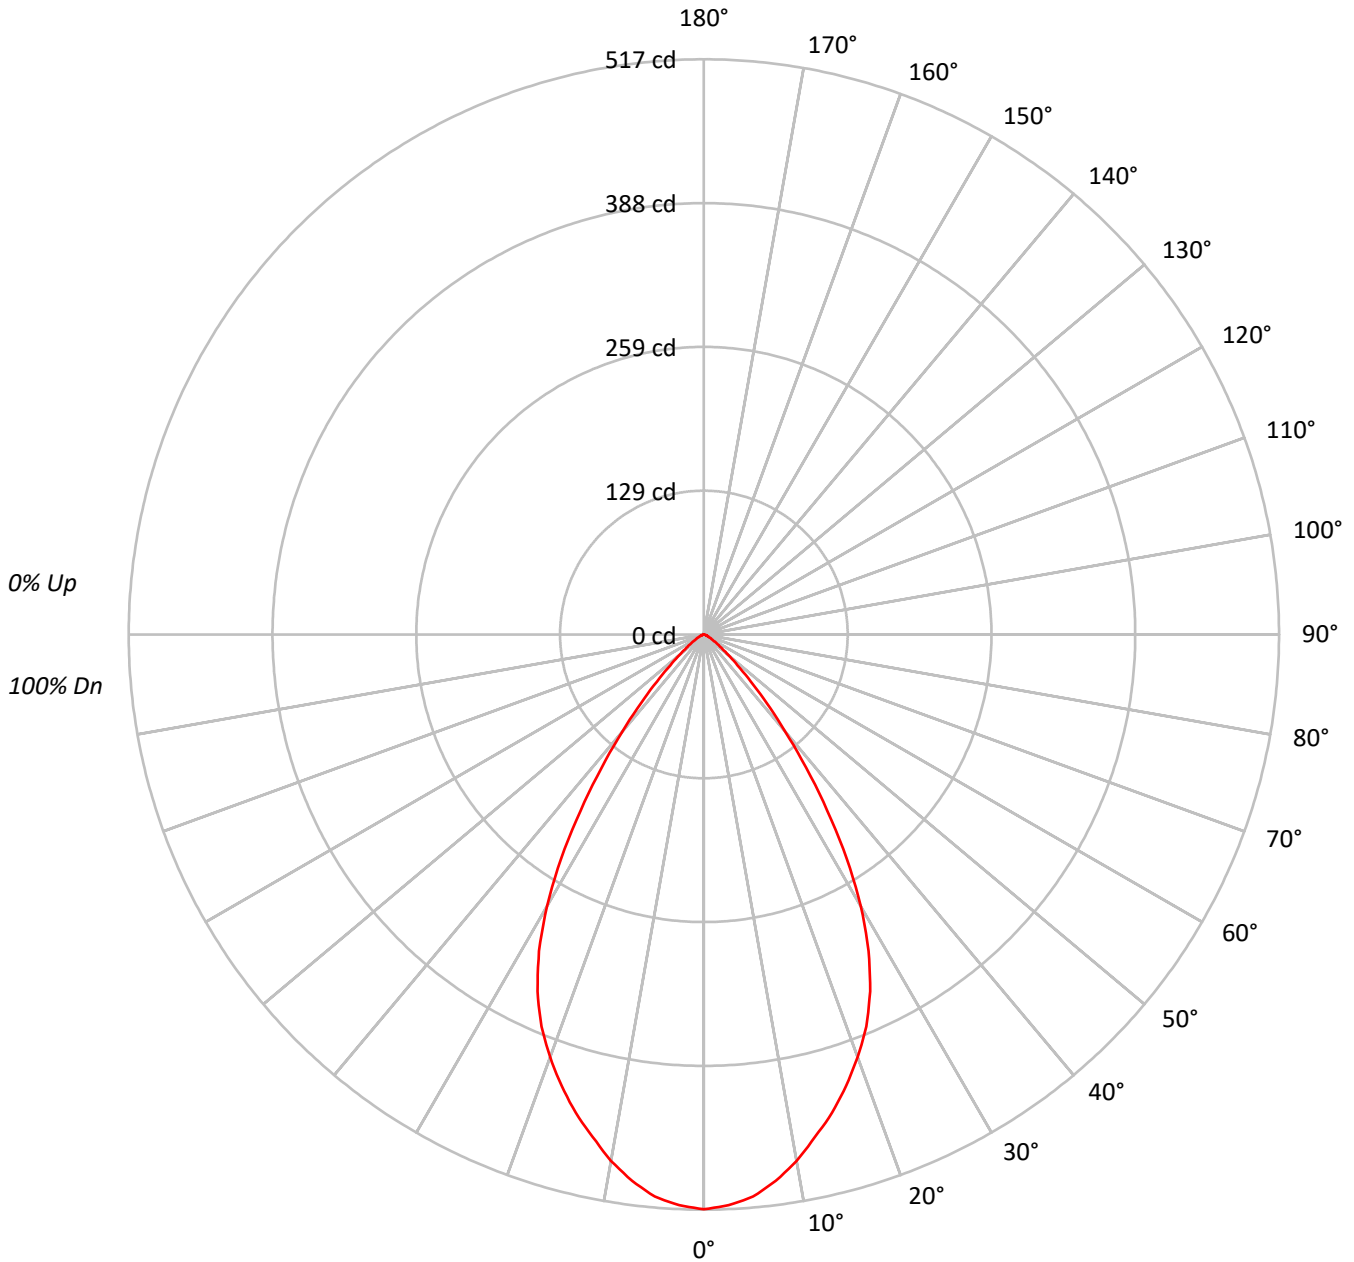



TEST NUMBER: P#

CATALOG NUMBER: LD4C05D010 EX4C059030 4LBSQH

**COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:**

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85	85	85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	82	86	83	80	79	79	79	79
4	96	88	82	77	94	86	81	77	84	80	76	82	78	75	80	77	74	73	73	73	73
5	90	82	75	71	89	81	75	70	79	74	70	77	73	69	75	72	69	67	67	67	67
6	86	76	70	65	84	75	69	65	74	68	64	72	68	64	71	67	64	62	62	62	62
7	81	71	65	60	80	70	64	60	69	64	60	68	63	59	67	62	59	58	58	58	58
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54	54	54	54
9	73	63	56	52	72	62	56	52	61	56	52	60	55	52	59	55	52	50	50	50	50
10	69	59	53	49	68	59	53	49	58	52	49	57	52	48	56	52	48	47	47	47	47

**AVERAGE LUMINANCE (cd/sqm):**

	0°
0°	49846
5°	49126
10°	47068
15°	44462
20°	41504
25°	37667
30°	31453
35°	22781
40°	14258
45°	8146
50°	4248
55°	2389
60°	1525
65°	890
70°	677
75°	298
80°	445
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD4C05D010 EX4C059030 4LBSQH

**ZONAL LUMENS:**

Zone	Lumens	% Fixture
0°-10°	47.5	9.1
10°-20°	124.7	23.9
20°-30°	160.3	30.8
30°-40°	120.6	23.1
40°-50°	48.4	9.3
50°-60°	13.8	2.6
60°-70°	4.3	0.8
70°-80°	1.3	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	332.5	63.8
0°-40°	453.1	87.0
0°-60°	515.3	98.9
0°-90°	521.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	521.0	100.0

**CANDELA DISTRIBUTION:**

	0°	Flux
0°	517	
5°	507	48
15°	445	125
25°	354	160
35°	193	121
45°	60	48
55°	14	14
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD4C05D010 EX4C059030 4LBSQH

**CANDELA DISTRIBUTION (FULL):**

	0°
0°	516.6
2.5°	513.5
5°	507.2
7.5°	495.4
10°	480.4
12.5°	462.4
15°	445.1
17.5°	425.4
20°	404.2
22.5°	381.4
25°	353.8
27.5°	320.8
30°	282.3
32.5°	239.0
35°	193.4
37.5°	151.0
40°	113.2
42.5°	83.3
45°	59.7
47.5°	40.9
50°	28.3
52.5°	19.7
55°	14.2
57.5°	10.2
60°	7.9
62.5°	5.5
65°	3.9
67.5°	3.1
70°	2.4
72.5°	1.6
75°	0.8
77.5°	0.8
80°	0.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG







— 0°-180°







(END OF REPORT)