

Scaled data based on original data using
LM-79-08 Approved Method: Electrical and Photometric Measurements of Solid-State
Lighting Products

Test Report Prepared for

Cooper Lighting Solutions

(formerly Eaton)

Brand: PORTFOLIO

Report Number: P#

Luminaire Tested: **LD4C05D010 EX4C059035 4LBSQH**

Issue Date: 2/9/2022



Test Information

Test Method: LM-79-08
Report Number: P#
TEST IS SCALED FROM IESNA LM-79-08 TEST DATA (P207151)
Test Lab: INNOVATION CENTER
Issue Date: 2/9/2022
Manufacturer: COOPER LIGHTING SOLUTIONS (FORMERLY EATON)
Product Line: PORTFOLIO
Catalog Number: LD4C05D010 EX4C059035 4LBSQH
Description: 4 INCH 500 LUMEN PORTFOLIO LED DOWNLIGHT WITH, 3500K, 90CRI LEDS AND 4LBSQ TRIM WITH H FINISH
Light Source: -
Ballast/Driver: -


Summary

Lumens per Lamp: N/A
Luminaire Lumens: 528.0 lumens
Efficiency: N/A
Efficacy: 73.3 lumens/watt
Spacing Criteria (0/90/45): 0.95 / 0.95 / 0.93
Luminous Opening: Rectangular (W 0.33' x L: 0.33' x H: 0')
CIE Type: Direct

Input Watts (W): 7.2
Input Voltage (V):
Input Current (A_{in}): NR
Voltage Rise (V): NR
Power Factor: NR
Total Harmonic Distortion (THDi): NR
Frequency (hertz): 60
Stabilization Time: NR
Operation Time: NR
Ambient Temperature (°C): NR
Test Distance: 25 FT

TEST NUMBER: P#
CATALOG NUMBER: LD4C05D010 EX4C059035 4LBSQH

Luminous Intensity Polar Plot

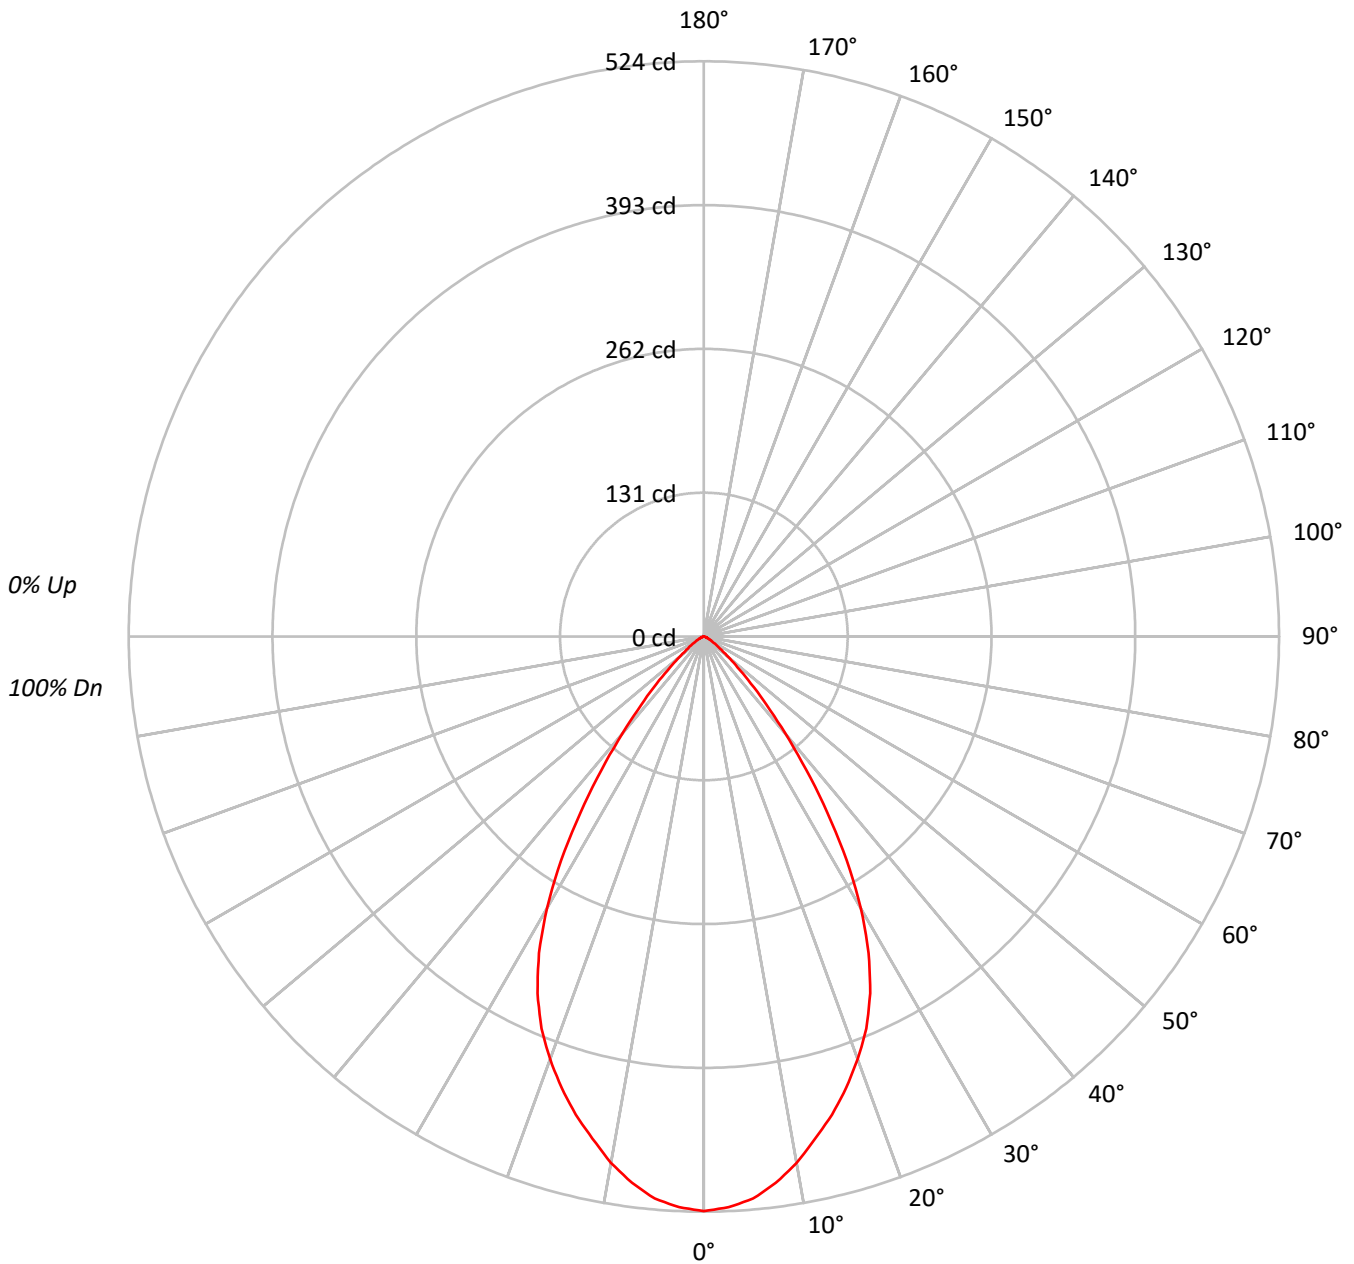



TEST NUMBER: P#

CATALOG NUMBER: LD4C05D010 EX4C059035 4LBSQH

COEFFICIENT OF UTILIZATION - ZONAL CAVITY METHOD:

RF	20				20				20				20				20				
RC	80				70				50				30				10			0	
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	50	30	10	0
RCR																					
0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	100	100	100
1	113	110	108	105	111	108	106	104	104	102	100	100	99	97	97	96	95	93	93	93	93
2	107	102	98	94	105	100	96	93	97	94	91	94	91	89	91	89	87	85	85	85	85
3	101	94	89	85	99	93	88	84	90	86	83	88	84	82	86	83	80	79	79	79	79
4	96	88	82	77	94	86	81	77	84	80	76	82	78	75	80	77	74	73	73	73	73
5	90	82	75	71	89	81	75	70	79	74	70	77	73	69	75	72	69	67	67	67	67
6	86	76	70	65	84	75	69	65	74	68	64	72	68	64	71	67	64	62	62	62	62
7	81	71	65	60	80	70	64	60	69	64	60	68	63	59	67	62	59	58	58	58	58
8	77	67	60	56	75	66	60	56	65	59	56	64	59	55	63	58	55	54	54	54	54
9	73	63	56	52	72	62	56	52	61	56	52	60	55	52	59	55	52	50	50	50	50
10	69	59	53	49	68	59	53	49	58	52	49	57	52	48	56	52	48	47	47	47	47

AVERAGE LUMINANCE (cd/sqm):

	0°
0°	50512
5°	49785
10°	47705
15°	45052
20°	42058
25°	38178
30°	31876
35°	23087
40°	14460
45°	8269
50°	4308
55°	2406
60°	1544
65°	913
70°	677
75°	298
80°	445
85°	0



TEST NUMBER: P#

CATALOG NUMBER: LD4C05D010 EX4C059035 4LBSQH

ZONAL LUMENS:

Zone	Lumens	% Fixture
0°-10°	48.2	9.1
10°-20°	126.4	23.9
20°-30°	162.4	30.8
30°-40°	122.2	23.1
40°-50°	49.1	9.3
50°-60°	13.9	2.6
60°-70°	4.4	0.8
70°-80°	1.3	0.2
80°-90°	0.1	0.0
90°-100°	0.0	0.0
100°-110°	0.0	0.0
110°-120°	0.0	0.0
120°-130°	0.0	0.0
130°-140°	0.0	0.0
140°-150°	0.0	0.0
150°-160°	0.0	0.0
160°-170°	0.0	0.0
170°-180°	0.0	0.0
0°-30°	337.0	63.8
0°-40°	459.2	87.0
0°-60°	522.2	98.9
0°-90°	528.0	100.0
90°-120°	0.0	0.0
90°-150°	0.0	0.0
90°-180°	0.0	0.0
0°-180°	528.0	100.0

CANDELA DISTRIBUTION:

	0°	Flux
0°	524	
5°	514	48
15°	451	126
25°	359	162
35°	196	122
45°	61	49
55°	14	14
65°	4	4
75°	1	1
85°	0	0
90°	0	



TEST NUMBER: P#

CATALOG NUMBER: LD4C05D010 EX4C059035 4LBSQH

CANDELA DISTRIBUTION (FULL):

	0°
0°	523.5
2.5°	520.4
5°	514.0
7.5°	502.0
10°	486.9
12.5°	468.6
15°	451.0
17.5°	431.1
20°	409.6
22.5°	386.5
25°	358.6
27.5°	325.1
30°	286.1
32.5°	242.2
35°	196.0
37.5°	153.0
40°	114.8
42.5°	84.5
45°	60.6
47.5°	41.5
50°	28.7
52.5°	19.9
55°	14.3
57.5°	10.4
60°	8.0
62.5°	5.6
65°	4.0
67.5°	3.2
70°	2.4
72.5°	1.6
75°	0.8
77.5°	0.8
80°	0.8
82.5°	0.0
85°	0.0
87.5°	0.0
90°	0.0



Report Generated By 670246072 / DESKTOP-50001EG





— 0°-180°







(END OF REPORT)